

# WxS 880-012

CO Sensor

## Product Highlights



- ✓ CO sensor
- ✓ High sensitivity, high resolution, detection range 0~1000ppm
- ✓ Low power consumption, working voltage 3V, current <5mA
- ✓ Using the environment: - 20 °C to 50 °C; 15% ~ 90% RH
- ✓ Output UART or analog voltage
- ✓ Cross-threshold report, plus periodic report every 2 hours (the threshold and the periodic report cycle are both user-configurable)
- ✓ OTA (Over The Air) firmware upgrade, including to upgrade loader and application images
- ✓ Analog and digital interface for external sensor connectivity and pulse counting (MPI)
- ✓ Low power consumption, 5 – 10 years of battery operational life with 2 x AA Li-SOCI2 Battery
- ✓ Optional DC 5V power source
- ✓ Integrated internal antenna, or optional external SMA/IPEX antenna
- ✓ Up to 5km reach in NLoS (Non-Line-of-Sight) and up to 18km LoS (Line-of-Sight) environments
- ✓ IP67 enclosure rating



## Application Architecture




## Specifications


Parameter	Value
<b>Sensor</b>	
CO	Range: 0-1000 PPM Resolution: 0.5 PPM Response time (T90) : <50S 50S Working voltage 5V, Current < 5 ma Using the environment: - 20 °C to 50 °C;15% ~ 90% RH Output: UART or analog voltage
Data Report	Cross-threshold report, plus periodic report every 2 hours (the threshold and the periodic report cycle are both user-configurable)
Intensive data sampling and averaging	Support intensive data sampling and averaging to improve data accuracy
<b>Wireless</b>	
ISM Band	EU 863 – 870MHz; US 902 – 928MHz China 779 – 787MHz; EU 433MHz AS 923MHz; CN 470 – 510MHz
Maximum Link Budget	168dB
Distance	Up to 5km NLOS; up to 18km LOS
Antenna	Integrated internal antenna or external 1/2 wavelength whip antenna (SMA)
<b>Mechanical</b>	
Dimension	60mm x 100mm x 30mm (WxS8800)
IP rating	IP67 (WxS8800)
Operating Temperature	-40C to +85C (WxS8800);
Cable length	0.5 meters
Total Weight	120 g
<b>Electrical</b>	
Supply Voltage	3.0 – 3.8 VDC
Power Type	Replaceable 1 or 2 AA 3.6V Li-SOCI2 Battery; DC 4.5V – 12V optional
<b>Compliance/Certification</b>	
 <b>LoRa Alliance</b>	LoRaWAN 1.0.2
	FCC(America): 2A07W-WXS8000, IC(Canada): 23701-WXS8000 CE(European Union): B1810246 ROHS(European Union): R2BJ180927F0664E

## Installation Guide


The following figure shows the specification and pin definition of the CO sensor

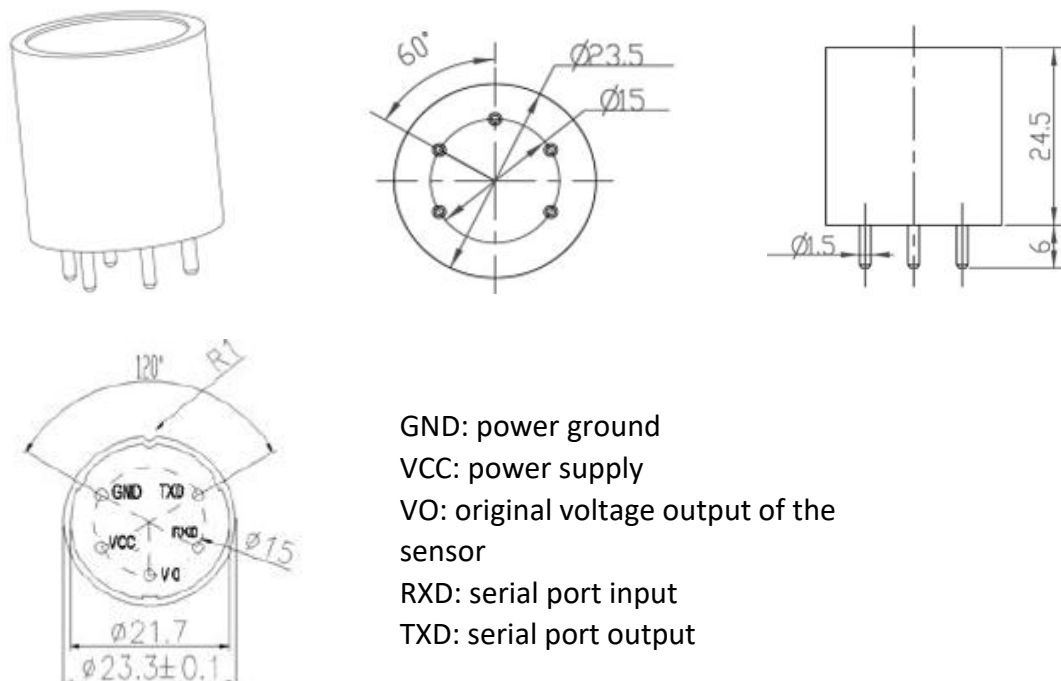

Below diagram shows the general installation guide for WxS8800, it can be installed on any flat and solid surface, the lid is contacted with the surface and fixed via 2 self-tapping screws:

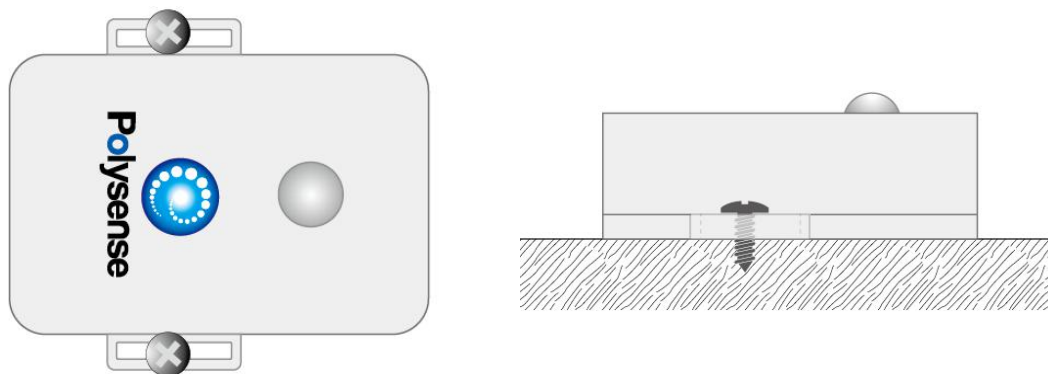

Below is the recommendation of the self-tapping screw and its sizes:

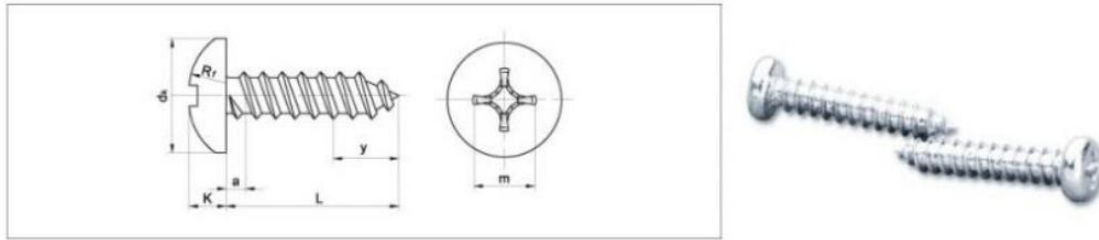

螺纹规格		ST2.2	ST2.9	ST3.5	ST4.2	ST4.8	ST5.5	ST6.3
dk	min	3.7	5.3	6.64	7.64	9.14	10.57	11.57
K	min	1.4	2.15	2.35	2.8	3.4	3.7	4.3
m		1.9	3	3.9	4.4	4.9	6.4	6.9
L		4.5mm~100mm						

## The Sample Application

### ● AQI Index detection

The measured concentration of various pollutants has become an important indicator of AQI: sulfur dioxide (SO<sub>2</sub>); Nitrogen dioxide (NO<sub>2</sub>); And ozone (O<sub>3</sub>); Carbon monoxide (CO); For CO concentration calculation, the zero voltage and test point voltage provided by the manufacturer shall be used for calculation.

For example, when leaving the factory, the zero-point voltage V<sub>out0</sub> = 0.6v; when 200ppm, V<sub>out1</sub> = 0.9v; the current V<sub>0</sub> voltage V<sub>outx</sub> = 1.2v; then the CO concentration N in the current environment = 200 / (v<sub>out1</sub> - v<sub>out0</sub>) \* (v<sub>outx</sub> - v<sub>out0</sub>) = 400ppm.



### ● Detection of indoor gas leakage

The kitchen, living room and other indoor installation of CO sensors, accurate detection of gas leakage in closed space and timely alarm.



- **Detect CO and other gases released in the non-combustion phase**

Detect whether the humidity of the environment has reached the combustion index. Once it has reached the target, the sensor will give early warning. In the following non-combustion stage, smoke is released, which may contain CO<sub>2</sub>, CO and other gases. The sensor will alarm and detect the temperature after combustion.





# Polysense Technologies

## About Polysense

Polysense develops products and solutions for Industrial IoT and smart homes, including distributed fiber sensing, LPWAN LoRa and NB-IoT based wireless IoT sensors, Passive Optical Network (PONs) and cloud based data management and analytic platform.

## Contact Polysense

Silicon Valley Office

Address : 3000 Scott Blvd, Suite 108  
Santa Clara, CA 95054

Telephone : 408 980 9466

Mailbox : info@polysense.net



Beijing Office

Address : 26 Shangdi Xinxu Road. Room 0820  
Haidian Dist. Beijing China 100085

Telephone : 010- 60607008

Mailbox : info@polysense.net



Shanghai Office

Address : 88 Shengrong Road, Building 1,  
Room 416, Pudong Dist, Shanghai,  
China 200120

Mailbox : info@polysense.net



Luoyang Office

Address : 2 Chongqing Road, 6/F CITIC Marketing  
Building, Jianxi Dist. Luoyang, Henan  
Province, China 471039

Telephone : 0379-62220518

Mailbox : info@polysense.net

