


## Silicon Switching Diode

- For high-speed switching applications




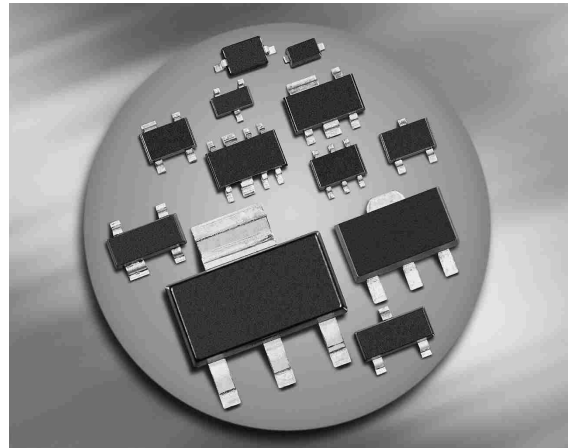


**BAS16**  
**BAS16W**

**BAS16-02L**  
**BAS16-02V**  
**BAS16-02W**  
**BAS16-03W**

**BAS16S**  
**BAS16U**

**BAS16-07L4**



| Type        | Package  | Configuration           | Marking |
|-------------|----------|-------------------------|---------|
| BAS16       | SOT23    | single                  | A6s     |
| BAS16-02L*  | TSLP-2-1 | single, leadless        | A6      |
| BAS16-02V   | SC79     | single                  | 6       |
| BAS16-02W   | SCD80    | single                  | A6      |
| BAS16-03W   | SOD323   | single                  | B       |
| BAS16-07L4* | TSLP-4-4 | parallel pair, leadless | 6A      |
| BAS16S      | SOT363   | parallel triple         | A6s     |
| BAS16U      | SC74     | parallel triple         | A6s     |
| BAS16W      | SOT323   | single                  | A6s     |

\* Preliminary Data

**Maximum Ratings** at  $T_A = 25^\circ\text{C}$ , unless otherwise specified

| Parameter                                          | Symbol           | Value       | Unit             |
|----------------------------------------------------|------------------|-------------|------------------|
| Diode reverse voltage                              | $V_R$            | 80          | V                |
| Peak reverse voltage                               | $V_{RM}$         | 85          |                  |
| Forward current                                    | $I_F$            |             | mA               |
| BAS16                                              |                  | 250         |                  |
| BAS16-02L, -07L4                                   |                  | 200         |                  |
| BAS16-02V, -02W                                    |                  | 200         |                  |
| BAS16-03W                                          |                  | 250         |                  |
| BAS16S                                             |                  | 200         |                  |
| BAS16U                                             |                  | 200         |                  |
| BAS16W                                             |                  | 250         |                  |
| Non-repetitive peak surge forward current          | $I_{FSM}$        |             | A                |
| $t = 1 \mu\text{s}$ , BAS16/ S/ U/ W/ -03W         |                  | 4.5         |                  |
| $t = 1 \mu\text{s}$ , BAS16-02L/ -02V/ -02W/ -07L4 |                  | 2.5         |                  |
| $t = 1 \text{ s}$                                  |                  | 0.5         |                  |
| Total power dissipation                            | $P_{\text{tot}}$ |             | mW               |
| BAS16, $T_S \leq 54^\circ\text{C}$                 |                  | 370         |                  |
| BAS16-02L, -07L4, $T_S \leq 130^\circ\text{C}$     |                  | 250         |                  |
| BAS16-02V, -02W, $T_S \leq 120^\circ\text{C}$      |                  | 250         |                  |
| BAS16-03W, $T_S \leq 116^\circ\text{C}$            |                  | 250         |                  |
| BAS16S, $T_S \leq 85^\circ\text{C}$                |                  | 250         |                  |
| BAS16U, $T_S \leq 113^\circ\text{C}$               |                  | 250         |                  |
| BAS16W, $T_S \leq 119^\circ\text{C}$               |                  | 250         |                  |
| Junction temperature                               | $T_j$            | 150         | $^\circ\text{C}$ |
| Storage temperature                                | $T_{\text{stg}}$ | -65 ... 150 |                  |

**Thermal Resistance**

| Parameter                                | Symbol     | Value      | Unit |
|------------------------------------------|------------|------------|------|
| Junction - soldering point <sup>1)</sup> | $R_{thJS}$ |            | K/W  |
| BAS16, BAS16S                            |            | $\leq 260$ |      |
| BAS16-02L, -07L4                         |            | $\leq 80$  |      |
| BAS16-02V, -02W                          |            | $\leq 120$ |      |
| BAS16-03W                                |            | $\leq 135$ |      |
| BAS16U                                   |            | $\leq 150$ |      |
| BAS16W                                   |            | $\leq 125$ |      |


**Electrical Characteristics at  $T_A = 25^\circ\text{C}$ , unless otherwise specified**

| Parameter                                                                                                                                                  | Symbol     | Values                |                       |                                    | Unit          |
|------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|-----------------------|-----------------------|------------------------------------|---------------|
|                                                                                                                                                            |            | min.                  | typ.                  | max.                               |               |
| DC Characteristics                                                                                                                                         |            |                       |                       |                                    |               |
| Breakdown voltage<br>$I_{(BR)} = 100\text{ }\mu\text{A}$                                                                                                   | $V_{(BR)}$ | 85                    | -                     | -                                  | V             |
| Reverse current<br>$V_R = 75\text{ V}$<br>$V_R = 25\text{ V}, T_A = 150\text{ }^{\circ}\text{C}$<br>$V_R = 75\text{ V}, T_A = 150\text{ }^{\circ}\text{C}$ | $I_R$      | -<br>-<br>-           | -<br>-<br>-           | 0.1<br>30<br>50                    | $\mu\text{A}$ |
| Forward voltage<br>$I_F = 1\text{ mA}$<br>$I_F = 10\text{ mA}$<br>$I_F = 50\text{ mA}$<br>$I_F = 100\text{ mA}$<br>$I_F = 150\text{ mA}$                   | $V_F$      | -<br>-<br>-<br>-<br>- | -<br>-<br>-<br>-<br>- | 715<br>855<br>1000<br>1200<br>1250 | mV            |
| Forward recovery voltage<br>$I_F = 10\text{ mA}, t_P = 20\text{ ns}$                                                                                       | $V_{fr}$   | -                     | -                     | 1.75                               | V             |

<sup>1)</sup>For calculation of  $R_{thJA}$  please refer to Application Note Thermal Resistance

**Electrical Characteristics** at  $T_A = 25^\circ\text{C}$ , unless otherwise specified

| Parameter                                                                                                                             | Symbol   | Values |      |      | Unit |
|---------------------------------------------------------------------------------------------------------------------------------------|----------|--------|------|------|------|
|                                                                                                                                       |          | min.   | typ. | max. |      |
| AC Characteristics                                                                                                                    |          |        |      |      |      |
| Diode capacitance<br>$V_R = 0\text{ V}$ , $f = 1\text{ MHz}$                                                                          | $C_T$    | -      | -    | 2    | pF   |
| Reverse recovery time<br>$I_F = 10\text{ mA}$ , $I_R = 10\text{ mA}$ , measured at $I_R = 1\text{ mA}$ ,<br>$R_L = 100\text{ }\Omega$ | $t_{rr}$ | -      | -    | 4    | ns   |

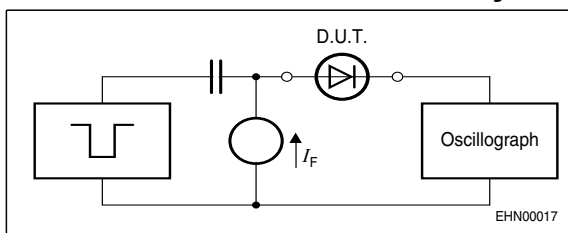
**Test circuit for reverse recovery time**


Pulse generator:  $t_p = 100\text{ ns}$ ,  $D = 0.05$ ,  $t_r = 0.6\text{ ns}$ ,  
 $R_i = 50\ \Omega$

Oscilloscope:  $R = 50\ \Omega$ ,  $t_r = 0.35\text{ ns}$ ,  $C = 0.05\text{ pF}$


**Reverse current  $I_R = f(T_A)$**

$V_R$  = Parameter

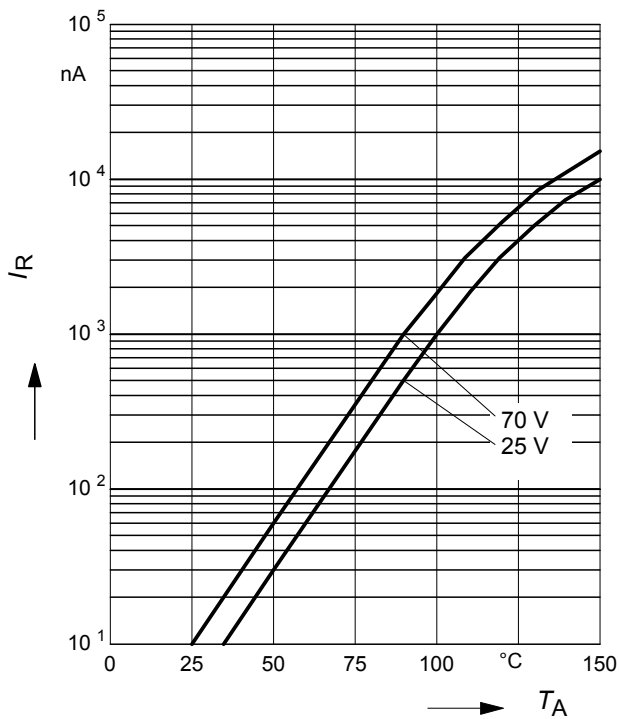


**Forward Voltage  $V_F = f(T_A)$**

$I_F$  = Parameter

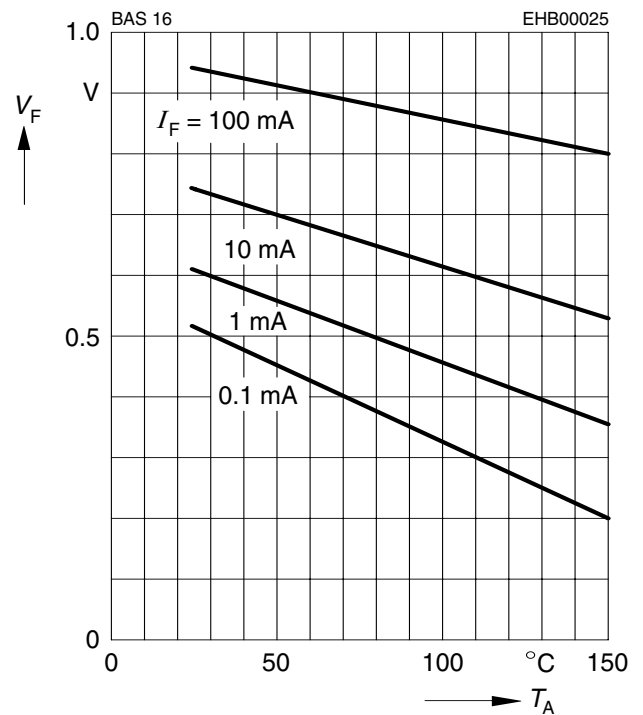


**Forward current  $I_F = f(V_F)$**

$T_A = 25^\circ\text{C}$

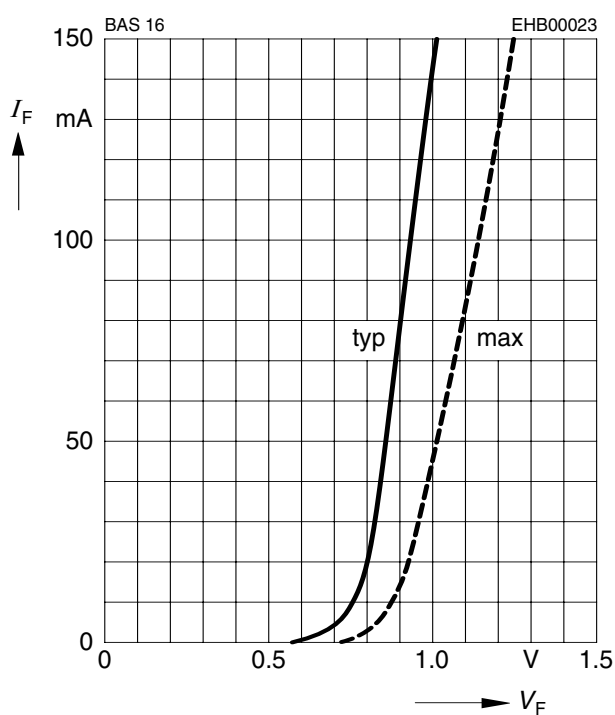


**Forward current  $I_F = f(T_S)$**

BAS16

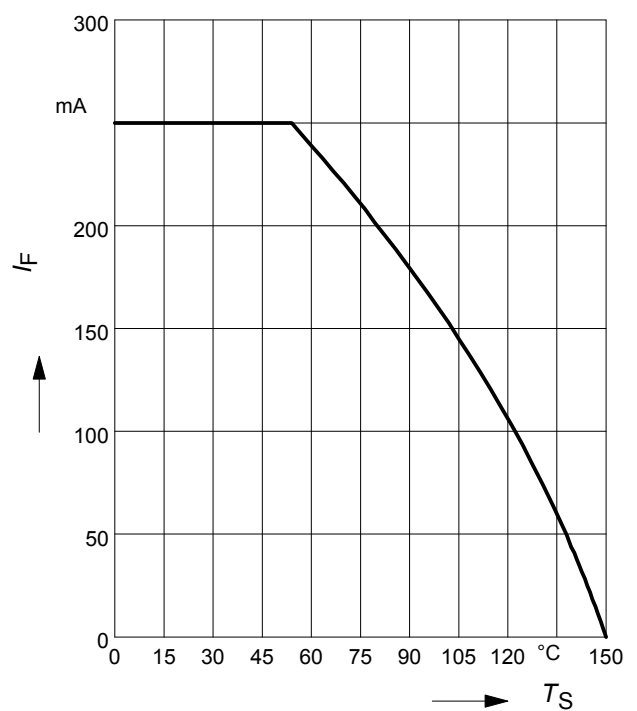


**Forward current  $I_F = f(T_S)$**

BAS16-02L, -07L4

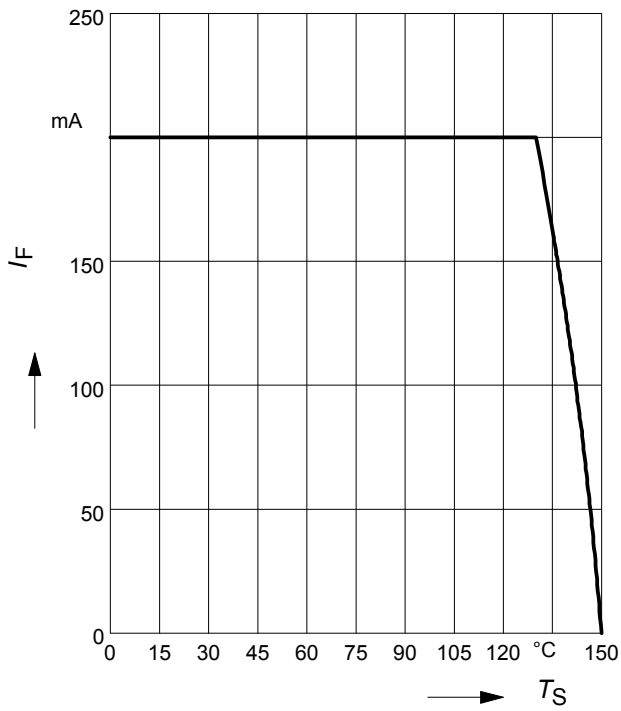


**Forward current  $I_F = f(T_S)$**

BAS16-02V, -02W

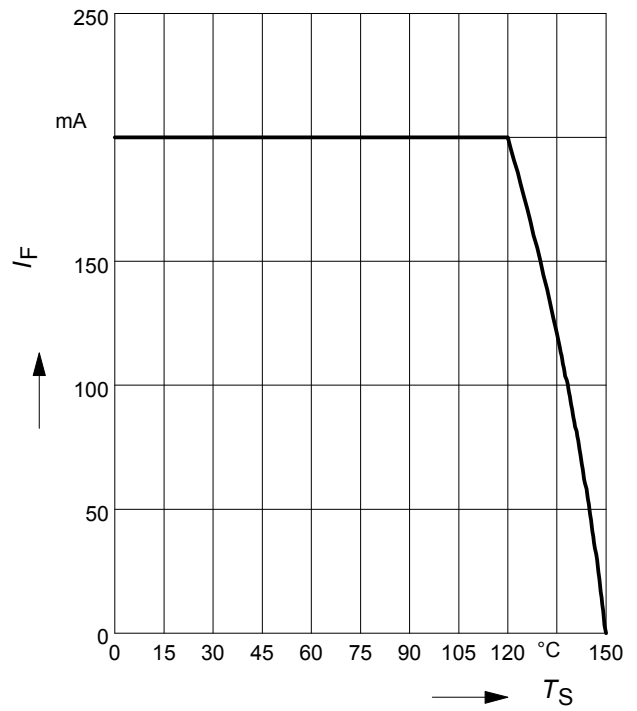


**Forward current  $I_F = f(T_S)$**

BAS16-03W

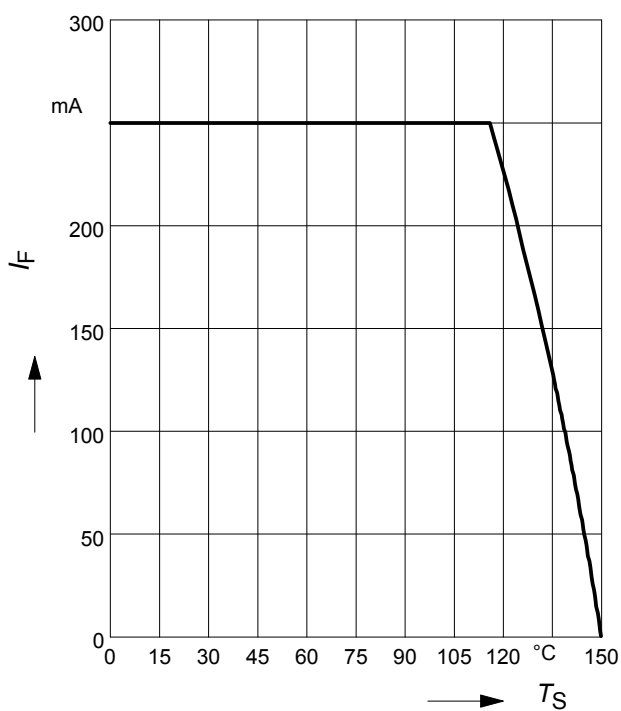


**Forward current  $I_F = f(T_S)$**

BAS16S

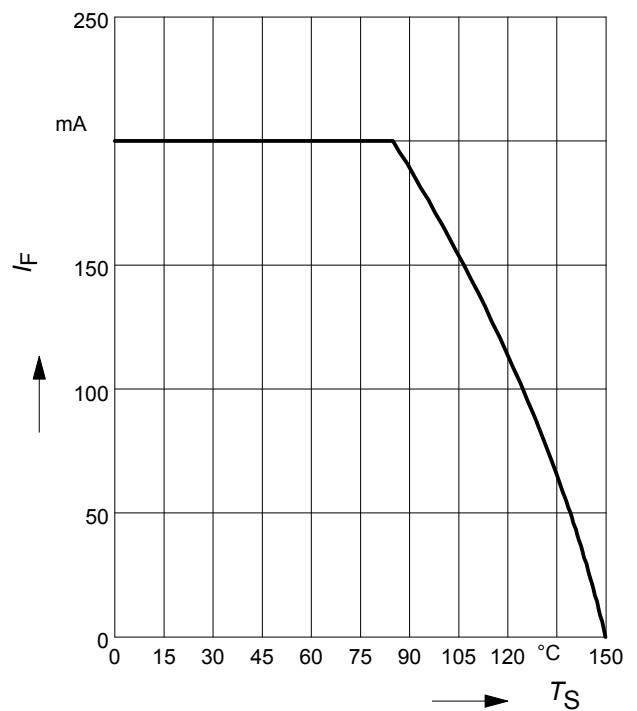


**Forward current  $I_F = f(T_S)$**

**BAS16U**

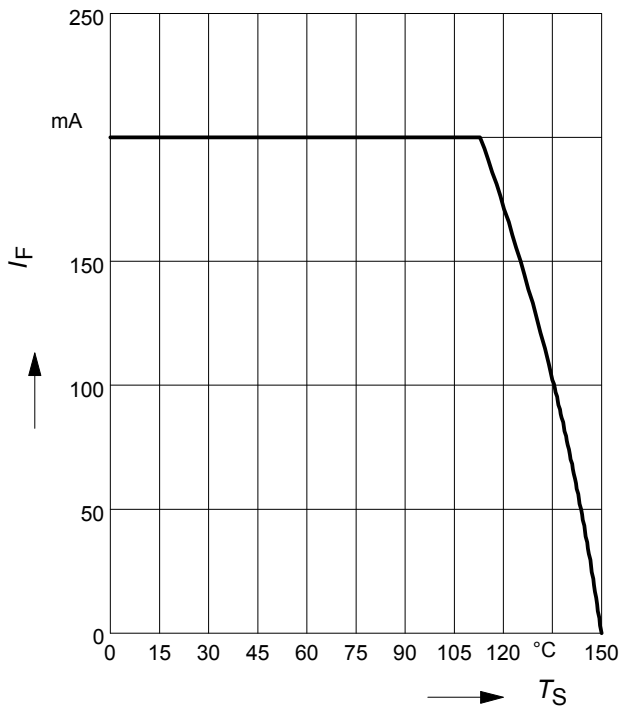


**Forward current  $I_F = f(T_S)$**

**BAS16W**

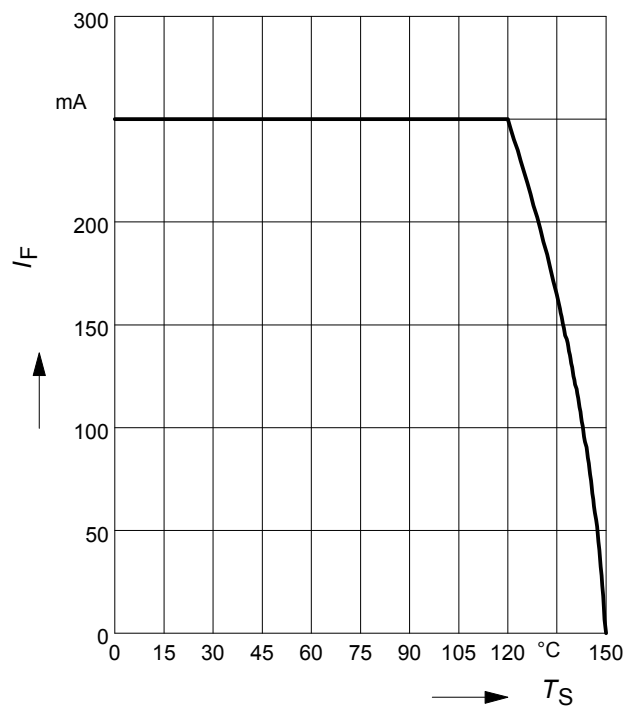

**Permissible Puls Load  $R_{thJS} = f(t_p)$**


**BAS16**

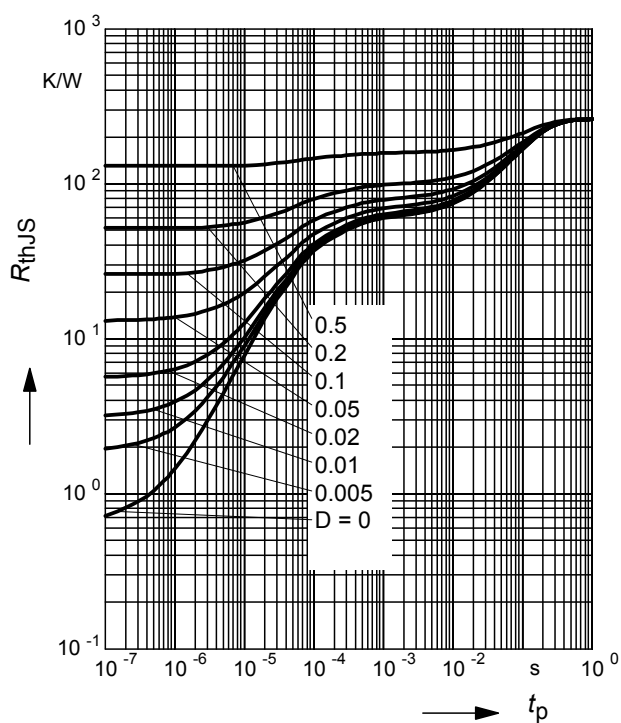

**Permissible Pulse Load**


$I_{Fmax}/I_{FDC} = f(t_p)$

**BAS16**

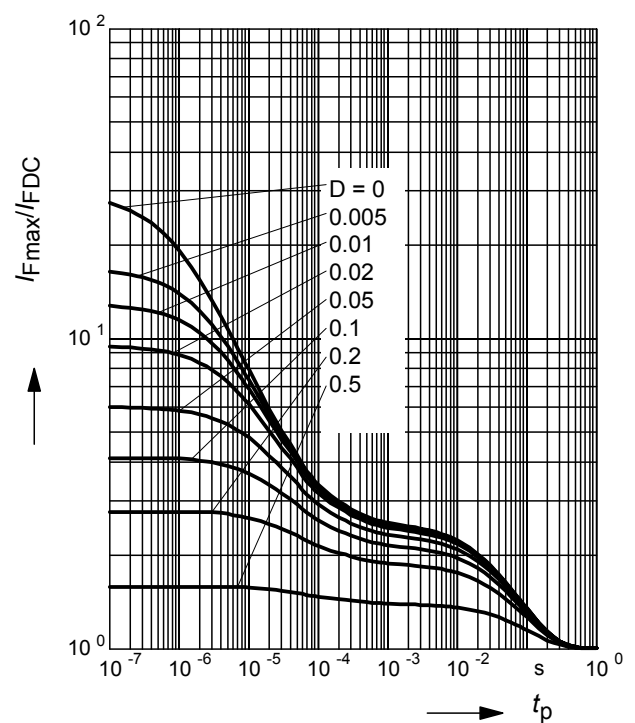

**Permissible Puls Load  $R_{thJS} = f(t_p)$**


BAS16-02L, -07L4

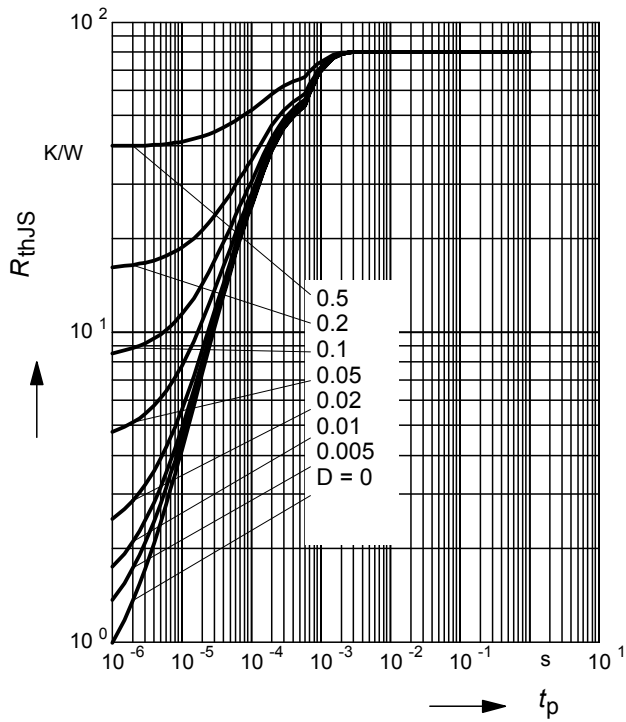

**Permissible Pulse Load**


$I_{Fmax} / I_{FDC} = f(t_p)$

BAS16-02L, -07L4

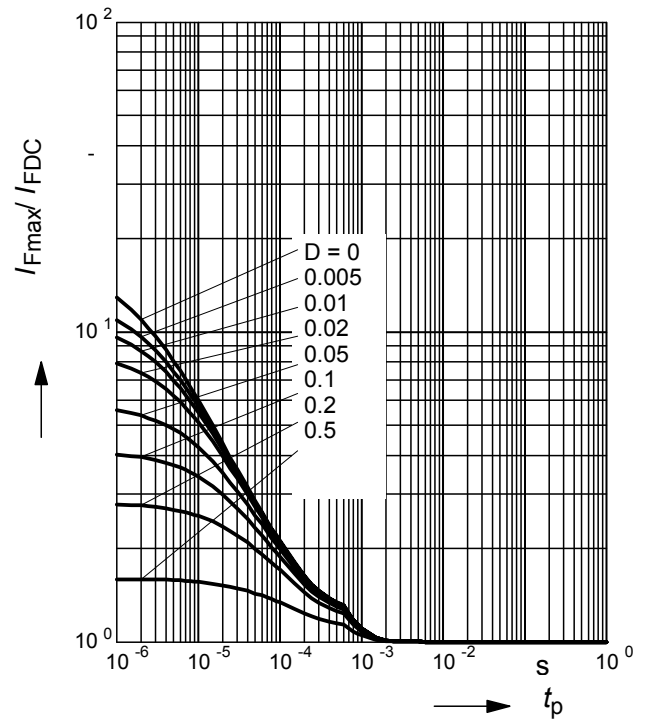

**Permissible Puls Load  $R_{thJS} = f(t_p)$**


BAS16-02V, -02W

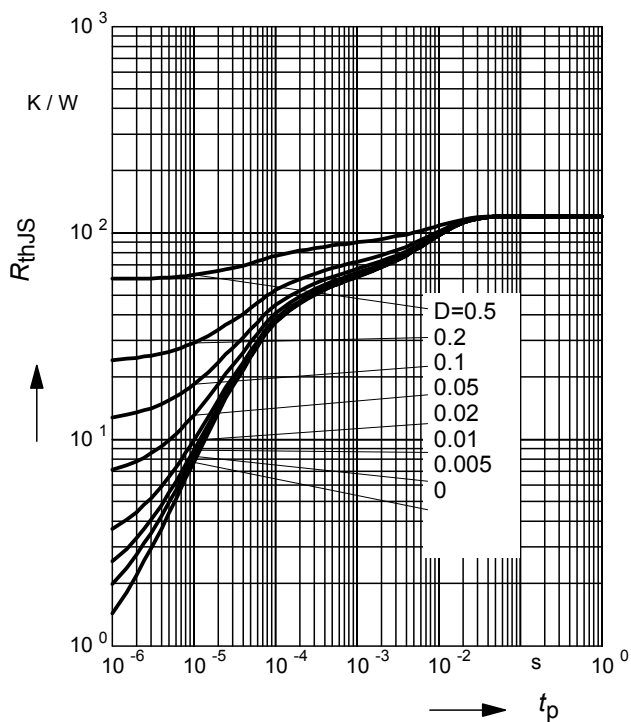

**Permissible Pulse Load**


$I_{Fmax} / I_{FDC} = f(t_p)$

BAS16-02V, -02W

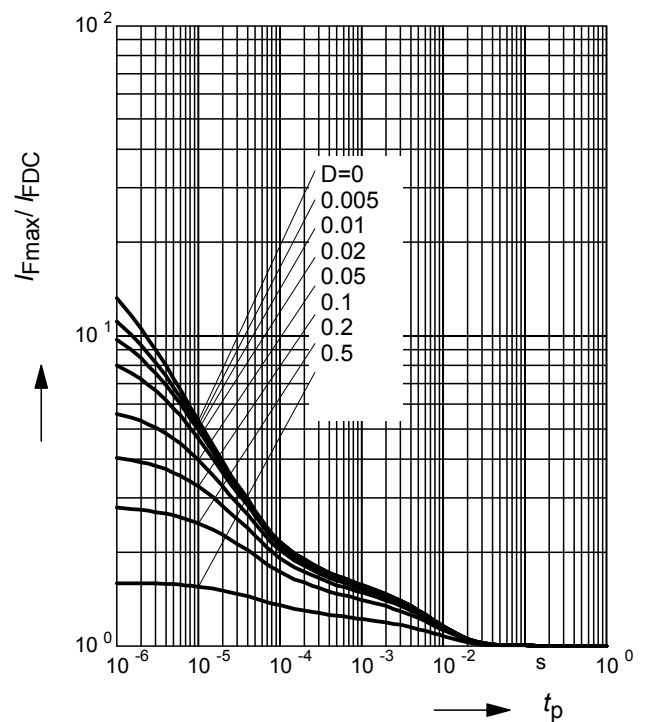

### Permissible Puls Load $R_{thJS} = f(t_p)$


BAS16-03W

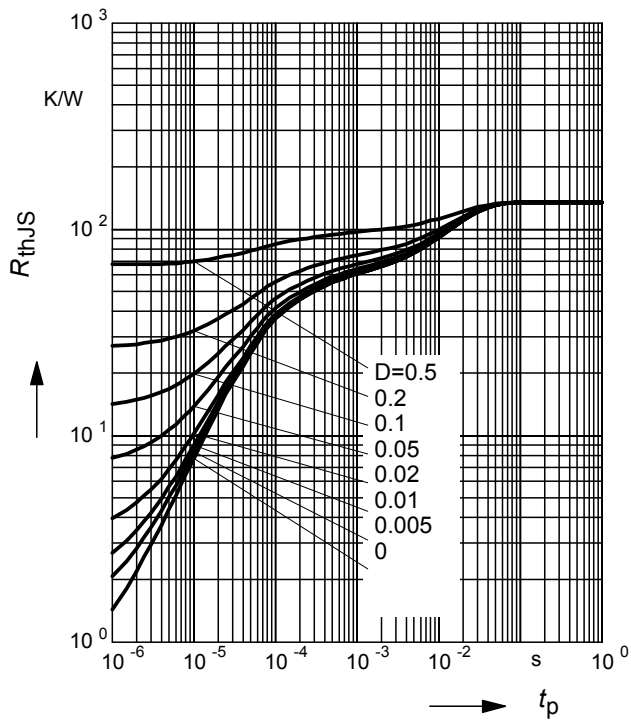

### Permissible Pulse Load


$$I_{Fmax}/I_{FDC} = f(t_p)$$

BAS16-03W

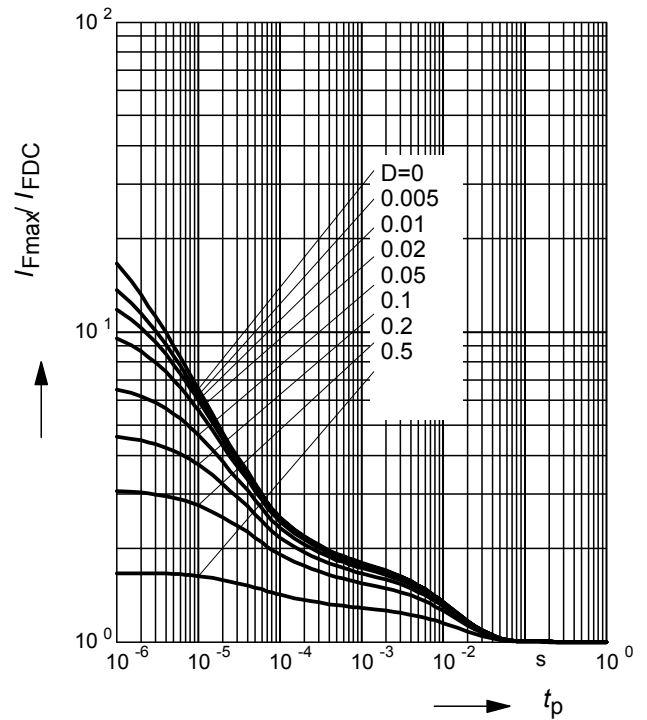

### Permissible Puls Load $R_{thJS} = f(t_p)$


BAS16S

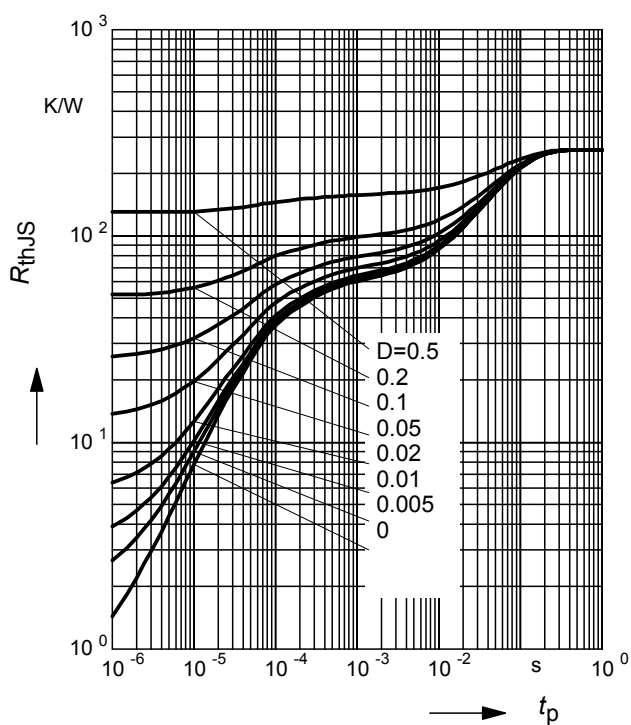

### Permissible Pulse Load


$$I_{Fmax}/I_{FDC} = f(t_p)$$

BAS16S

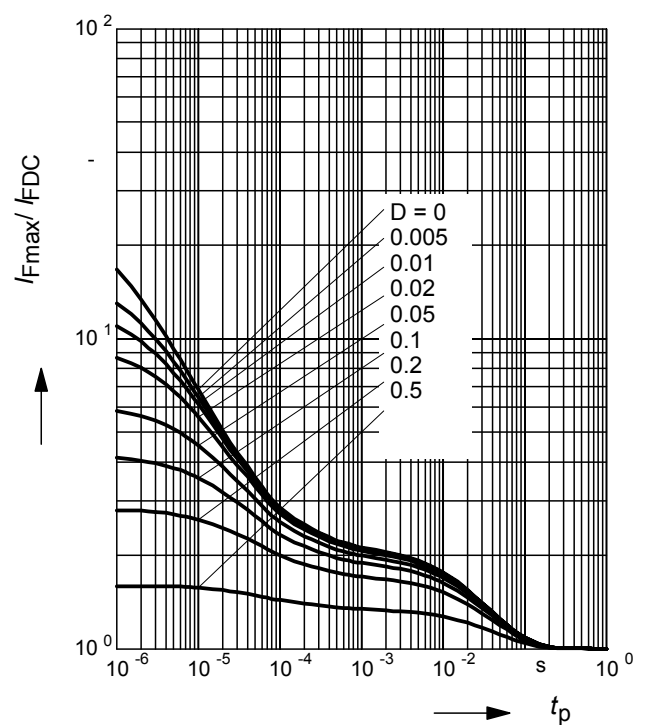

**Permissible Puls Load  $R_{thJS} = f(t_p)$**


**BAS16U**

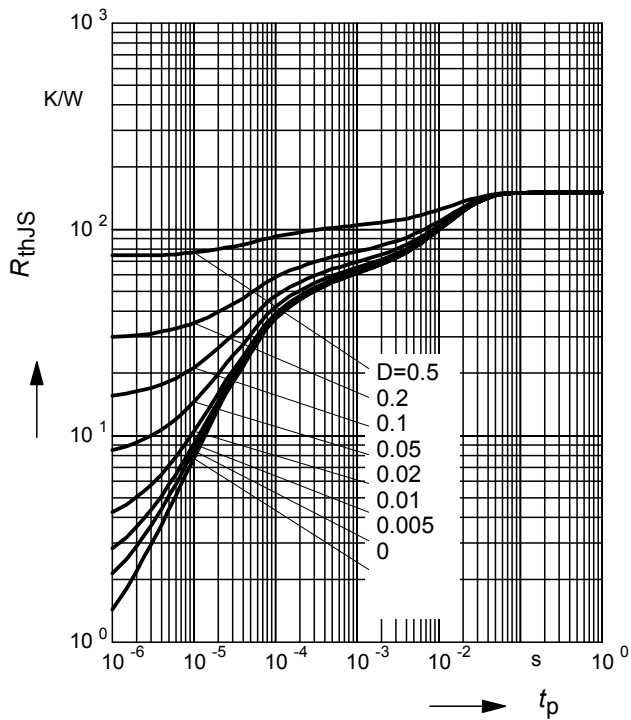

**Permissible Pulse Load**


$I_{Fmax}/I_{FDC} = f(t_p)$

**BAS16U**

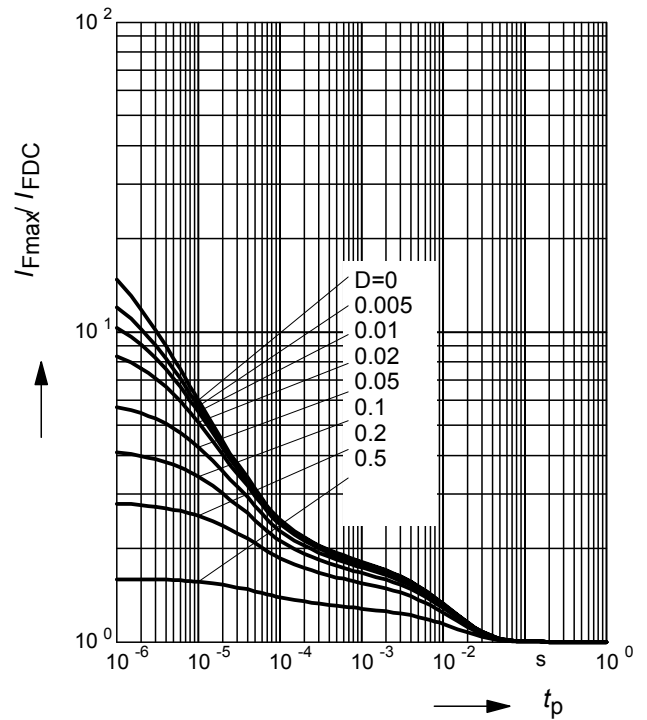

**Permissible Puls Load  $R_{thJS} = f(t_p)$**

**BAS16W**

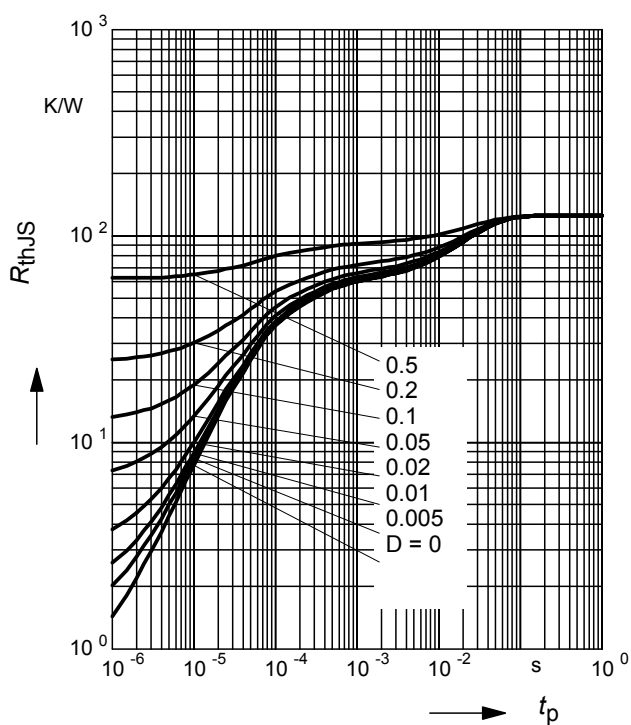

**Permissible Pulse Load**

$I_{Fmax}/I_{FDC} = f(t_p)$

**BAS16W**

