


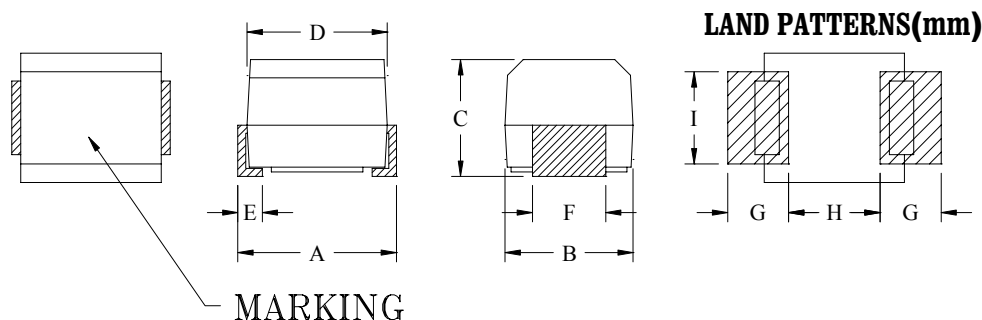

Part No.	A	B	C	D	E	F	G	H	I
JWI 252018	2.5 ± 0.20	2.0 ± 0.20	1.8 ± 0.20	2.2 ± 0.20	0.50	1.20	1.00	1.50	1.50

No.	Part No.	Inductance (μ H)	Q Min.	Test Frequency (MHz)	SRF Min. (MHz)	RDC Max. (Ω)	IDC Max. (mA)
1	JWI 252018-R22□	0.22	25	25.2	230	0.70	190
2	JWI 252018-R27□	0.27	25	25.2	210	0.75	180
3	JWI 252018-R33□	0.33	25	25.2	190	0.85	170
4	JWI 252018-R39□	0.39	25	25.2	175	0.95	160
5	JWI 252018-R47□	0.47	25	25.2	160	1.00	155
6	JWI 252018-R56□	0.56	25	25.2	150	1.10	150
7	JWI 252018-R68□	0.68	25	25.2	135	1.25	140
8	JWI 252018-R82□	0.82	25	25.2	125	1.40	130
9	JWI 252018-1R0□	1.00	25	7.96	115	0.65	195
10	JWI 252018-1R2□	1.20	25	7.96	100	0.75	180
11	JWI 252018-1R5□	1.50	25	7.96	90	0.85	170
12	JWI 252018-1R8□	1.80	25	7.96	85	0.95	160
13	JWI 252018-2R2□	2.20	25	7.96	80	1.05	155
14	JWI 252018-2R7□	2.70	25	7.96	75	1.20	145
15	JWI 252018-3R3□	3.30	25	7.96	65	1.30	135
16	JWI 252018-3R9□	3.90	25	7.96	60	1.40	130
17	JWI 252018-4R7□	4.70	25	7.96	55	1.55	125
18	JWI 252018-5R6□	5.60	25	7.96	50	1.75	120
19	JWI 252018-6R8□	6.80	25	7.96	45	1.95	115
20	JWI 252018-8R2□	8.20	25	7.96	40	2.20	105
21	JWI 252018-100□	10	25	2.52	32	3.50	80
22	JWI 252018-120□	12	25	2.52	30	3.80	75
23	JWI 252018-150□	15	25	2.52	28	4.40	70
24	JWI 252018-180□	18	25	2.52	25	5.00	65
25	JWI 252018-220□	22	25	2.52	22	5.80	60
26	JWI 252018-270□	27	20	2.52	21	6.30	115
27	JWI 252018-330□	33	20	2.52	20	7.10	110
28	JWI 252018-390□	39	20	2.52	18	9.50	90
29	JWI 252018-470□	47	20	2.52	17	11.0	80
30	JWI 252018-560□	56	20	2.52	16	12.1	75
31	JWI 252018-680□	68	20	2.52	15	16.6	70
32	JWI 252018-820□	82	20	2.52	13	19.0	65
33	JWI 252018-101□	100	15	0.796	12	21.0	60

Tolerance : J = ± 5% ; K = ± 10% ; M = ± 20% , K tolerance is standard.