

# CD40160B, CD40161B, CD40162B, CD40163B Types

## CMOS Synchronous Programmable 4-Bit Counters

High-Voltage Types (20-Volt Rating)

**CD40160B** – Decade with Asynchronous  
Clear

**CD40161B** – Binary with Asynchronous  
Clear

**CD40162B** – Decade with Synchronous  
Clear

**CD40163B** – Binary with Synchronous  
Clear

■ CD40160B, CD40161B, CD40162B, and CD40163B are 4-bit synchronous programmable counters. The CLEAR function of the CD40162B and CD40163B is synchronous and a low level at the CLEAR input sets all four outputs low on the next positive CLOCK edge. The CLEAR function of the CD40160B and CD40161B is asynchronous and a low level at the CLEAR input sets all four outputs low regardless of the state of the CLOCK, LOAD, or ENABLE inputs. A low level at the LOAD input disables the counter and causes the output to agree with the setup data after the next CLOCK pulse regardless of the conditions of the ENABLE inputs.

The carry look-ahead circuitry provides for cascading counters for n-bit synchronous applications without additional gating. Instrumental in accomplishing this function are two count-enable inputs and a carry output (C<sub>OUT</sub>). Counting is enabled when both PE and TE inputs are high. The TE input is fed forward to enable C<sub>OUT</sub>. This enabled output produces a positive output pulse with a


### Features:

- Internal look-ahead for fast counting
- Carry output for cascading
- Synchronously programmable
- Clear asynchronous input (CD40160B, CD40161B)
- Clear synchronous input (CD40162B, CD40163B)
- Synchronous load control input
- Low-power TTL compatibility
- Standardized, symmetrical output characteristics
- 100% tested for quiescent current at 20 V
- Maximum input current of 1  $\mu$ A at 18 V over full package-temperature range; 100 nA at 18 V and 25°C
- Noise margin (over full package-temperature range): 1 V at V<sub>DD</sub> = 5 V  
2 V at V<sub>DD</sub> = 10 V 2.5 V at V<sub>DD</sub> = 15 V
- 5-V, 10-V, and 15-V parametric ratings
- Meets all requirements of JEDEC Tentative Standard No. 13B, "Standard Specifications for Description of 'B' Series CMOS Devices"

duration approximately equal to the positive portion of the Q1 output. This positive overflow carry pulse can be used to enable successive cascaded stages. Logic transitions at the PE or TE inputs may occur when the clock is either high or low.

The CD40160B types are supplied in 16-lead hermetic dual-in-line ceramic packages (F3A suffix). The CD40161B types are supplied in 16-lead hermetic dual-in-line ceramic packages (F3A suffix), 16-lead dual-in-line plastic packages (E suffix), 16-lead small-outline packages (NSR suffix), and 16-lead thin shrink small-outline packages (PW and PWR suffixes).

The CD40160B through CD40163B types are functionally equivalent to and pin-compatible with the TTL counter series 74LS160 through 74LS163 respectively.

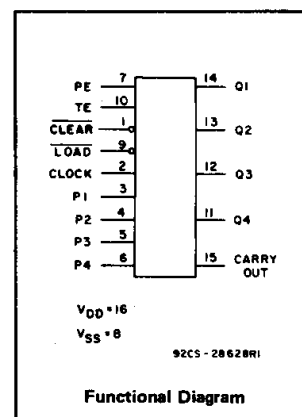

### Applications:

- Programmable binary and decade counting
- Counter control/timers
- Frequency dividing

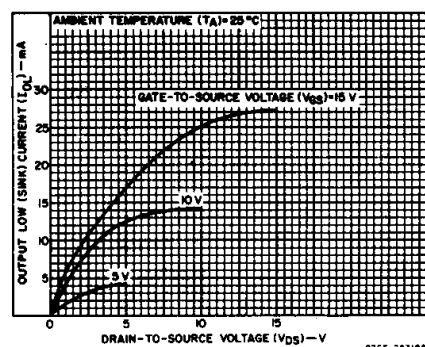


Fig. 1—Typical output low (sink) current characteristics.

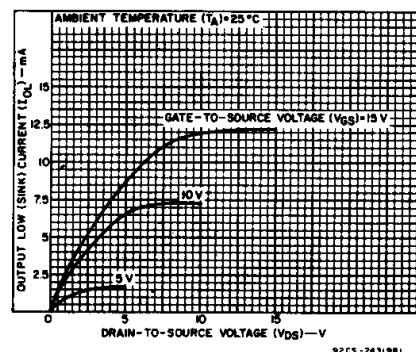


Fig. 2—Minimum output low (sink) current characteristics.

### MAXIMUM RATINGS, Absolute-Maximum Values:

#### DC SUPPLY-VOLTAGE RANGE, (V<sub>DD</sub>)

Voltages referenced to V<sub>SS</sub> Terminal) ..... -0.5V to +20V

INPUT VOLTAGE RANGE, ALL INPUTS ..... -0.5V to V<sub>DD</sub> +0.5V

DC INPUT CURRENT, ANY ONE INPUT .....  $\pm$ 10mA

#### POWER DISSIPATION PER PACKAGE (P<sub>D</sub>):

For T<sub>A</sub> = -55°C to +100°C ..... 500mW

For T<sub>A</sub> = +100°C to +125°C ..... Derate Linearly at 12mW/°C to 200mW

#### DEVICE DISSIPATION PER OUTPUT TRANSISTOR

FOR T<sub>A</sub> = FULL PACKAGE-TEMPERATURE RANGE (All Package Types) ..... 100mW

OPERATING-TEMPERATURE RANGE (T<sub>A</sub>) ..... -55°C to +125°C

STORAGE TEMPERATURE RANGE (T<sub>stg</sub>) ..... -65°C to +150°C

#### LEAD TEMPERATURE (DURING SOLDERING):

At distance 1/16  $\pm$  1/32 inch (1.59  $\pm$  0.79mm) from case for 10s max ..... +265°C

# **CD40160B, CD40161B, CD40162B, CD40163B Types**

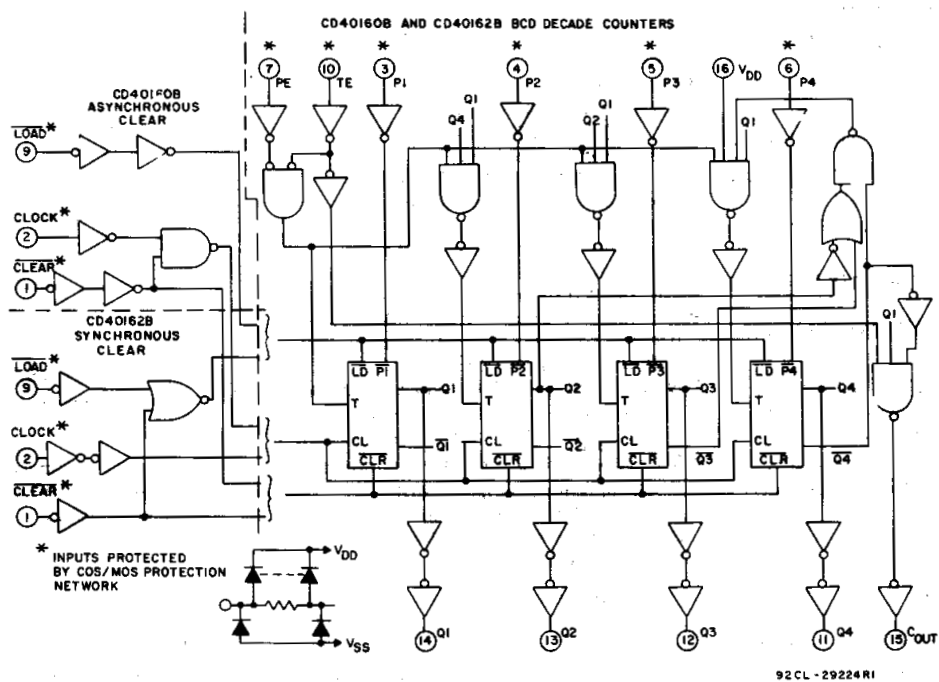


Fig. 3— Logic diagrams for CD40160B and CD40162B BCD decade counters.

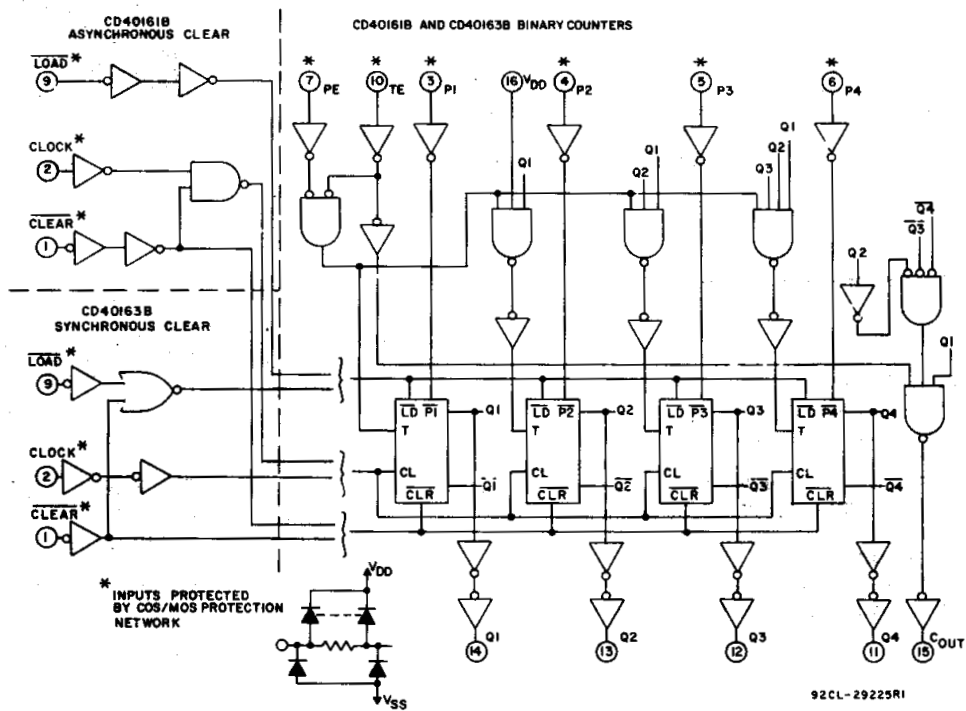


Fig. 4— Logic diagrams for CD40161B and CD40163B binary counters.

# CD40160B, CD40161B, CD40162B, CD40163B Types

**RECOMMENDED OPERATING CONDITIONS** at  $T_A = 25^\circ\text{C}$ , Except as Noted  
For maximum reliability, nominal operating conditions should be selected so that operation is always within the following ranges:

| CHARACTERISTIC                                                     | $V_{DD}$<br>(V) | LIMITS            |                 | UNITS         |
|--------------------------------------------------------------------|-----------------|-------------------|-----------------|---------------|
|                                                                    |                 | MIN.              | MAX.            |               |
| Supply Voltage Range (Full $T_A$ = Full Package-Temperature Range) | —               | 3                 | 18              | V             |
| Setup Time: $t_{SU}$<br>Data to Clock                              | 5<br>10<br>15   | 240<br>90<br>60   | —<br>—<br>—     | ns            |
| Load to Clock                                                      | 5<br>10<br>15   | 240<br>90<br>60   | —<br>—<br>—     | ns            |
| PE or TE to Clock                                                  | 5<br>10<br>15   | 340<br>140<br>100 | —<br>—<br>—     | ns            |
| Clear to Clock<br>(CD40162B, CD40163B)                             | 5<br>10<br>15   | 340<br>140<br>100 | —<br>—<br>—     | ns            |
| All Hold Times, $t_H$                                              | 5<br>10<br>15   | 0<br>0<br>0       | —<br>—<br>—     | ns            |
| Clear Removal Time, $t_{rem}$<br>(CD40160B, CD40161B)              | 5<br>10<br>15   | 200<br>100<br>70  | —<br>—<br>—     | ns            |
| Clear Pulse Width, $t_{WL}$<br>(CD40160B, CD40161B)                | 5<br>10<br>15   | 170<br>70<br>50   | —<br>—<br>—     | ns            |
| Clock Input Frequency, $f_{CL}$                                    | 5<br>10<br>15   | —<br>—<br>—       | 2<br>5.5<br>8   | MHz           |
| Clock Pulse Width, $t_W$                                           | 5<br>10<br>15   | 170<br>70<br>50   | —<br>—<br>—     | ns            |
| Clock Rise or Fall Time, $t_{rCL}$ or $t_{fCL}$                    | 5<br>10<br>15   | —<br>—<br>—       | 200<br>70<br>15 | $\mu\text{s}$ |

**TRUTH TABLE**

| CLOCK | CLR | LOAD | PE | TE | OPERATION                  |
|-------|-----|------|----|----|----------------------------|
|       | 1   | 0    | X  | X  | PRESET                     |
|       | 1   | 1    | 0  | X  | NC                         |
|       | 1   | 1    | X  | 0  | NC                         |
|       | 1   | 1    | 1  | 1  | COUNT                      |
| X     | 0   | X    | X  | X  | RESET (CD40160B, CD40161B) |
|       | 0   | X    | X  | X  | RESET (CD40162B, CD40163B) |
|       | 1   | X    | X  | X  | NC (CD40162B, CD40163B)    |

1 = HIGH LEVEL    0 = LOW LEVEL    X = DON'T CARE    NC = NO CHANGE

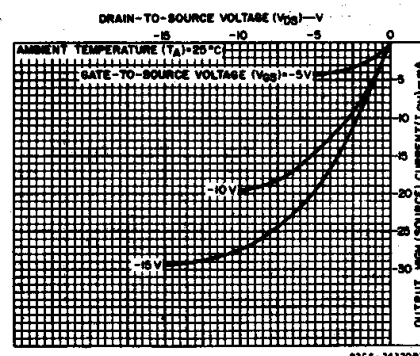


Fig. 5— Typical output high (source) current characteristics.

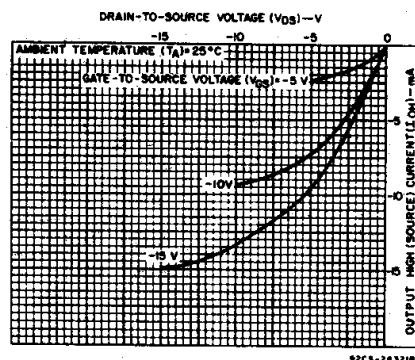


Fig. 6— Minimum output high (source) current characteristics.

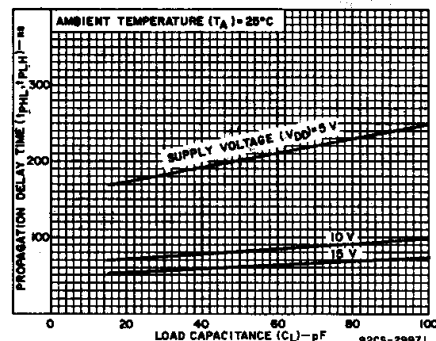


Fig. 7— Typical propagation delay time as a function of load capacitance (CLOCK to Q).

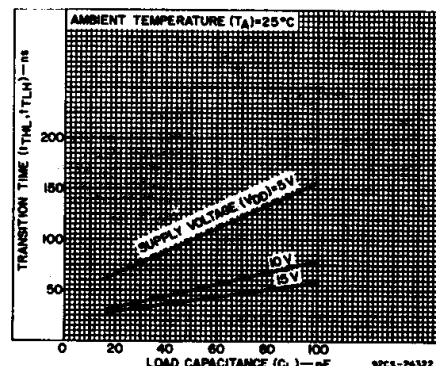


Fig. 8— Typical transition time as a function of load capacitance.

# CD40160B, CD40161B, CD40162B, CD40163B Types

## STATIC ELECTRICAL CHARACTERISTICS

| CHARACTERISTIC                                     | CONDITIONS            |                        |                        | LIMITS AT INDICATED TEMPERATURES (°C) |       |       |       |       |                   |      | UNITS |
|----------------------------------------------------|-----------------------|------------------------|------------------------|---------------------------------------|-------|-------|-------|-------|-------------------|------|-------|
|                                                    | V <sub>O</sub><br>(V) | V <sub>IN</sub><br>(V) | V <sub>DD</sub><br>(V) | -55                                   | -40   | +85   | +125  | +25   |                   |      |       |
|                                                    |                       |                        |                        |                                       |       |       |       | Min.  | Typ.              | Max. |       |
| Quiescent Device Current, I <sub>DD</sub> Max.     | —                     | 0,5                    | 5                      | 5                                     | 5     | 150   | 150   | —     | 0.04              | 5    | μA    |
|                                                    | —                     | 0,10                   | 10                     | 10                                    | 10    | 300   | 300   | —     | 0.04              | 10   |       |
|                                                    | —                     | 0,15                   | 15                     | 20                                    | 20    | 600   | 600   | —     | 0.04              | 20   |       |
|                                                    | —                     | 0,20                   | 20                     | 100                                   | 100   | 3000  | 3000  | —     | 0.08              | 100  |       |
| Output Low (Sink) Current I <sub>OL</sub> Min.     | 0.4                   | 0,5                    | 5                      | 0.64                                  | 0.61  | 0.42  | 0.36  | 0.51  | 1                 | —    | mA    |
|                                                    | 0.5                   | 0,10                   | 10                     | 1.6                                   | 1.5   | 1.1   | 0.9   | 1.3   | 2.6               | —    |       |
|                                                    | 1.5                   | 0,15                   | 15                     | 4.2                                   | 4     | 2.8   | 2.4   | 3.4   | 6.8               | —    |       |
| Output High (Source) Current, I <sub>OH</sub> Min. | 4.6                   | 0,5                    | 5                      | -0.64                                 | -0.61 | -0.42 | -0.36 | -0.51 | -1                | —    | mA    |
|                                                    | 2.5                   | 0,5                    | 5                      | -2                                    | -1.8  | -1.3  | -1.15 | -1.6  | -3.2              | —    |       |
|                                                    | 9.5                   | 0,10                   | 10                     | -1.6                                  | -1.5  | -1.1  | -0.9  | -1.3  | -2.6              | —    |       |
|                                                    | 13.5                  | 0,15                   | 15                     | -4.2                                  | -4    | -2.8  | -2.4  | -3.4  | -6.8              | —    |       |
| Output Voltage: Low-Level, V <sub>OL</sub> Max.    | —                     | 0,5                    | 5                      | 0.05                                  |       |       |       | —     | 0                 | 0.05 | V     |
|                                                    | —                     | 0,10                   | 10                     | 0.05                                  |       |       |       | —     | 0                 | 0.05 |       |
|                                                    | —                     | 0,15                   | 15                     | 0.05                                  |       |       |       | —     | 0                 | 0.05 |       |
| Output Voltage: High-Level, V <sub>OH</sub> Min.   | —                     | 0,5                    | 5                      | 4.95                                  |       |       |       | 4.95  | 5                 | —    | V     |
|                                                    | —                     | 0,10                   | 10                     | 9.95                                  |       |       |       | 9.95  | 10                | —    |       |
|                                                    | —                     | 0,15                   | 15                     | 14.95                                 |       |       |       | 14.95 | 15                | —    |       |
| Input Low Voltage V <sub>IL</sub> Max.             | 0.5,4.5               | —                      | 5                      | 1.5                                   |       |       |       | —     | —                 | 1.5  | V     |
|                                                    | 1,9                   | —                      | 10                     | 3                                     |       |       |       | —     | —                 | 3    |       |
|                                                    | 1.5,13.5              | —                      | 15                     | 4                                     |       |       |       | —     | —                 | 4    |       |
| Input High Voltage, V <sub>IH</sub> Min.           | 0.5,4.5               | —                      | 5                      | 3.5                                   |       |       |       | 3.5   | —                 | —    | V     |
|                                                    | 1,9                   | —                      | 10                     | 7                                     |       |       |       | 7     | —                 | —    |       |
|                                                    | 1.5,13.5              | —                      | 15                     | 11                                    |       |       |       | 11    | —                 | —    |       |
| Input Current I <sub>IN</sub> Max.                 | —                     | 0,18                   | 18                     | ±0.1                                  | ±0.1  | ±1    | ±1    | —     | ±10 <sup>-5</sup> | ±0.1 | μA    |

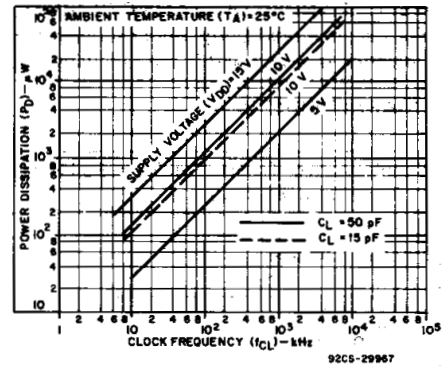


Fig. 9— Typical power dissipation as a function of CLOCK frequency.




Fig. 10— Dynamic power dissipation test circuit.




Fig. 11— Quiescent-device-current test circuit.

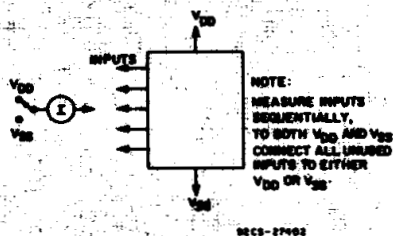


Fig. 12— Input-current test circuit.

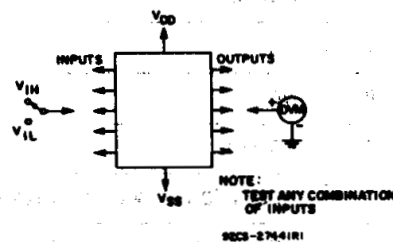


Fig. 13— Input-voltage test circuit.

## TERMINAL ASSIGNMENT

|                 |   |    |                 |
|-----------------|---|----|-----------------|
| CLEAR           | 1 | 16 | V <sub>DD</sub> |
| CLOCK           | 2 | 15 | CARRY OUT       |
| P1              | 3 | 14 | Q1              |
| P2              | 4 | 13 | Q2              |
| P3              | 5 | 12 | Q3              |
| P4              | 6 | 11 | Q4              |
| PE              | 7 | 10 | TE              |
| V <sub>SS</sub> | 8 | 9  | LOAD            |

92CS-29459

# CD40160B, CD40161B, CD40162B, CD40163B Types


DYNAMIC ELECTRICAL CHARACTERISTICS at  $T_A = 25^\circ\text{C}$ ;  
Input  $t_r, t_f = 20 \text{ ns}$ ,  $C_L = 50 \text{ pF}$ ,  $R_L = 200 \text{ k}\Omega$

| CHARACTERISTIC                                                                 | TEST CONDITIONS<br>V <sub>DD</sub> (V) | LIMITS<br>ALL TYPES* |      |      | UNITS |
|--------------------------------------------------------------------------------|----------------------------------------|----------------------|------|------|-------|
|                                                                                |                                        | Min.                 | Typ. | Max. |       |
| CLOCK OPERATION                                                                |                                        |                      |      |      |       |
| Propagation Delay Time, t <sub>PHL</sub> , t <sub>PLH</sub><br>Clock to Q      | 5                                      | —                    | 200  | 400  | ns    |
|                                                                                | 10                                     | —                    | 80   | 160  |       |
|                                                                                | 15                                     | —                    | 60   | 120  |       |
| Clock to C <sub>OUT</sub>                                                      | 5                                      | —                    | 225  | 450  | ns    |
|                                                                                | 10                                     | —                    | 95   | 190  |       |
|                                                                                | 15                                     | —                    | 70   | 140  |       |
| TE to C <sub>OUT</sub>                                                         | 5                                      | —                    | 125  | 250  | ns    |
|                                                                                | 10                                     | —                    | 55   | 110  |       |
|                                                                                | 15                                     | —                    | 40   | 80   |       |
| Minimum Setup Time, t <sub>SU</sub><br>Data to Clock                           | 5                                      | —                    | 120  | 240  | ns    |
|                                                                                | 10                                     | —                    | 45   | 90   |       |
|                                                                                | 15                                     | —                    | 30   | 60   |       |
| Load to Clock                                                                  | 5                                      | —                    | 120  | 240  | ns    |
|                                                                                | 10                                     | —                    | 45   | 90   |       |
|                                                                                | 15                                     | —                    | 30   | 60   |       |
| PE to TE to Clock                                                              | 5                                      | —                    | 170  | 340  | ns    |
|                                                                                | 10                                     | —                    | 70   | 140  |       |
|                                                                                | 15                                     | —                    | 50   | 100  |       |
| Minimum Hold Time, t <sub>H</sub>                                              | 5                                      | —                    | —    | 0    | ns    |
|                                                                                | 10                                     | —                    | —    | 0    |       |
|                                                                                | 15                                     | —                    | —    | 0    |       |
| Transition Time, t <sub>THL</sub> , t <sub>TLH</sub>                           | 5                                      | —                    | 100  | 200  | ns    |
|                                                                                | 10                                     | —                    | 50   | 100  |       |
|                                                                                | 15                                     | —                    | 40   | 80   |       |
| Minimum Clock Pulse Width, t <sub>W</sub>                                      | 5                                      | —                    | 85   | 170  | ns    |
|                                                                                | 10                                     | —                    | 35   | 70   |       |
|                                                                                | 15                                     | —                    | 25   | 50   |       |
| Maximum Clock Frequency, f <sub>CL</sub>                                       | 5                                      | 2                    | 3    | —    | MHz   |
|                                                                                | 10                                     | 5.5                  | 8.5  | —    |       |
|                                                                                | 15                                     | 8                    | 12   | —    |       |
| Maximum Clock Rise or Fall Time, †<br>t <sub>rCL</sub> , t <sub>fCL</sub>      | 5                                      | 200                  | —    | —    | μs    |
|                                                                                | 10                                     | 70                   | —    | —    |       |
|                                                                                | 15                                     | 15                   | —    | —    |       |
| CLEAR OPERATION                                                                |                                        |                      |      |      |       |
| Propagation Delay Time, t <sub>PHL</sub><br>(CD40160B, CD40161B)<br>Clear to Q | 5                                      | —                    | 250  | 500  | ns    |
|                                                                                | 10                                     | —                    | 110  | 220  |       |
|                                                                                | 15                                     | —                    | 80   | 160  |       |
| Minimum Setup Time, t <sub>SU</sub><br>(CD40162B, CD40163B)<br>Clear to Clock  | 5                                      | —                    | 170  | 340  | ns    |
|                                                                                | 10                                     | —                    | 70   | 140  |       |
|                                                                                | 15                                     | —                    | 50   | 100  |       |
| Minimum Hold Time, t <sub>H</sub><br>(CD40162B, CD40163B)<br>Clear to Clock    | 5                                      | —                    | —    | 0    | ns    |
|                                                                                | 10                                     | —                    | —    | 0    |       |
|                                                                                | 15                                     | —                    | —    | 0    |       |
| Minimum Clear Removal Time, t <sub>rem</sub><br>(CD40160B, CD40161B)           | 5                                      | —                    | 100  | 200  | ns    |
|                                                                                | 10                                     | —                    | 50   | 100  |       |
|                                                                                | 15                                     | —                    | 35   | 70   |       |
| Minimum Clear Pulse Width, t <sub>WL</sub><br>(CD40160B, CD40161B)             | 5                                      | —                    | 85   | 170  | ns    |
|                                                                                | 10                                     | —                    | 35   | 70   |       |
|                                                                                | 15                                     | —                    | 25   | 50   |       |


\* Except as noted.

† If more than one unit is cascaded in the parallel clocked application,  $t_{rCL}$  should be made less than or equal to the sum of the fixed propagation delay at 50 pF and the transition time of the carry output driving stage for the estimated capacitive load.

**CD40160B, CD40161B, CD40162B, CD40163B Types**

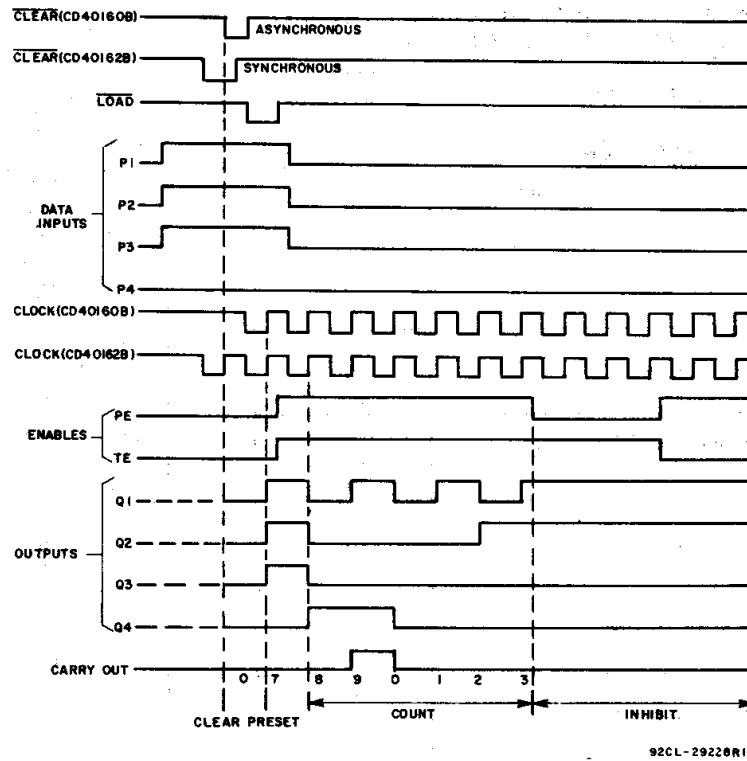

**Fig. 14— Timing diagram for CD40160B, CD40162B.**

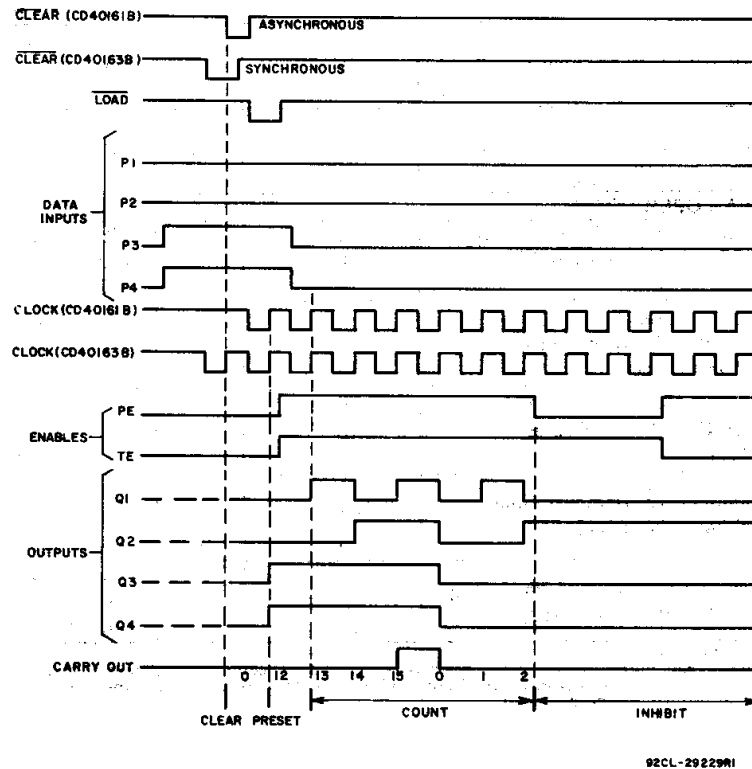

**Fig. 15— Timing diagram for CD40161B, CD40163B.**

# **CD40160B, CD40161B, CD40162B, CD40163B Types**

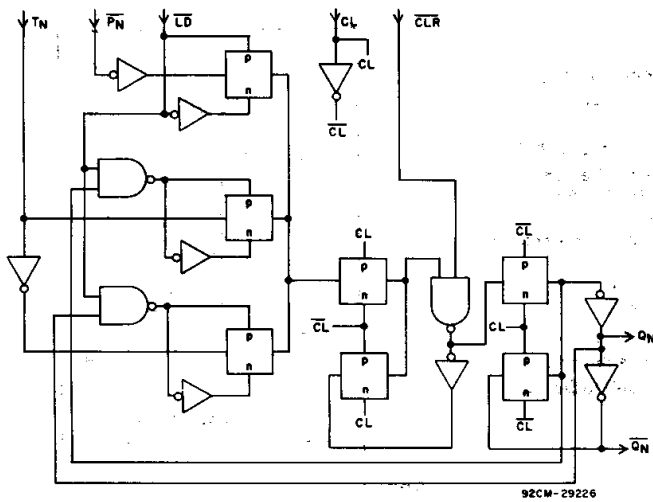


Fig. 16— Detail of flip-flops of CD40160B and CD40161B (asynchronous clear).


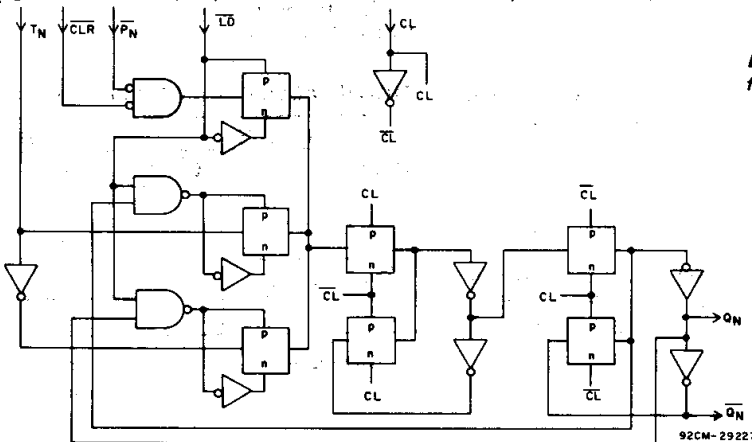


Fig. 17— Detail of flip-flops for CD40162B and CD40163B (synchronous clear).

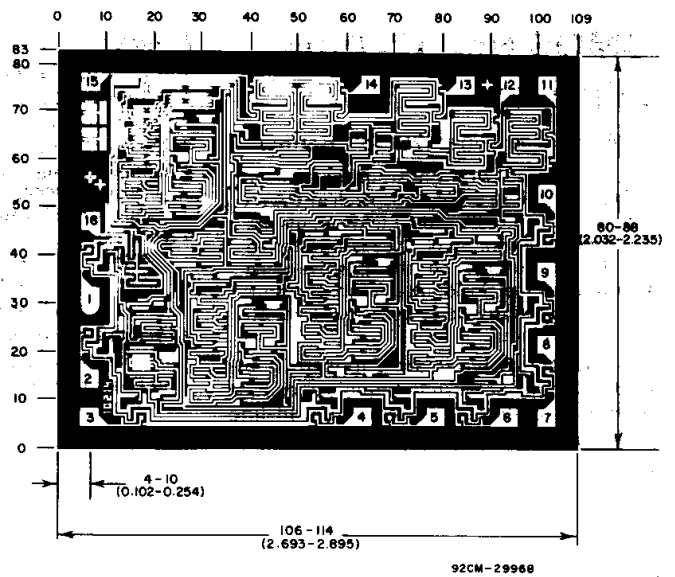

Dimensions and pad layout for CD40160BH. Dimensions and pad layout for CD40161BH, CD40162BH, and CD40163BH are identical.

Dimensions in parentheses are in millimeters and are derived from the basic inch dimensions as indicated. Grid graduations are in mils ( $10^{-3}$  inch).

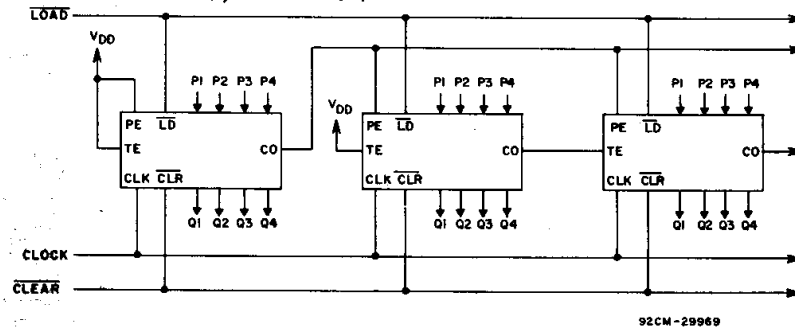


Fig. 18 — Cascaded counter packages in the parallel-clocked mode.

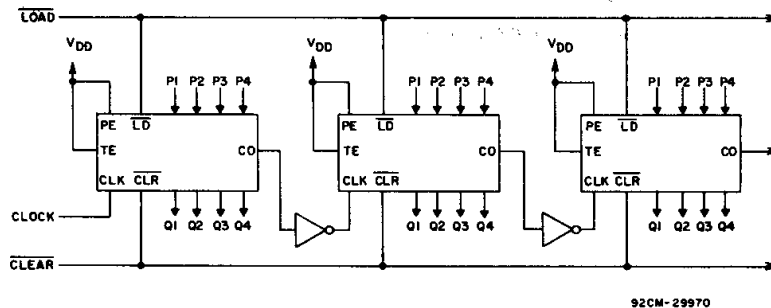


Fig. 19 — Cascaded counter packages in the ripple-clocked mode.

3  
COMMERCIAL CMOS  
HIGH VOLTAGE ICs

**PACKAGING INFORMATION**

| Orderable Device | Status <sup>(1)</sup> | Package Type | Package Drawing | Pins | Package Qty | Eco Plan <sup>(2)</sup> | Lead/Ball Finish | MSL Peak Temp <sup>(3)</sup> |
|------------------|-----------------------|--------------|-----------------|------|-------------|-------------------------|------------------|------------------------------|
| CD40160BF3A      | ACTIVE                | CDIP         | J               | 16   | 1           | TBD                     | A42              | N / A for Pkg Type           |
| CD40161BE        | ACTIVE                | PDIP         | N               | 16   | 25          | Pb-Free (RoHS)          | CU NIPDAU        | N / A for Pkg Type           |
| CD40161BEE4      | ACTIVE                | PDIP         | N               | 16   | 25          | Pb-Free (RoHS)          | CU NIPDAU        | N / A for Pkg Type           |
| CD40161BF3A      | ACTIVE                | CDIP         | J               | 16   | 1           | TBD                     | A42              | N / A for Pkg Type           |
| CD40161BNSR      | ACTIVE                | SO           | NS              | 16   | 2000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| CD40161BNSRE4    | ACTIVE                | SO           | NS              | 16   | 2000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| CD40161BNSRG4    | ACTIVE                | SO           | NS              | 16   | 2000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| CD40161BPWR      | ACTIVE                | TSSOP        | PW              | 16   | 2000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| CD40161BPWRE4    | ACTIVE                | TSSOP        | PW              | 16   | 2000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| CD40161BPWRG4    | ACTIVE                | TSSOP        | PW              | 16   | 2000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |

<sup>(1)</sup> The marketing status values are defined as follows:

**ACTIVE:** Product device recommended for new designs.

**LIFEBUY:** TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

**NRND:** Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

**PREVIEW:** Device has been announced but is not in production. Samples may or may not be available.

**OBSOLETE:** TI has discontinued the production of the device.

<sup>(2)</sup> Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check <http://www.ti.com/productcontent> for the latest availability information and additional product content details.

**TBD:** The Pb-Free/Green conversion plan has not been defined.

**Pb-Free (RoHS):** TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.

**Pb-Free (RoHS Exempt):** This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.



**Green (RoHS & no Sb/Br):** TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

<sup>(3)</sup> MSL, Peak Temp. -- The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

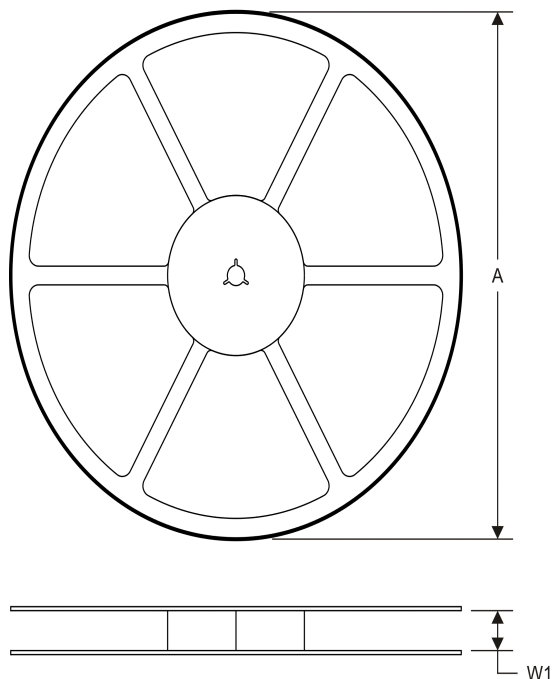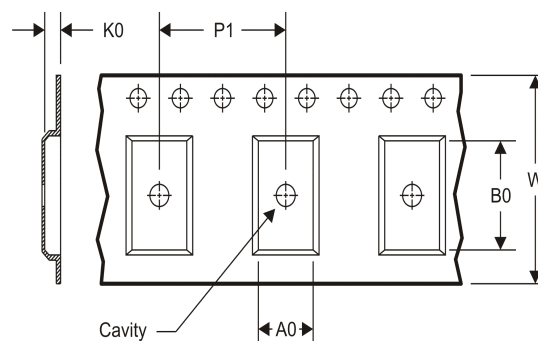

**TAPE AND REEL INFORMATION**
**REEL DIMENSIONS**

**TAPE DIMENSIONS**


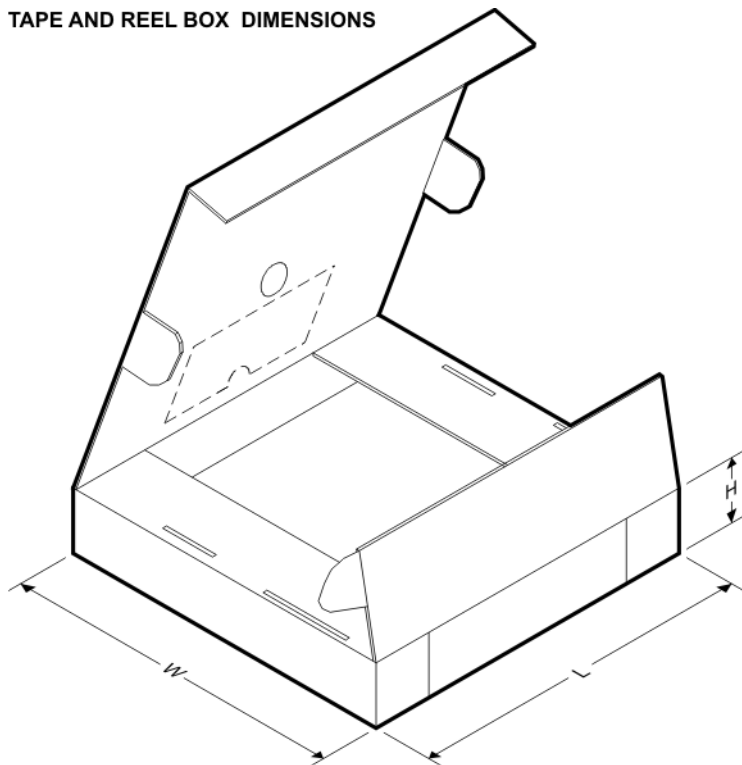
|    |                                                           |
|----|-----------------------------------------------------------|
| A0 | Dimension designed to accommodate the component width     |
| B0 | Dimension designed to accommodate the component length    |
| K0 | Dimension designed to accommodate the component thickness |
| W  | Overall width of the carrier tape                         |
| P1 | Pitch between successive cavity centers                   |

**TAPE AND REEL INFORMATION**

\*All dimensions are nominal

| Device      | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|-------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| CD40161BNSR | SO           | NS              | 16   | 2000 | 330.0              | 16.4               | 8.2     | 10.5    | 2.5     | 12.0    | 16.0   | Q1            |
| CD40161BPWR | TSSOP        | PW              | 16   | 2000 | 330.0              | 12.4               | 6.9     | 5.6     | 1.6     | 8.0     | 12.0   | Q1            |

## TAPE AND REEL BOX DIMENSIONS




\*All dimensions are nominal

| Device      | Package Type | Package Drawing | Pins | SPQ  | Length (mm) | Width (mm) | Height (mm) |
|-------------|--------------|-----------------|------|------|-------------|------------|-------------|
| CD40161BNSR | SO           | NS              | 16   | 2000 | 367.0       | 367.0      | 38.0        |
| CD40161BPWR | TSSOP        | PW              | 16   | 2000 | 367.0       | 367.0      | 35.0        |


J (R-GDIP-T\*\*)

14 LEADS SHOWN

# CERAMIC DUAL IN-LINE PACKAGE

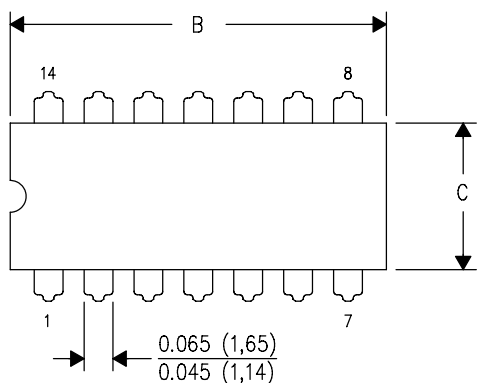

| PINS **<br>DIM | 14                     | 16                     | 18                     | 20                     |
|----------------|------------------------|------------------------|------------------------|------------------------|
| A              | 0.300<br>(7,62)<br>BSC | 0.300<br>(7,62)<br>BSC | 0.300<br>(7,62)<br>BSC | 0.300<br>(7,62)<br>BSC |
| B MAX          | 0.785<br>(19,94)       | .840<br>(21,34)        | 0.960<br>(24,38)       | 1.060<br>(26,92)       |
| B MIN          | —                      | —                      | —                      | —                      |
| C MAX          | 0.300<br>(7,62)        | 0.300<br>(7,62)        | 0.310<br>(7,87)        | 0.300<br>(7,62)        |
| C MIN          | 0.245<br>(6,22)        | 0.245<br>(6,22)        | 0.220<br>(5,59)        | 0.245<br>(6,22)        |

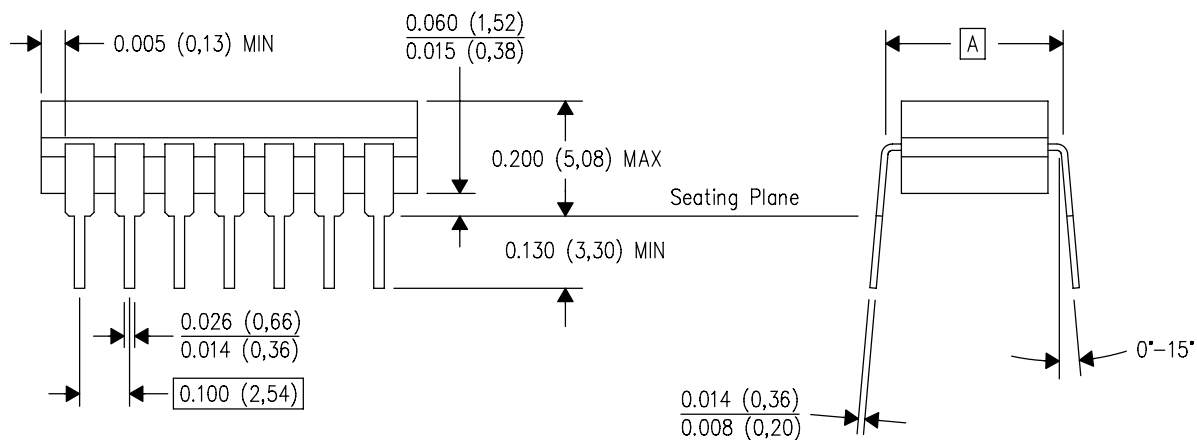


4040083/F 03/03

- NOTES:
- A. All linear dimensions are in inches (millimeters).
  - B. This drawing is subject to change without notice.
  - C. This package is hermetically sealed with a ceramic lid using glass frit.
  - D. Index point is provided on cap for terminal identification only on press ceramic glass frit seal only.
  - E. Falls within MIL STD 1835 GDIP1-T14, GDIP1-T16, GDIP1-T18 and GDIP1-T20.


## N (R-PDIP-T\*\*)

16 PINS SHOWN

## PLASTIC DUAL-IN-LINE PACKAGE

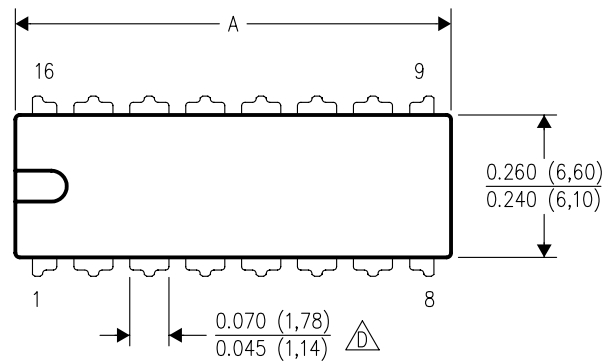

| PINS **             | 14               | 16               | 18               | 20               |
|---------------------|------------------|------------------|------------------|------------------|
| DIM                 |                  |                  |                  |                  |
| A MAX               | 0.775<br>(19,69) | 0.775<br>(19,69) | 0.920<br>(23,37) | 1.060<br>(26,92) |
| A MIN               | 0.745<br>(18,92) | 0.745<br>(18,92) | 0.850<br>(21,59) | 0.940<br>(23,88) |
| MS-001<br>VARIATION | AA               | BB               | AC               | AD               |

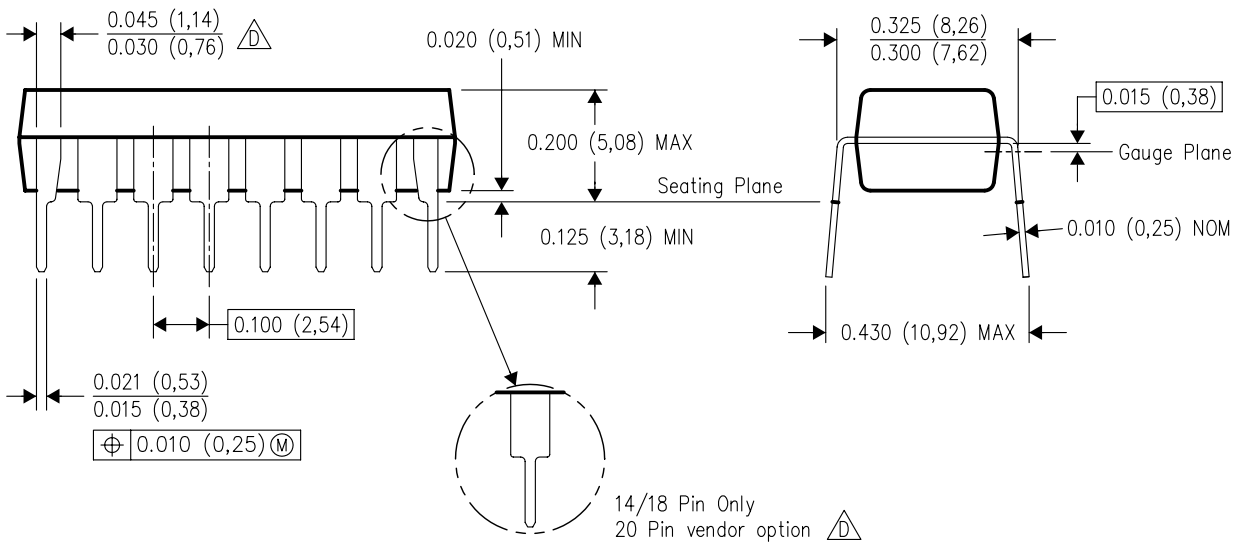


14/18 Pin Only  
20 Pin vendor option

4040049/E 12/2002

- NOTES:
- A. All linear dimensions are in inches (millimeters).
  - B. This drawing is subject to change without notice.
  - Falls within JEDEC MS-001, except 18 and 20 pin minimum body length (Dim A).
  - The 20 pin end lead shoulder width is a vendor option, either half or full width.

PW (R-PDSO-G16)

PLASTIC SMALL OUTLINE

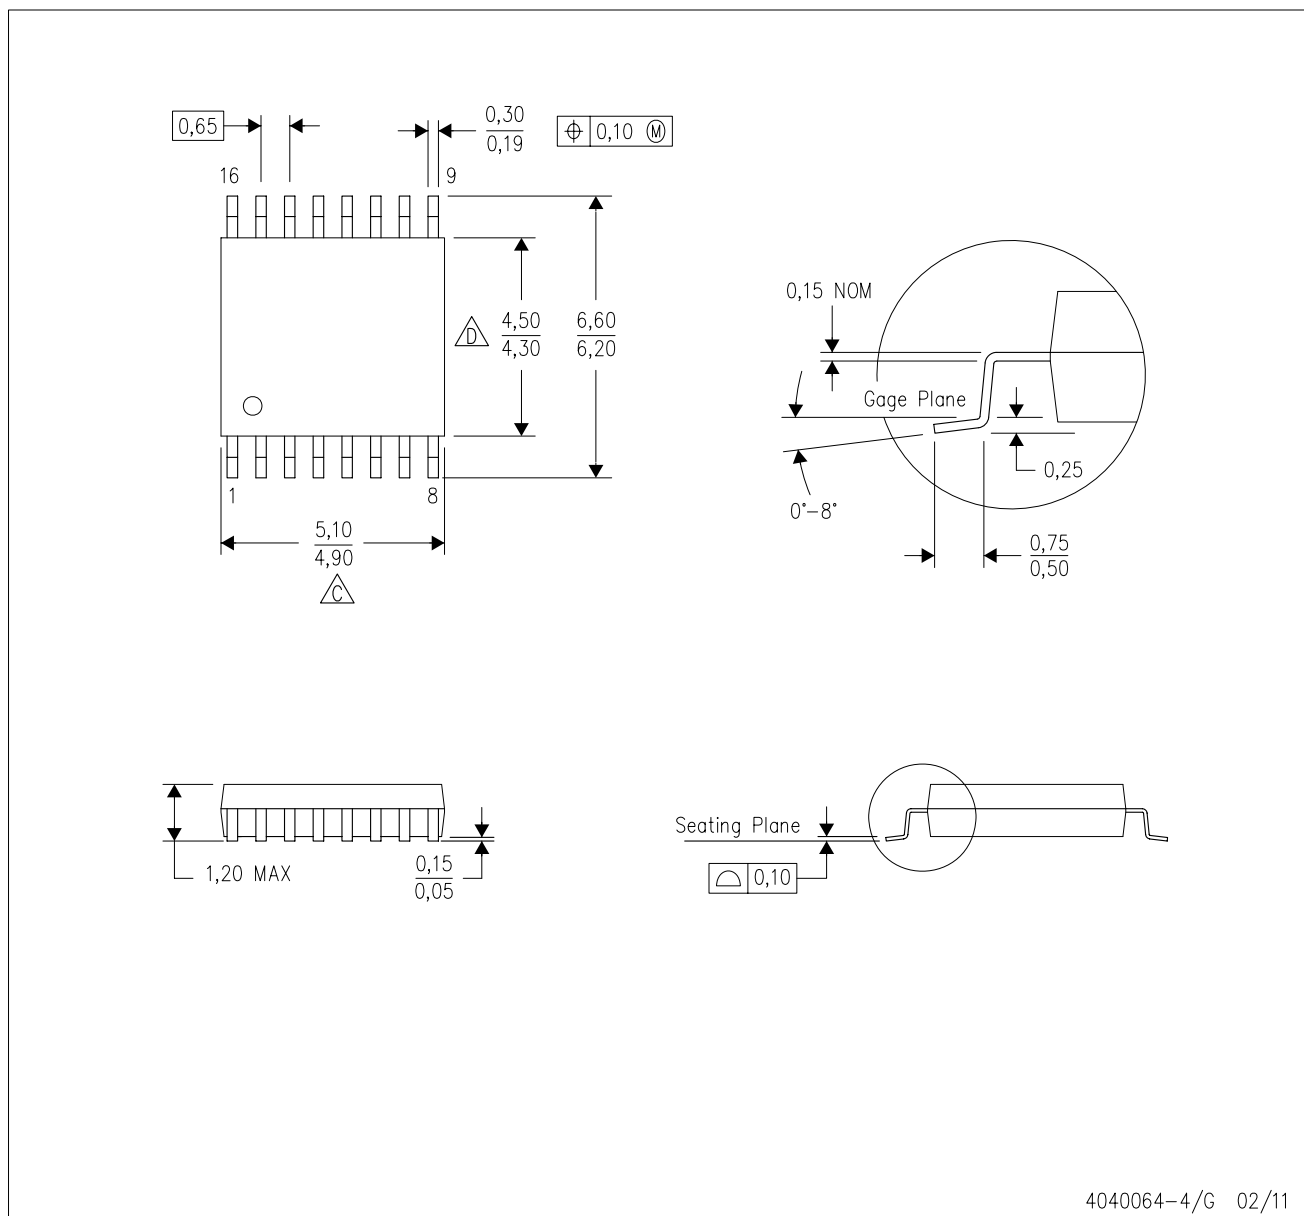


4040064-4/G 02/11

- NOTES:
- A. All linear dimensions are in millimeters. Dimensioning and tolerancing per ASME Y14.5M-1994.
  - B. This drawing is subject to change without notice.
  - C. Body length does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0,15 each side.
  - D. Body width does not include interlead flash. Interlead flash shall not exceed 0,25 each side.
  - E. Falls within JEDEC MO-153

PW (R-PDSO-G16)

PLASTIC SMALL OUTLINE

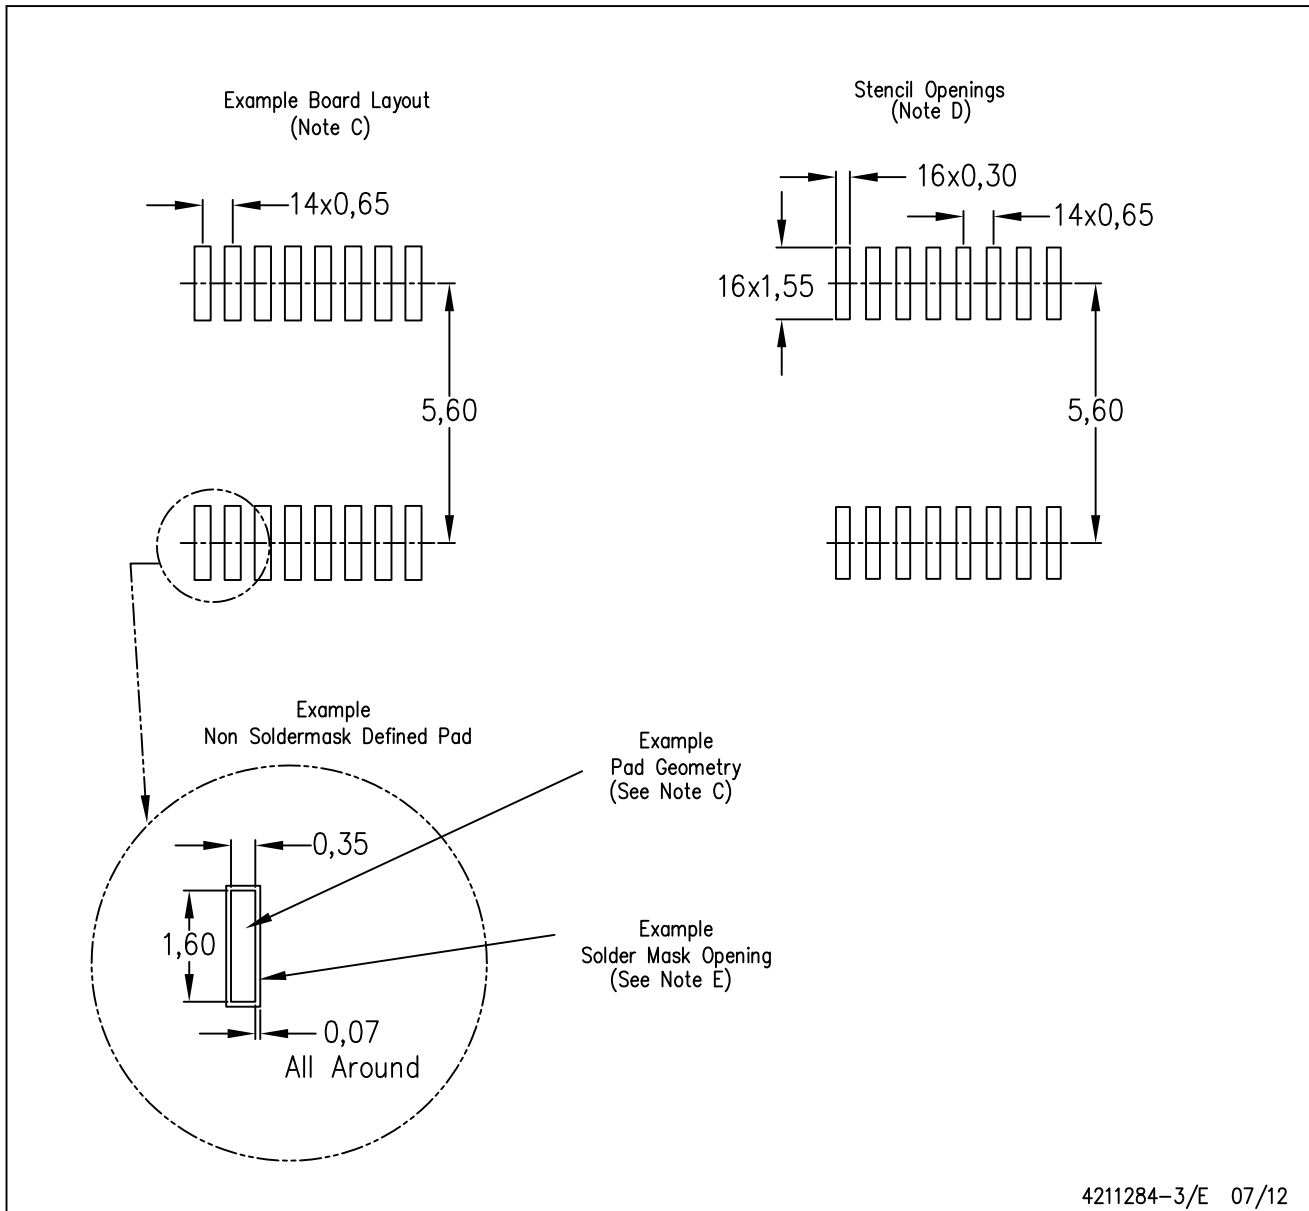


- NOTES:
- A. All linear dimensions are in millimeters.
  - B. This drawing is subject to change without notice.
  - C. Publication IPC-7351 is recommended for alternate designs.
  - D. Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Refer to IPC-7525 for other stencil recommendations.
  - E. Customers should contact their board fabrication site for solder mask tolerances between and around signal pads.

# MECHANICAL DATA

NS (R-PDSO-G\*\*)

PLASTIC SMALL-OUTLINE PACKAGE

14-PINS SHOWN

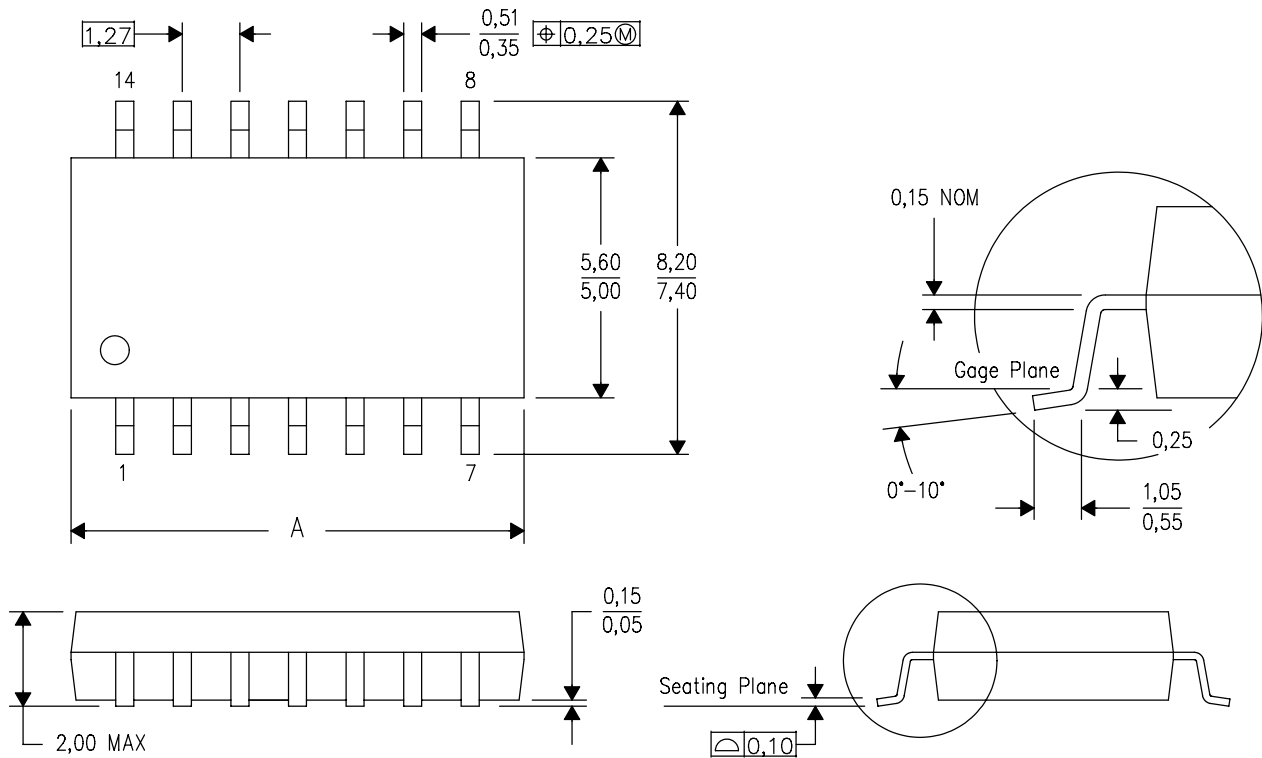

| DIM \ PINS ** | 14    | 16    | 20    | 24    |
|---------------|-------|-------|-------|-------|
| A MAX         | 10,50 | 10,50 | 12,90 | 15,30 |
| A MIN         | 9,90  | 9,90  | 12,30 | 14,70 |

4040062/C 03/03

- NOTES:
- A. All linear dimensions are in millimeters.
  - B. This drawing is subject to change without notice.
  - C. Body dimensions do not include mold flash or protrusion, not to exceed 0,15.

## IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, enhancements, improvements and other changes to its semiconductor products and services per JESD46C and to discontinue any product or service per JESD48B. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All semiconductor products (also referred to herein as "components") are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its components to the specifications applicable at the time of sale, in accordance with the warranty in TI's terms and conditions of sale of semiconductor products. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by applicable law, testing of all parameters of each component is not necessarily performed.

TI assumes no liability for applications assistance or the design of Buyers' products. Buyers are responsible for their products and applications using TI components. To minimize the risks associated with Buyers' products and applications, Buyers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI components or services are used. Information published by TI regarding third-party products or services does not constitute a license to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of significant portions of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI components or services with statements different from or beyond the parameters stated by TI for that component or service voids all express and any implied warranties for the associated TI component or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Buyer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of TI components in its applications, notwithstanding any applications-related information or support that may be provided by TI. Buyer represents and agrees that it has all the necessary expertise to create and implement safeguards which anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm and take appropriate remedial actions. Buyer will fully indemnify TI and its representatives against any damages arising out of the use of any TI components in safety-critical applications.

In some cases, TI components may be promoted specifically to facilitate safety-related applications. With such components, TI's goal is to help enable customers to design and create their own end-product solutions that meet applicable functional safety standards and requirements. Nonetheless, such components are subject to these terms.

No TI components are authorized for use in FDA Class III (or similar life-critical medical equipment) unless authorized officers of the parties have executed a special agreement specifically governing such use.

Only those TI components which TI has specifically designated as military grade or "enhanced plastic" are designed and intended for use in military/aerospace applications or environments. Buyer acknowledges and agrees that any military or aerospace use of TI components which have **not** been so designated is solely at the Buyer's risk, and that Buyer is solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI has specifically designated certain components which meet ISO/TS16949 requirements, mainly for automotive use. Components which have not been so designated are neither designed nor intended for automotive use; and TI will not be responsible for any failure of such components to meet such requirements.

### Products

|                        |                                                                                      |
|------------------------|--------------------------------------------------------------------------------------|
| Audio                  | <a href="http://www.ti.com/audio">www.ti.com/audio</a>                               |
| Amplifiers             | <a href="http://amplifier.ti.com">amplifier.ti.com</a>                               |
| Data Converters        | <a href="http://dataconverter.ti.com">dataconverter.ti.com</a>                       |
| DLP® Products          | <a href="http://www.dlp.com">www.dlp.com</a>                                         |
| DSP                    | <a href="http://dsp.ti.com">dsp.ti.com</a>                                           |
| Clocks and Timers      | <a href="http://www.ti.com/clocks">www.ti.com/clocks</a>                             |
| Interface              | <a href="http://interface.ti.com">interface.ti.com</a>                               |
| Logic                  | <a href="http://logic.ti.com">logic.ti.com</a>                                       |
| Power Mgmt             | <a href="http://power.ti.com">power.ti.com</a>                                       |
| Microcontrollers       | <a href="http://microcontroller.ti.com">microcontroller.ti.com</a>                   |
| RFID                   | <a href="http://www.ti-rfid.com">www.ti-rfid.com</a>                                 |
| OMAP Mobile Processors | <a href="http://www.ti.com/omap">www.ti.com/omap</a>                                 |
| Wireless Connectivity  | <a href="http://www.ti.com/wirelessconnectivity">www.ti.com/wirelessconnectivity</a> |

### Applications

|                               |                                                                                          |
|-------------------------------|------------------------------------------------------------------------------------------|
| Automotive and Transportation | <a href="http://www.ti.com/automotive">www.ti.com/automotive</a>                         |
| Communications and Telecom    | <a href="http://www.ti.com/communications">www.ti.com/communications</a>                 |
| Computers and Peripherals     | <a href="http://www.ti.com/computers">www.ti.com/computers</a>                           |
| Consumer Electronics          | <a href="http://www.ti.com/consumer-apps">www.ti.com/consumer-apps</a>                   |
| Energy and Lighting           | <a href="http://www.ti.com/energy">www.ti.com/energy</a>                                 |
| Industrial                    | <a href="http://www.ti.com/industrial">www.ti.com/industrial</a>                         |
| Medical                       | <a href="http://www.ti.com/medical">www.ti.com/medical</a>                               |
| Security                      | <a href="http://www.ti.com/security">www.ti.com/security</a>                             |
| Space, Avionics and Defense   | <a href="http://www.ti.com/space-avionics-defense">www.ti.com/space-avionics-defense</a> |
| Video and Imaging             | <a href="http://www.ti.com/video">www.ti.com/video</a>                                   |

**TI E2E Community** [e2e.ti.com](http://e2e.ti.com)