

4.20mm (.165") Mini-Fit Double-Row Power Connectors

Specifications

- Voltage Rating : 250V AC/DC
- Current Rating : 7A AC/DC
- Withstanding Voltage : 1,500V AC/minute
- Insulation Resistance : 1,000MΩ min.
- Temperature Range : -40°C to + 105°C
- Contact Resistance : 20mΩ max.

Features:

■ HOUSING

Part No. : JS-1148 (Plug)

JS-1149 (Receptacle)

Poles : 2 - 24

Material : Nylon 66 UL94V-2 or V0

Q'ty : 1,000 pcs/Bag

■ WAFER

Part No. : JS-1150-XX (Straight)

JS-1150SP-XX (Straight, Square Pin)

JS-1151-XX (Straight, With Pegs)

JS-1152-XX (Right Angle)

JS-1153-XX (Right Angle, With Pegs)

JS-1154-XX (Right Angle, With Mount Ear)

Poles : 2 - 24

Material : Contact : Brass, Tin Plated

Base : Nylon 66 UL94V-2 or V0

Q'ty : 1,000 pcs/Bag

■ TERMINAL

Part No. : JS-1148-T, JS-1148-TH

JS-1149-T, JS-1149-TH

Applicable Wires : AWG# 18 -24

AWG# 16 (JS-1148-TH)



AWG# 16 (JS-1149-TH)

Material : Brass

Finish : Tin Plated

Thickness : 0.2mm


Q'ty : 5,000 pcs/Reel

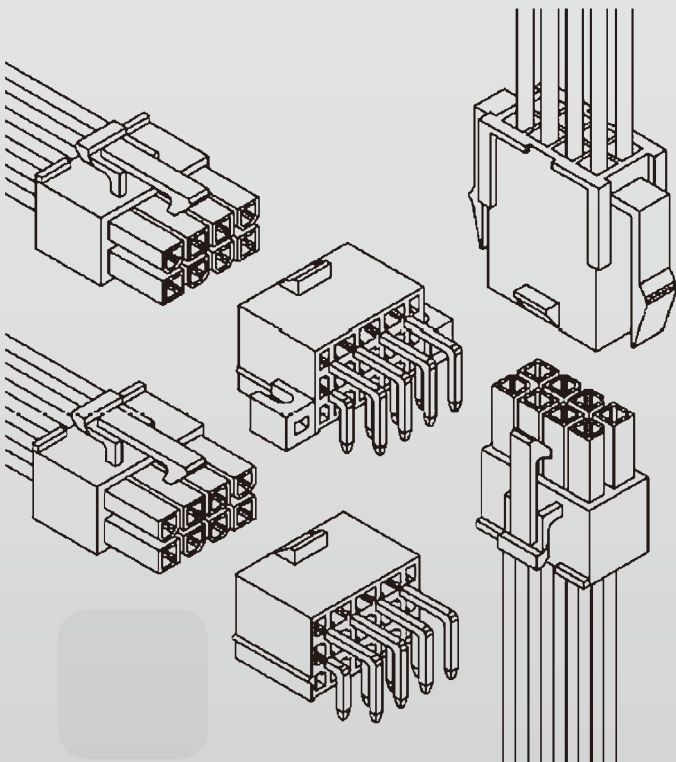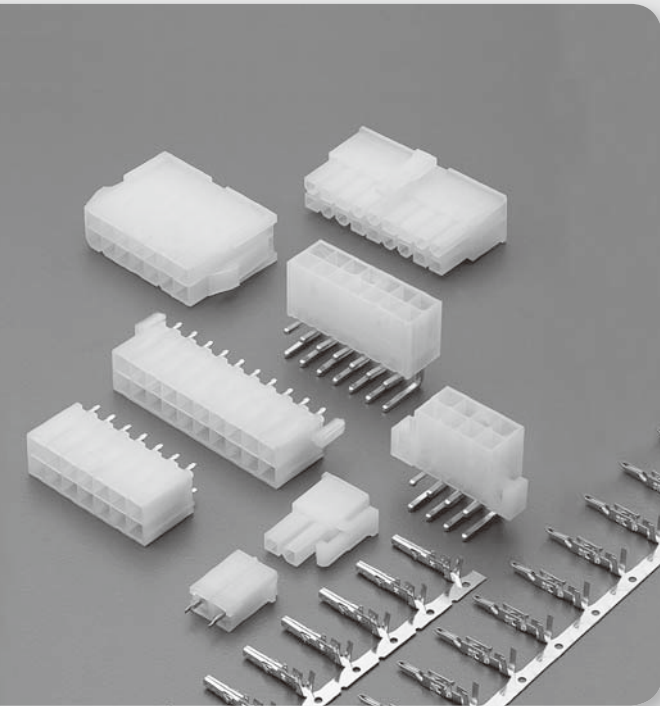

4.20mm (.165") Mini-Fit Double-Row Power Connectors

Housing

JS-1148

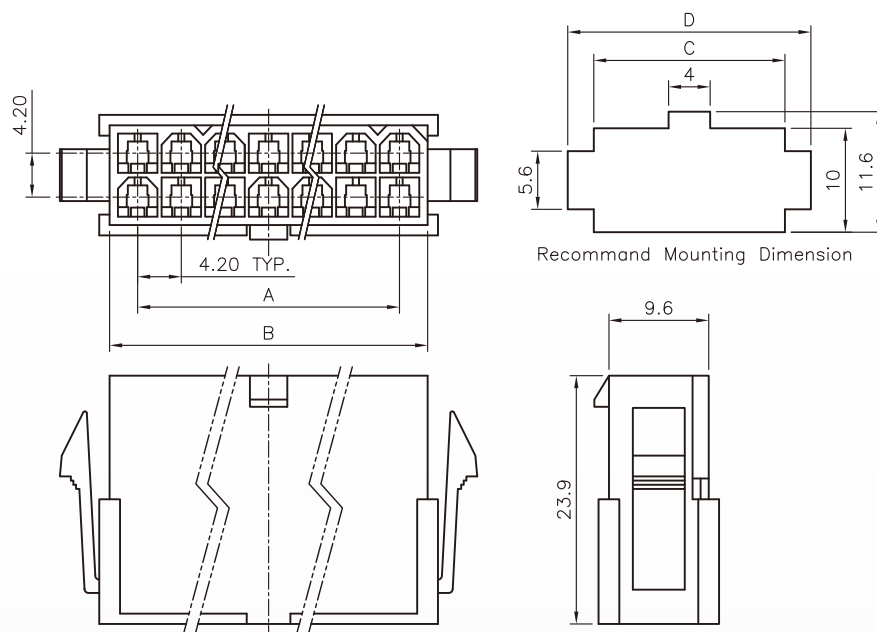

Poles	Part No.		Dimensions (mm)			
	JS-1148	JS-1149	A	B	C	D
2	JS-1148-02	JS-1149-02	-----	5.40	5.80	10.80
4	JS-1148-04	JS-1149-04	4.20	9.60	10.00	15.00
6	JS-1148-06	JS-1149-06	8.40	13.80	14.20	19.20
8	JS-1148-08	JS-1149-08	12.60	18.00	18.40	23.40
10	JS-1148-10	JS-1149-10	16.80	22.20	22.60	27.60
12	JS-1148-12	JS-1149-12	21.00	26.40	26.80	31.80

Poles	Part No.		Dimensions (mm)			
	JS-1148	JS-1149	A	B	C	D
14	JS-1148-14	JS-1149-14	25.20	30.60	31.00	36.00
16	JS-1148-16	JS-1149-16	29.40	34.80	35.20	35.20
18	JS-1148-18	JS-1149-18	33.60	39.00	39.40	39.40
20	JS-1148-20	JS-1149-20	37.80	43.20	43.60	43.60
22	JS-1148-22	JS-1149-22	42.00	47.40	47.80	47.80
24	JS-1148-24	JS-1149-24	46.20	51.60	52.00	52.00

Housing

JS-1149

