

4.20mm (.165") Mini-Fit Double-Row Power Connectors

Specifications

- Voltage Rating : 250V AC/DC
- Current Rating : 7A AC/DC
- Withstanding Voltage : 1,500V AC/minute
- Insulation Resistance : 1,000MΩ min.
- Temperature Range : -40°C to + 105°C
- Contact Resistance : 20mΩ max.

Features:

■ HOUSING

Part No. : JS-1148 (Plug)

JS-1149 (Receptacle)

Poles : 2 - 24

Material : Nylon 66 UL94V-2 or V0

Q'ty : 1,000 pcs/Bag

■ WAFER

Part No. : JS-1150-XX (Straight)

JS-1150SP-XX (Straight, Square Pin)

JS-1151-XX (Straight, With Pegs)

JS-1152-XX (Right Angle)

JS-1153-XX (Right Angle, With Pegs)

JS-1154-XX (Right Angle, With Mount Ear)

Poles : 2 - 24

Material : Contact : Brass, Tin Plated

Base : Nylon 66 UL94V-2 or V0

Q'ty : 1,000 pcs/Bag

■ TERMINAL

Part No. : JS-1148-T, JS-1148-TH

JS-1149-T, JS-1149-TH

Applicable Wires : AWG# 18 -24

AWG# 16 (JS-1148-TH)


AWG# 16 (JS-1149-TH)

Material : Brass

Finish : Tin Plated

Thickness : 0.2mm


Q'ty : 5,000 pcs/Reel

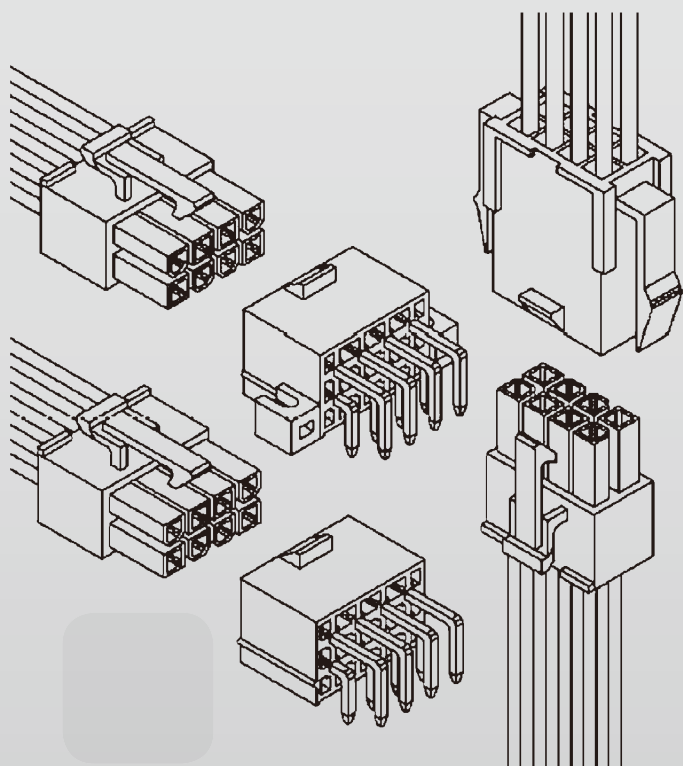

4.20mm (.165") Mini-Fit Double-Row Power Connectors

Wafer - Straight

JS-1151

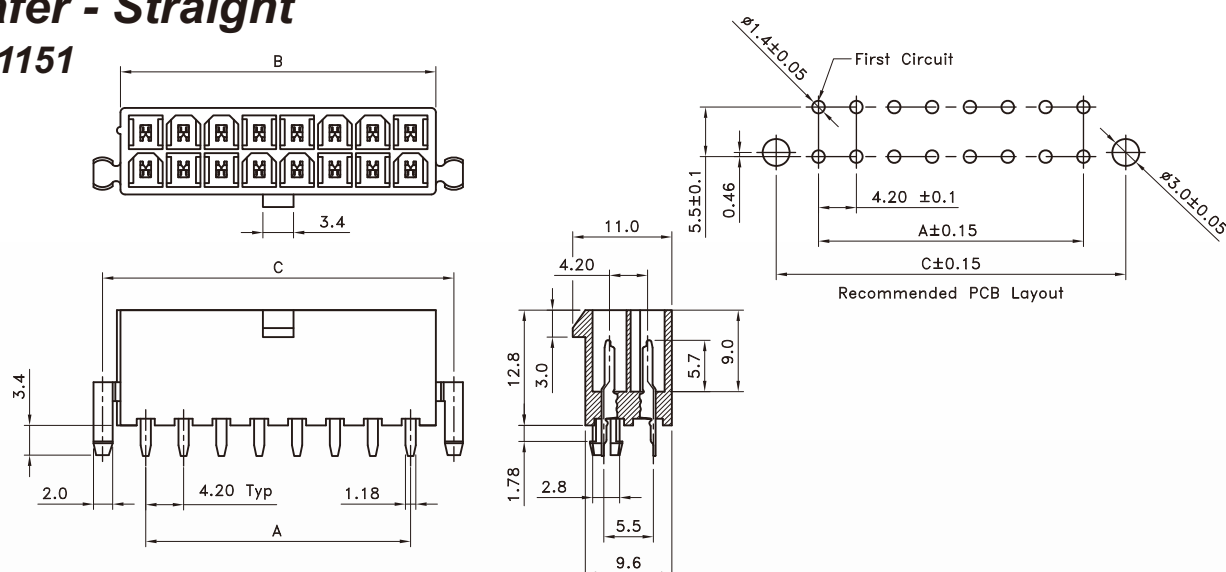


Poles	Part No.	Dimensions (mm)		
		A	B	C
2	JS-1151-02	---	5.60	9.40
4	JS-1151-04	4.20	9.80	13.60
6	JS-1151-06	8.40	14.00	17.80
8	JS-1151-08	12.60	18.20	22.00
10	JS-1151-10	16.80	22.40	26.20
12	JS-1151-12	21.00	26.60	30.40

Poles	Part No.	Dimensions (mm)		
		A	B	C
14	JS-1151-14	25.20	30.80	34.60
16	JS-1151-16	29.40	35.00	38.80
18	JS-1151-18	33.60	39.20	43.00
20	JS-1151-20	37.80	43.40	47.20
22	JS-1151-22	42.00	47.60	51.40
24	JS-1151-24	46.20	51.80	55.60

Wafer - Right Angle

JS-1152

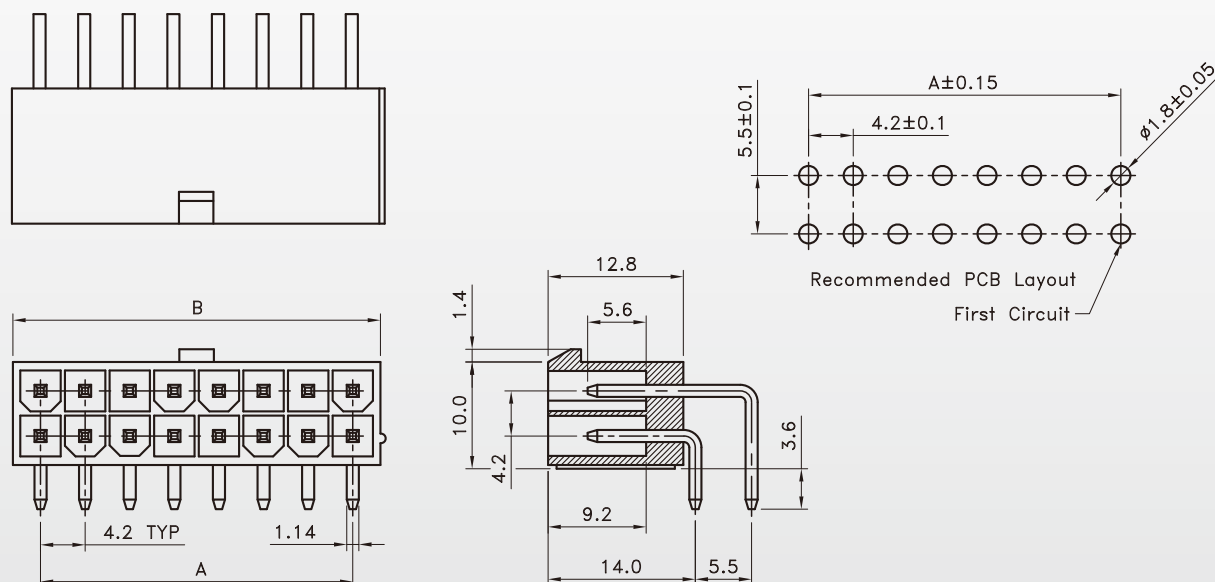

Poles	Part No.	Dimensions (mm)	
		A	B
2	JS-1152-02	---	5.60
4	JS-1152-04	4.20	9.80
6	JS-1152-06	8.40	14.00
8	JS-1152-08	12.60	18.20
10	JS-1152-10	16.80	22.40
12	JS-1152-12	21.00	26.60

Poles	Part No.	Dimensions (mm)	
		A	B
14	JS-1152-14	25.20	30.80
16	JS-1152-16	29.40	35.00
18	JS-1152-18	33.60	39.20
20	JS-1152-20	37.80	43.40
22	JS-1152-22	42.00	47.60
24	JS-1152-24	46.20	51.80