
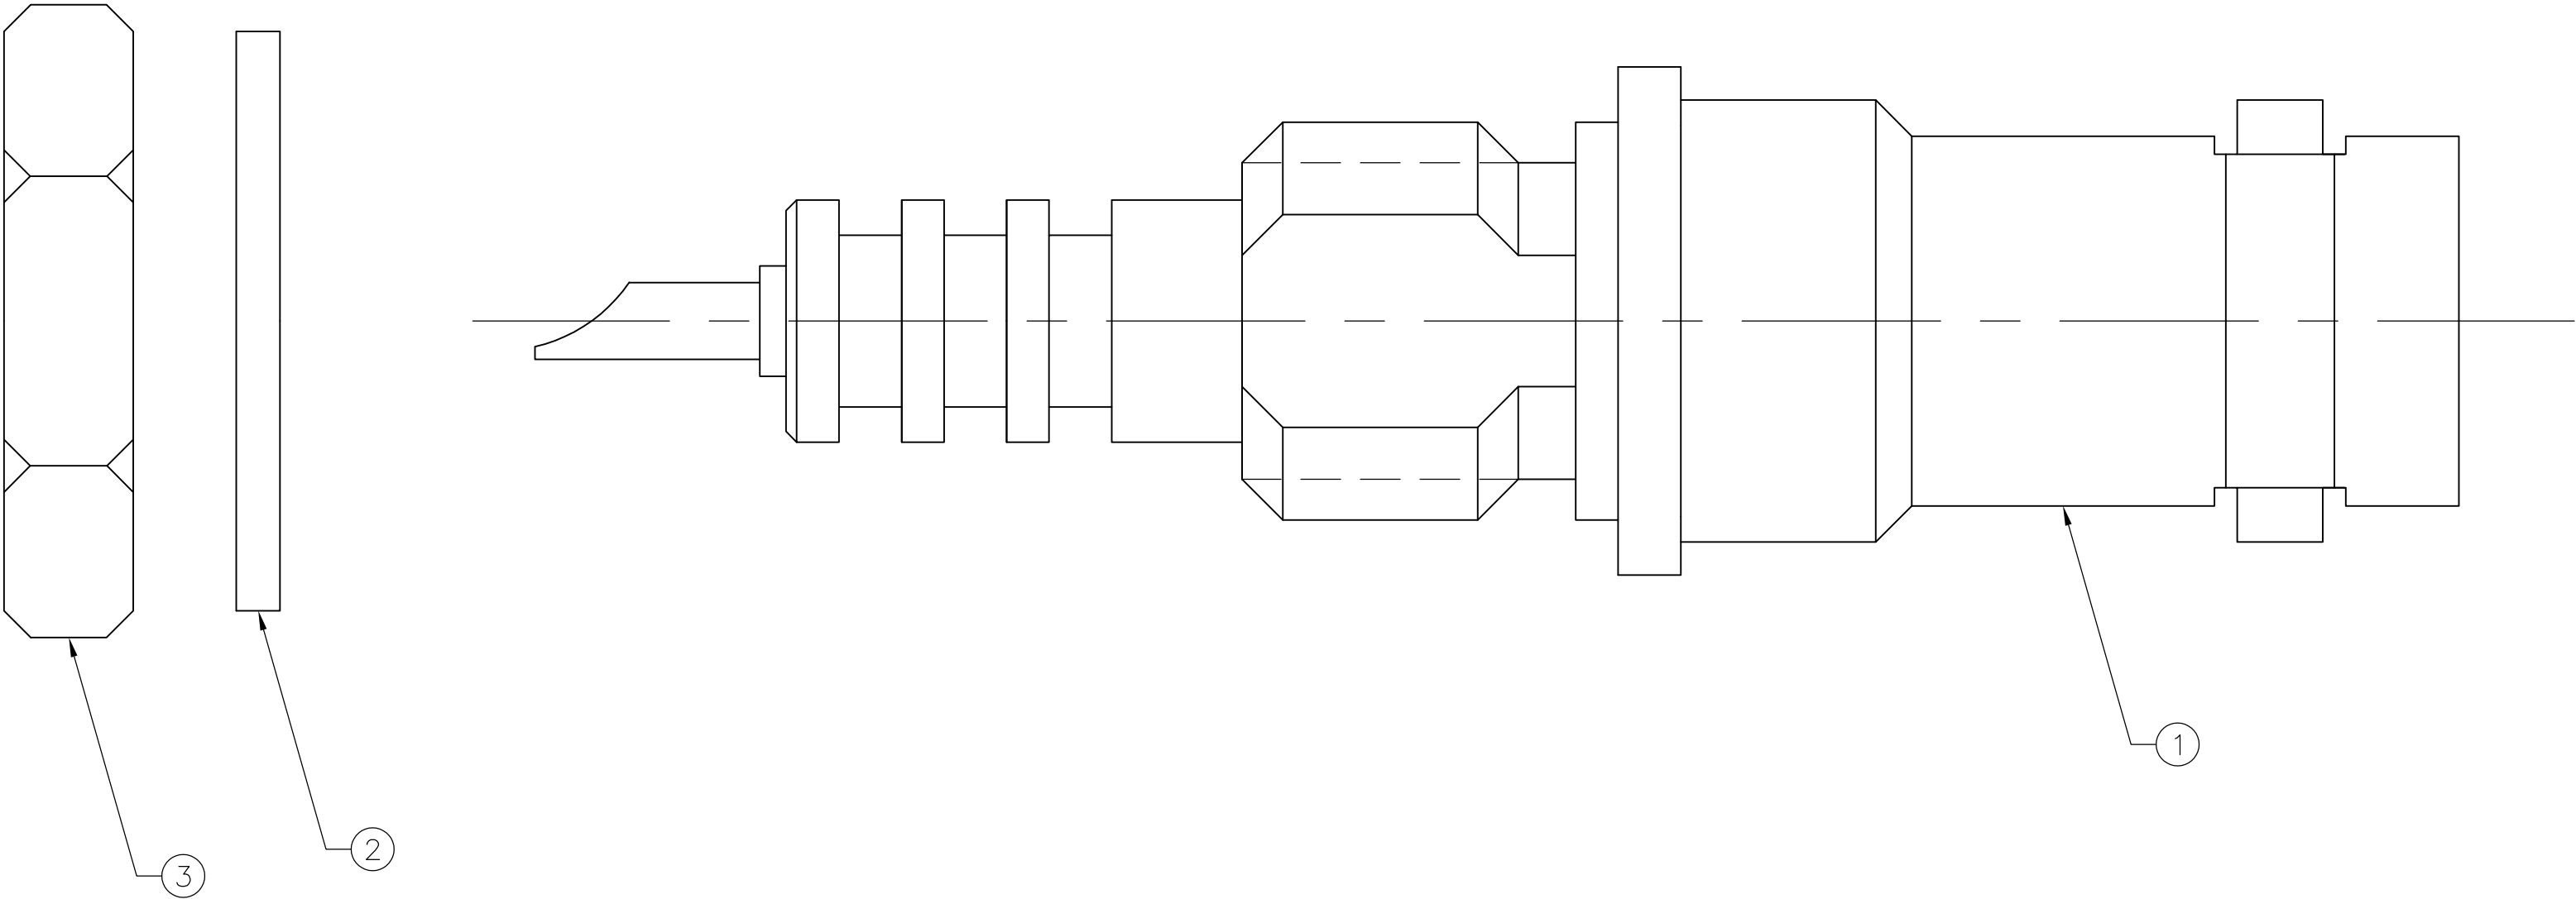


1. USE INSTRUCTION SHEET 408-2187.
2. ACCOMIDATES 0.79 [.031] TO 4.78 [.188] PANEL THICKNESS.



RECOMMENDED PANED CUTOUT
SCALE 4:1

.461 oz	1-330249-1	1-329492-1	51531-2	51494-2
.423 oz	9-330249-0	9-329492-0	9-51531-0	51494-1
WEIGHT	③ JAM NUT QTY: 1	② LOCK WASHER QTY: 1	① JACK ASSEMBLY QTY: 1	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN D.WALLACE		08JAN08				TE Connectivity			
		CHK J. LIPPERT		08JAN08							
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± 0.41[.016] 3 PLC ± - 4 PLC ± - ANGLES ± -		APVD J. LIPPERT		08JAN08		NAME SHV BULKHEAD SOLDER JACK			
				PRODUCT SPEC —							
				APPLICATION SPEC —							
				—							
				WEIGHT —							
MATERIAL —		FINISH —		SIZE A2		CAGE CODE 00779		DRAWING NO C-51494		RESTRICTED TO —	
CUSTOMER DRAWING						SCALE 1:1		SHEET 1 of 1		REV G1	