

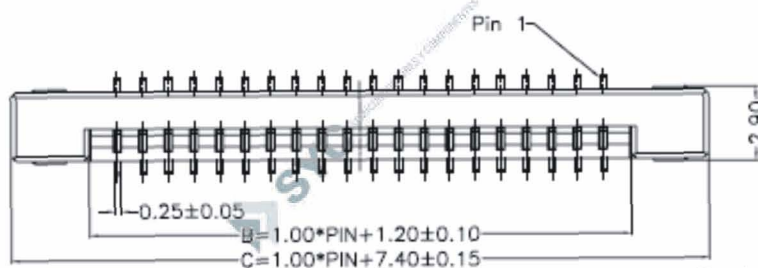



CODIGO



1223-XX-01

DESCRIPCION

Para impreso flexible 30V SMD 1mm recto

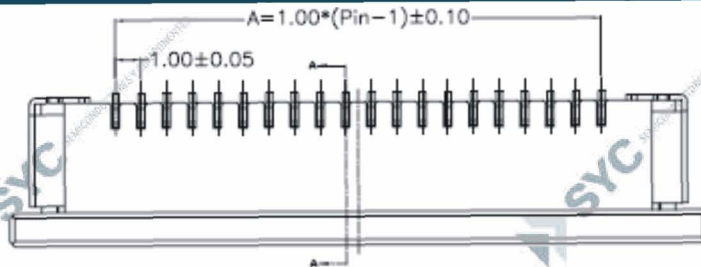


Contact Dimension

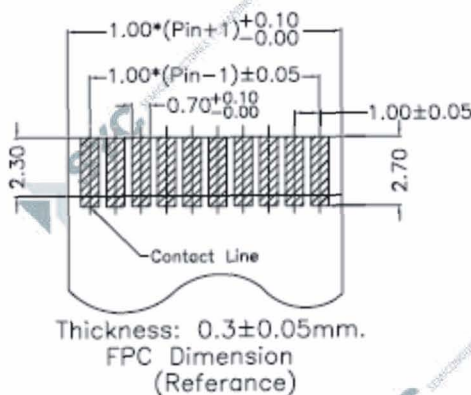

No.Of Pin	DimA	DimB	DimC
3	2.0	4.2	10.4
4	3.0	5.2	11.4
5	4.0	6.2	12.4
6	5.0	7.2	13.4
7	6.0	8.2	14.4
8	7.0	9.2	15.4
9	8.0	10.2	16.4
10	9.0	11.2	17.4
11	10.0	12.2	18.4
12	11.0	13.2	19.4
13	12.0	14.2	20.4
14	13.0	15.2	21.4
15	14.0	16.2	22.4
16	15.0	17.2	23.4
17	16.0	18.2	24.4

No.Of Pin	DimA	DimB	DimC
18	17.0	19.2	25.4
19	18.0	20.2	26.4
20	19.0	21.2	27.4
21	20.0	22.2	28.4
22	21.0	23.2	29.4
23	22.0	24.2	30.4
24	23.0	25.2	31.4
25	24.0	26.2	32.4
26	25.0	27.2	33.4
27	26.0	28.2	34.4
28	27.0	29.2	35.4
29	28.0	30.2	36.4
30	29.0	31.2	37.4
31	30.0	32.2	38.4
32	31.0	33.2	39.4

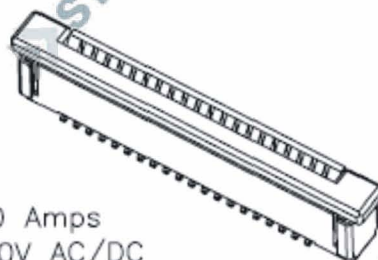

Specifications:

Current Rating: 1.0 Amps
Voltage Rating: 100V AC/DC
Contact Resistance: 30m Ohm Max
Insulator Resistance: 100M Ohm Min
Dielectric Withstanding Voltage: 500V R.m.s (for one minute)
Operating Temperature Range: $-25^{\circ}\text{C} \sim +105^{\circ}\text{C}$
Material:
Contact: Copper Alloy
Plastic: High Temp Plastic UL94V-0
Plating: Tin plating
1223-XX-01

Vertical contact type
No. of Contacts

