

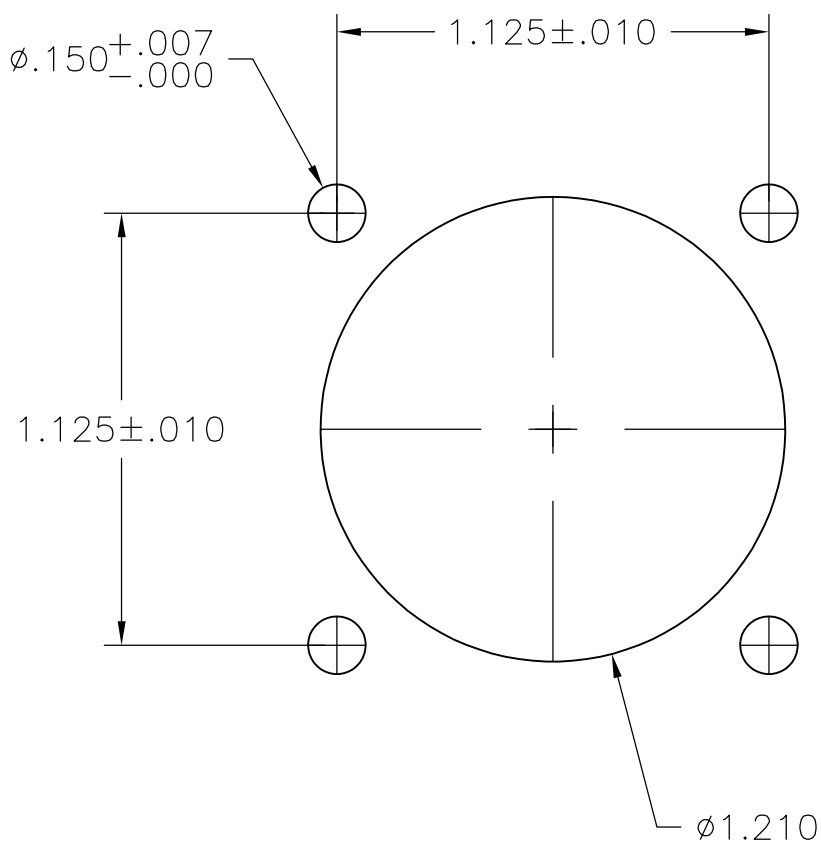
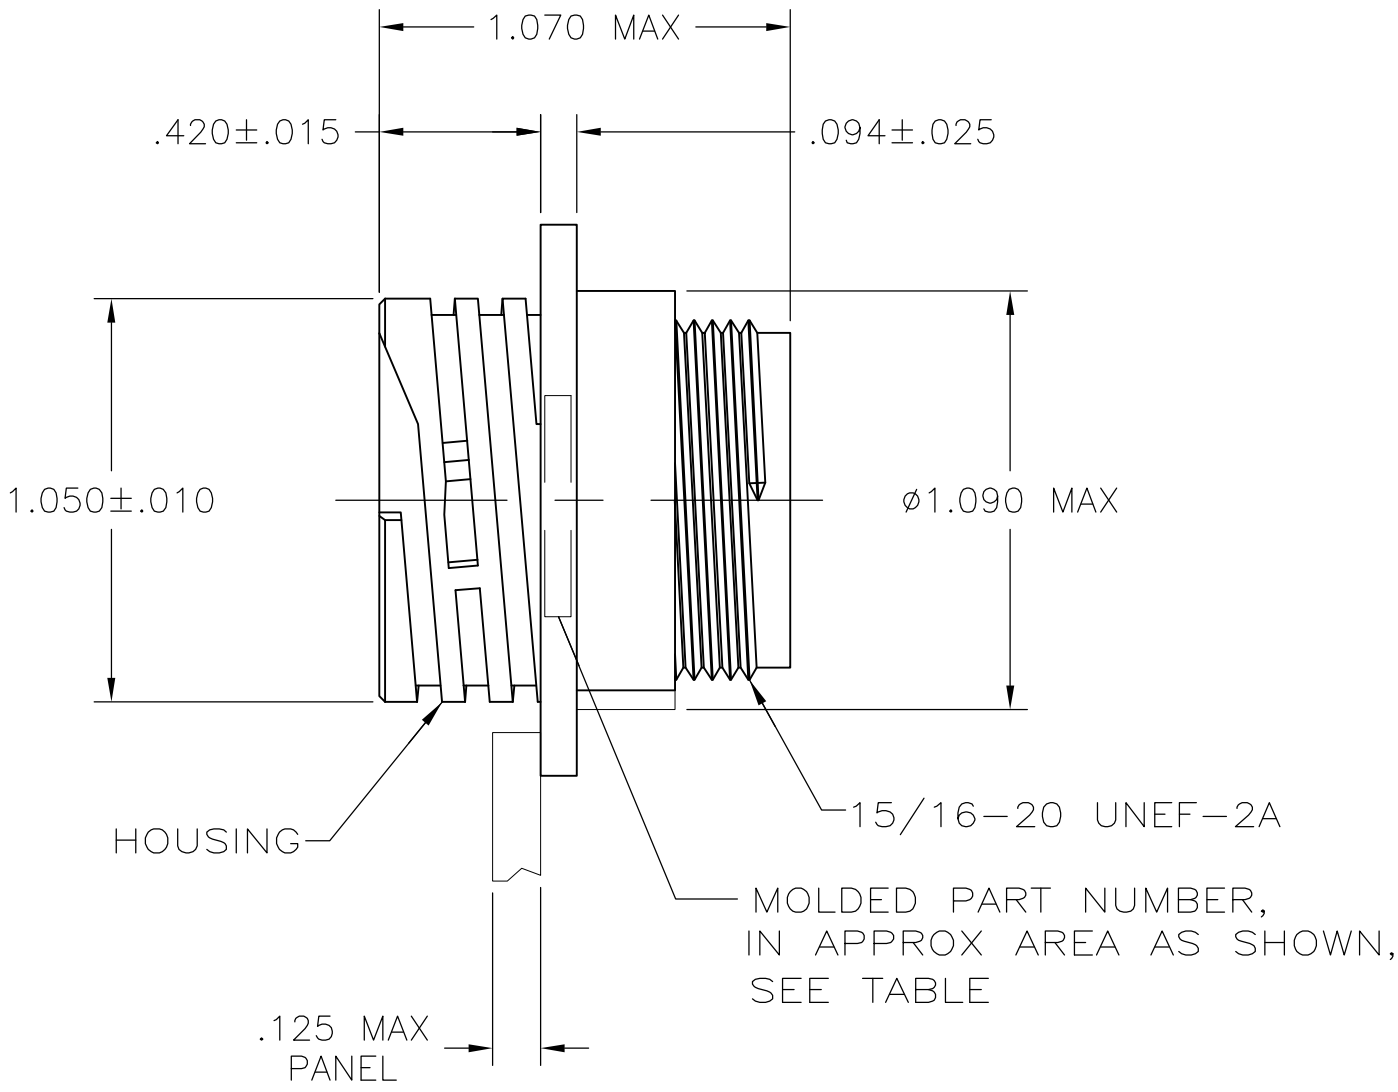
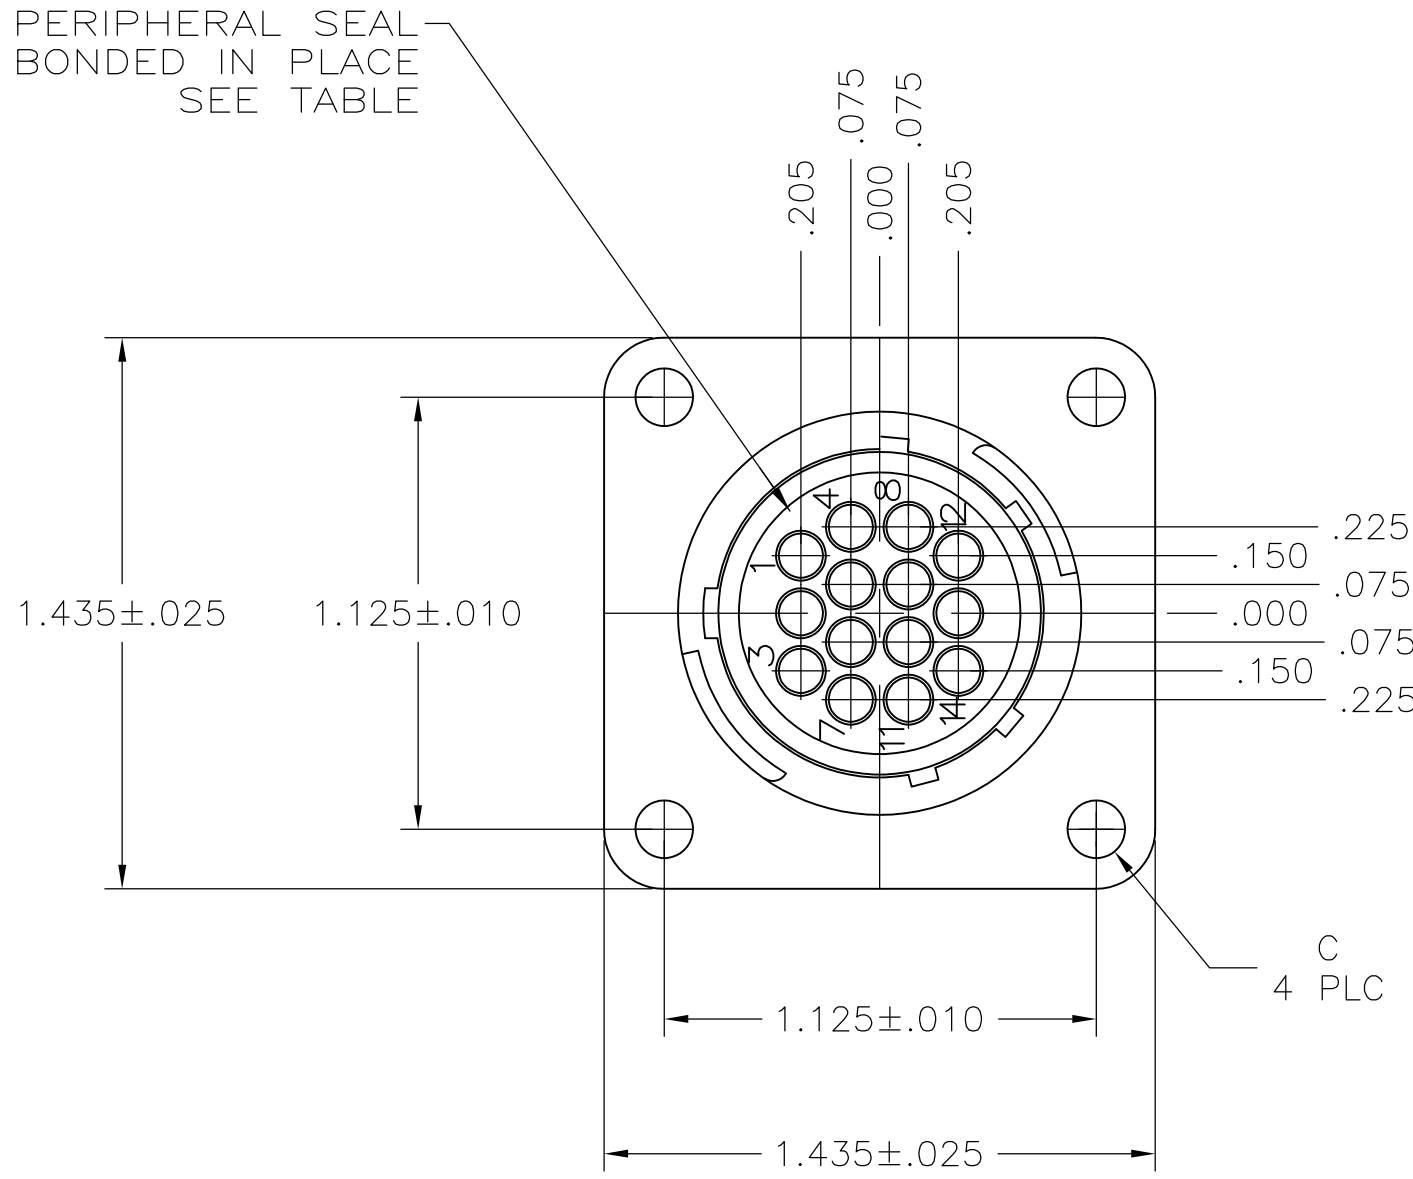


REVISIONS						
P	T	LTR	DESCRIPTION		DATE	APVD
	S		REVISED	PER ECO-12-015521	28SEP12	KH MZ
	T		REVISED	PER ECO-17-000037	10MAR2017	RS MZ

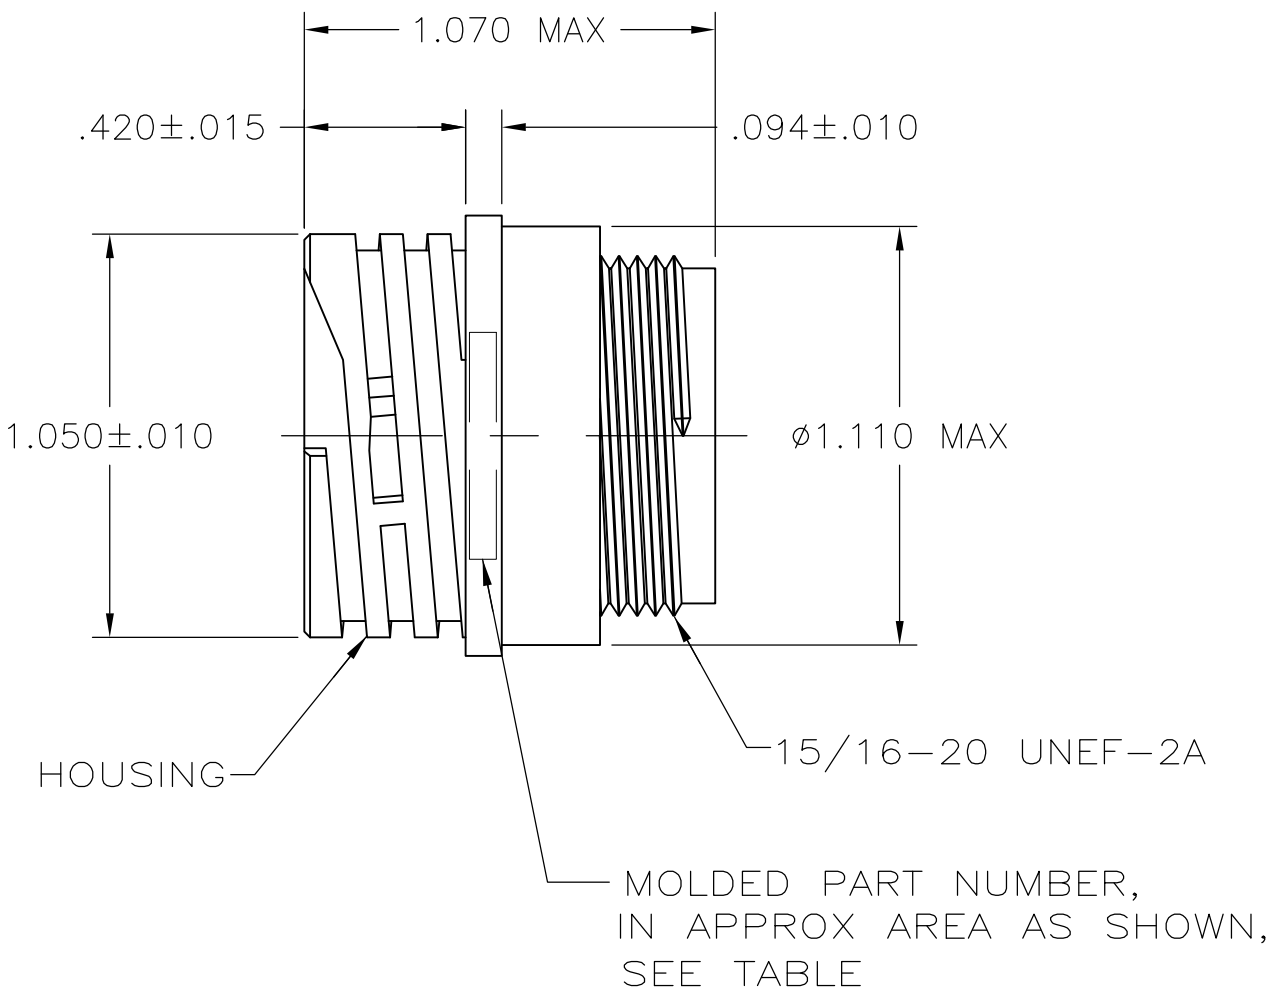

RECOMMENDED PANEL CUTOUT


DETAIL A

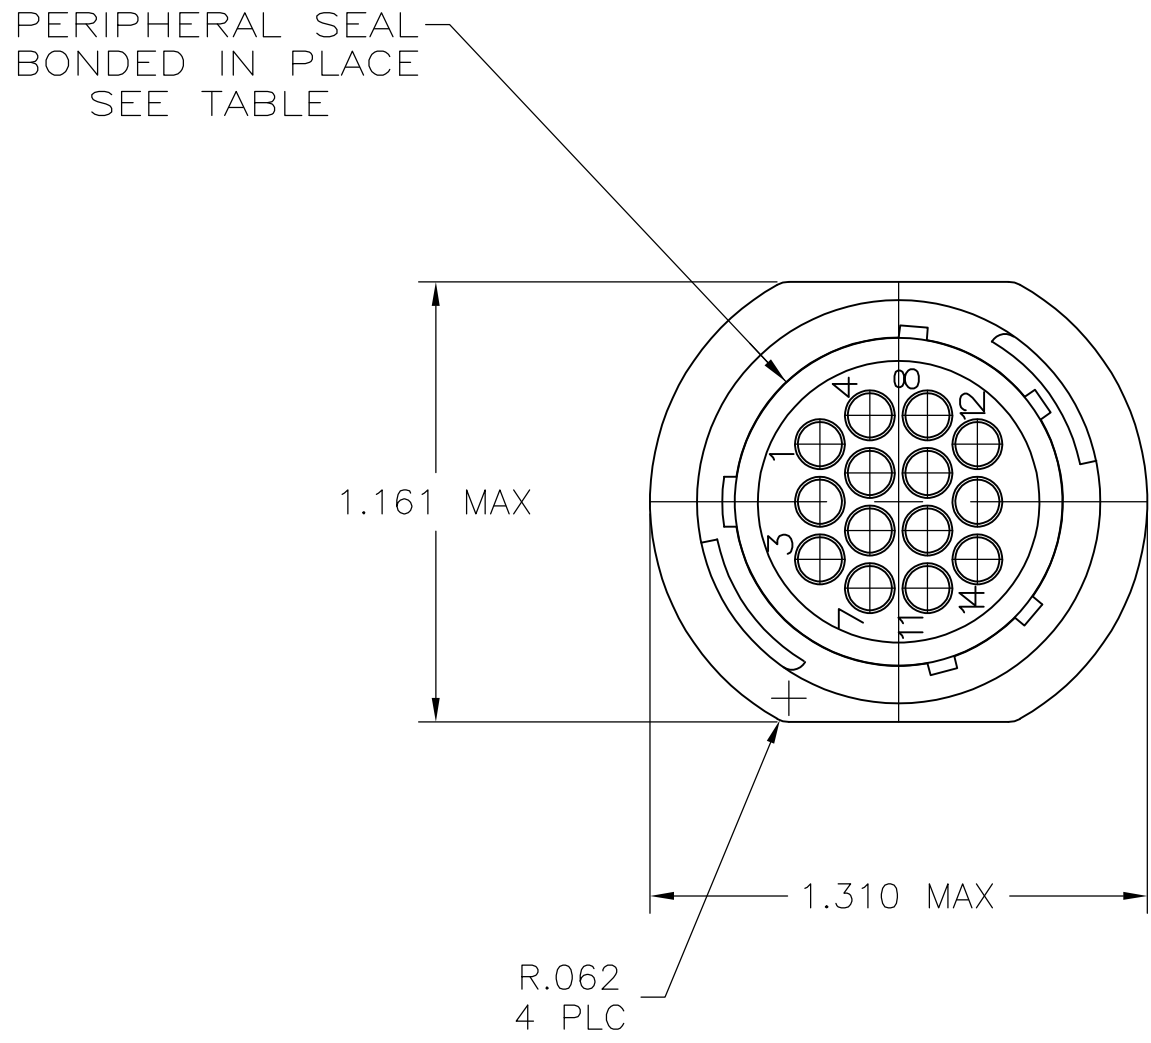

DETAIL B

- 1 CAVITY IDENTIFICATION ON FRONT AND REAR FACE.
- 2 WILL ACCEPT FOURTEEN (14) MULTIMATE SOCKET CONTACTS.

OBsolete	4-40 THREADED INSERTS	-	STANDARD	YES	A	206043-8
OBsolete	ø.150	-	SMALL PACK	NO	A	206043-6
	-	-	STANDARD	YES	B	206043-5
	ø.150	-	STANDARD	YES	A	206043-4
	-	-	STANDARD	NO	B	206043-3
	ø.150	206043-1	STANDARD	NO	A	206043-1
	DIM C	MOLDED PART NUMBER	PACKAGING	PERIPHERAL SEAL	SEE DETAIL	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN W. LENKER CHK R. STONE APVD -	09/10/92 08/11/93 -	 TE Connectivity			
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME			
	0 PLC	± -	PRODUCT SPEC	RECEPTACLE ASSEMBLY, REVERSE			
	1 PLC	± -	108-10024	SEX, SERIES 1, 17-14, CPC			
	2 PLC	± 0.13 [.005]	APPLICATION SPEC				
	3 PLC	± -	WEIGHT	-			
	4 PLC	± -	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO	
MATERIAL HOUSING: NYLON BLACK		FINISH	-	A1	00779	C206043	-
CUSTOMER DRAWING			SCALE	2:1	SHEET	1 OF 1	REV T