



FEMALE

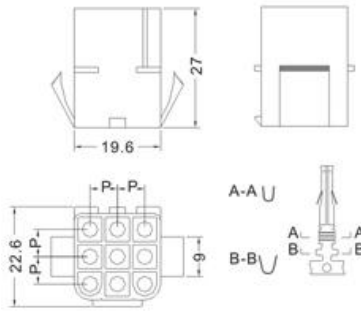

MALE



Sample									
Type	142-01M 142-01F	142-02M 142-02F	142-03M 142-03F	142-04MN 142-04FN	142-04M 142-04F	142-06M 142-06F	142-09M 142-09F	142-12M 142-12F	142-15M 142-15F
Current rating	13A	13A	11A	11A	11A	8A	8A	8A	8A

Specifications:

Contact Resistance: 10m Ω max
 Insulator Resistance: 1000M Ω min
 Dielectric Strength: AC 1500V For 1 minute
 Current Rating: 13-8AMP
 Voltage Rating: 300V/AC
 Pitch: 6.2mm

Material:

Housing: Nylon UL94V-0
 Contact: Phosphor Bronze(Tin Plated)

