

100 series

D-SUB SOLDER TYPE

Position	A	B	C	D	E
9	16.92	24.99	30.81	19.36	16.33
15	25.25	33.32	39.14	27.64	24.66
25	38.96	47.04	53.04	41.08	38.38
37	55.42	63.50	69.32	57.38	54.84
50	54.24	61.11	67.10	55.16	52.46


Specifications:

Contact Resistance: 30m Ω max.at DC 100 mA
 Insulator Resistance: 1000M Ω min.at DC 500V
 Current Rating: 5AMP


Dielectric Withstanding

Voltage: AC 1000V For 1 minute
 Operating Temperature: -55° C--+105° C
 Contact: Brass or Phosphor Bronze
 Housing: PBT &30% Glass Fiber(UL 94V-0)


How To Order

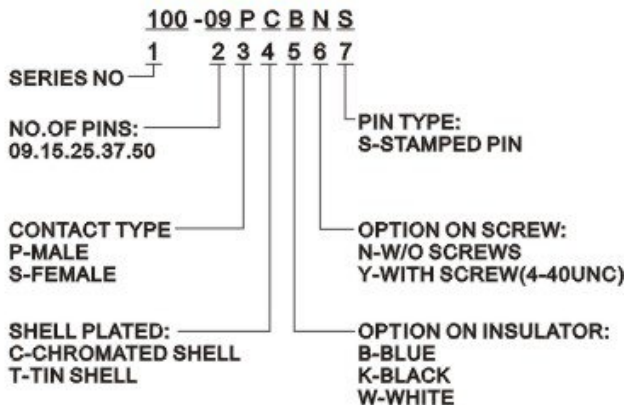

[MALE]

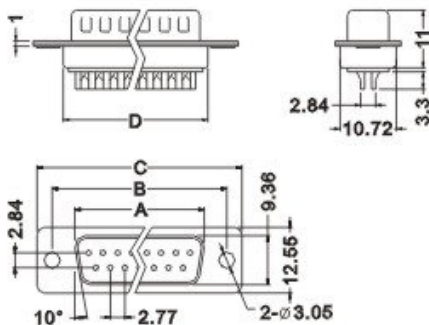

[FEMALE]

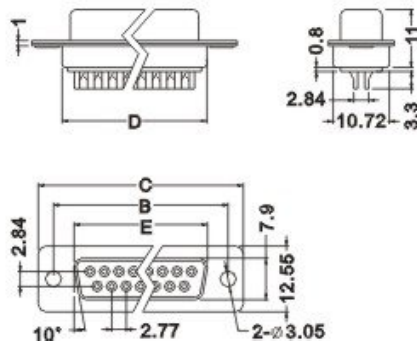

Kcan XX/2 ZSG-CAB

Kcan XX/2 VSG-CAB