



Position	A	B	C	D	E
9	17.78	24.99	30.81	11.80	16.20
15	26.15	33.32	39.20	19.30	24.66
25	39.94	47.04	53.10	32.00	38.65
37	56.56	63.50	69.50	47.30	54.84

MALE

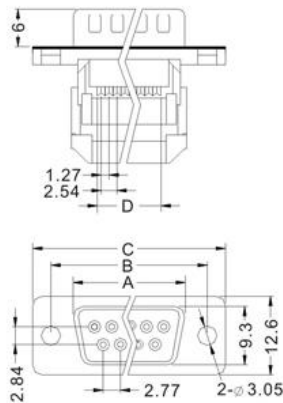

FEMALE

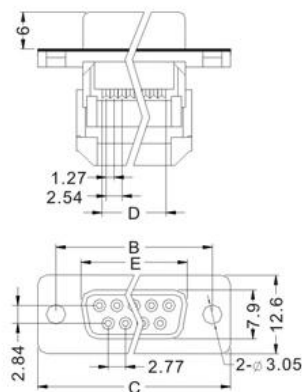


Specifications:

Contact Resistance: 30m Ω max.at DC 100 mA
 Insulator Resistance: 1000M Ω min.at DC 500V
 Current Rating: 1AMP


Dielectric Withstanding

Voltage: AC 500V For 1 minute
 Operating Temperature: -55° C--+105° C
 Contact: Male Brass
 Female Phosphor Bronze
 Housing: PBT &30% Glass Fiber(UL 94V-0)

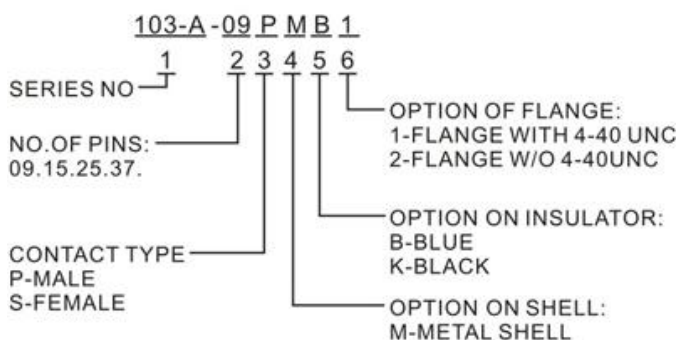


Position	A	B	C	D	E
9	17.78	24.99	30.81	11.80	16.20
15	26.15	33.32	39.20	19.30	24.66
25	39.94	47.04	53.10	32.00	38.65
37	56.56	63.50	69.50	47.30	54.84

MALE

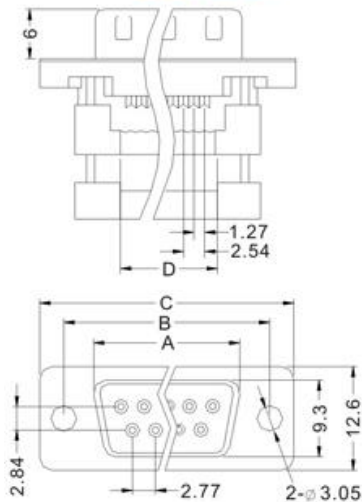

FEMALE

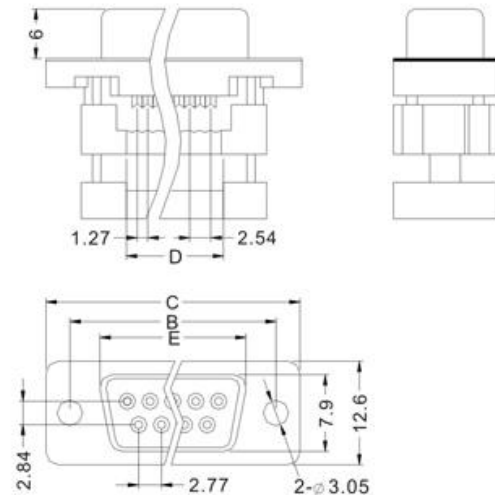

Specifications:

Contact Resistance: 30m Ω max.at DC 100 mA

Insulator Resistance: 1000M Ω min.at DC 500V

Current Rating: 1AMP

Dielectric Withstanding

Voltage: AC 500V For 1 minute

Operating Temperature: -55° C--+105° C

Contact: Male Brass

Female Phosphor Bronze

Housing: PBT &30% Glass Fiber(UL 94V-0)

