



Position	A	B	C	D	E	F
15	30.81	17.18	2.29	24.99	19.36	16.20
26	39.20	26.15	2.29	33.32	27.64	24.66
44	53.10	39.94	2.29	47.04	38.38	38.65
62	69.50	56.56	2.41	63.50	54.84	54.84

MALE

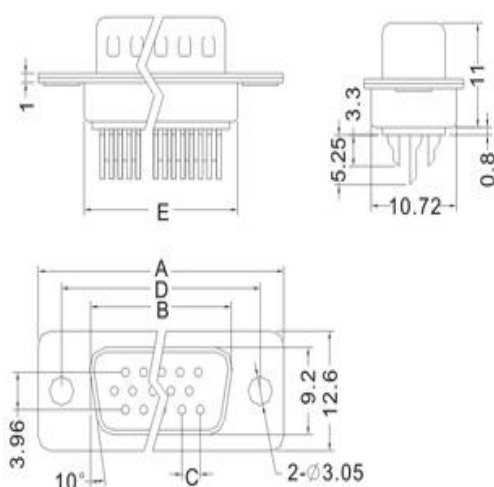

FEMALE

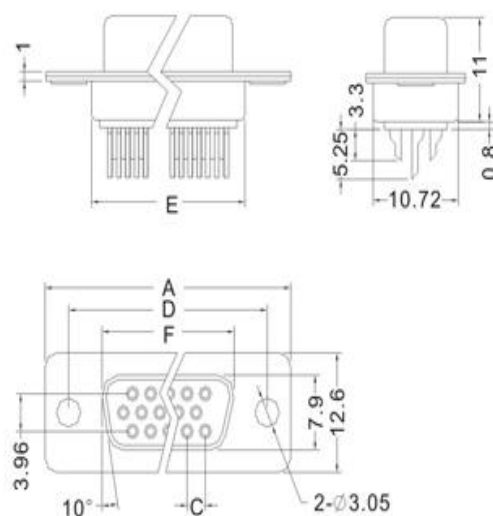

Specifications:

Contact Resistance: 30m Ω max.at DC 100 mA
 Insulator Resistance: 1000M Ω min.at DC 500V
 Current Rating: 3AMP

Dielectric Withstanding

Voltage: AC 1000V For 1 minute
 Operating Temperature: -55° C--+105° C
 Contact: Brass or Phosphor Bronze
 Housing: PBT &30% Glass Fiber(UL 94V-0)

