





MALE

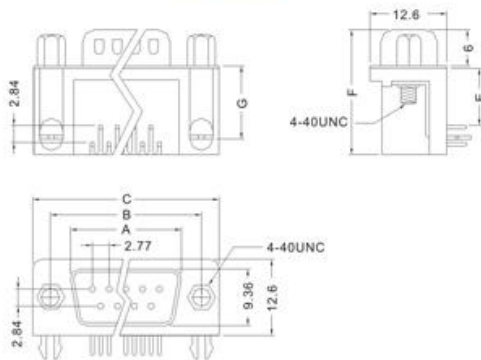

FEMALE

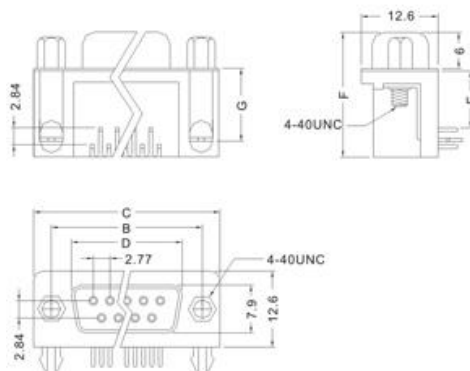

D-SUB CONNECTORS RIGHT ANGLE MOUNTING OPTIONS

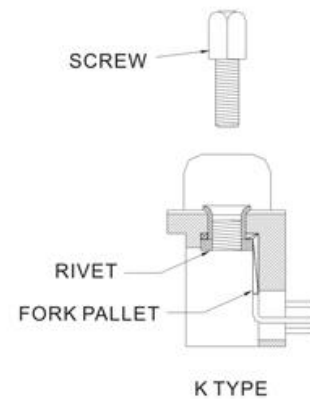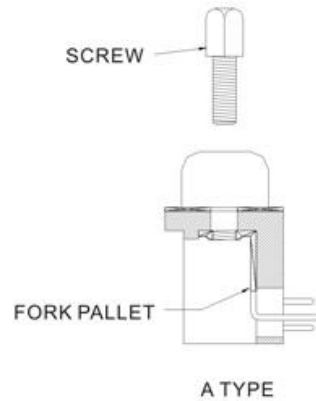

Specifications:

Contact Resistance: 30m Ω max.at DC 100 mA
Insulator Resistance: 1000M Ω min.at DC 500V
Current Rating: 5AMP

Dielectric Withstanding

Voltage: AC 1000V For 1 minute
Operating Temperature: -55° C--+105° C
Contact: Brass or Phosphor Bronze
Housing: PBT &30% Glass Fiber(UL 94V-0)

