
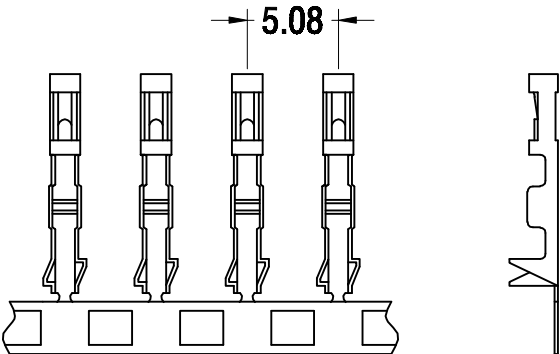




Specifications:
Contact Resistance: 100mΩ max.
Insulator Resistance: 1000MΩ min.at DC 500V
Current Rating: 3AMP

Dielectric Withstanding
Voltage: AC 500V For 1 minute
Operating Temperature:-25°C--+85°C
Contact: Phosphor Bronze
Housing: Nylon UL 94V-0

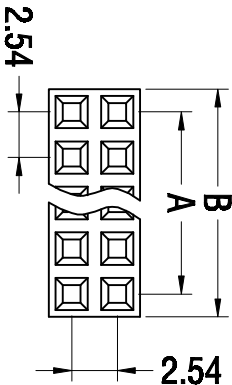

Dimension	4 thru 64
A	2.54*Position NO./2
B	2.54*Position NO./2-2.54

设计/Designed by	绘图/Drawn by	审核/Checked by	批准/Approved by	备注/Remarks	
				数量/Quantity	单位/Units

新莱亚电子		文件编号/rev. No.		X" 0.2"	
XINLAIYA ELECTRONIC CO.,LTD		1304(连接器)-A		X" 0.1"	
备注/Remarks		页序/Sheet		X" 0.050"	
				X" 0.025"	
				单位/Units	
				mm	