
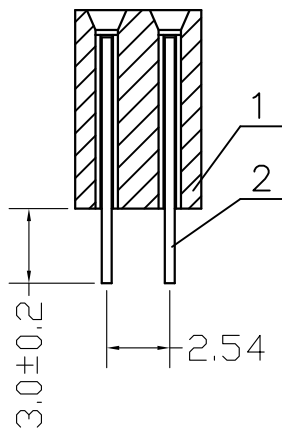
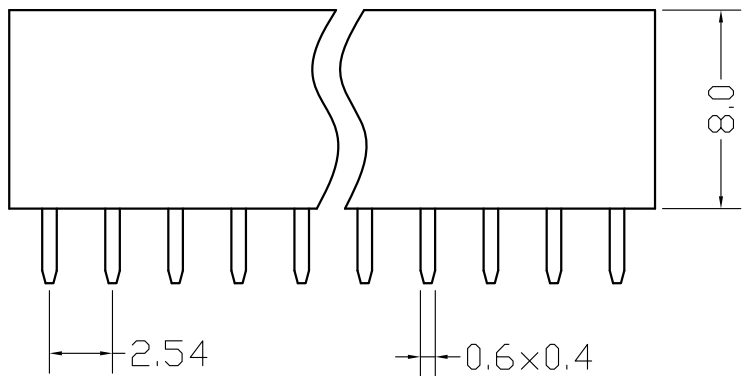


序号/RevNo.	名称/Title	文件编号/File No.
1	114双排塑料件	QJ/XYT-11125
2	114端子图 (直)	QJ/XYT-11128

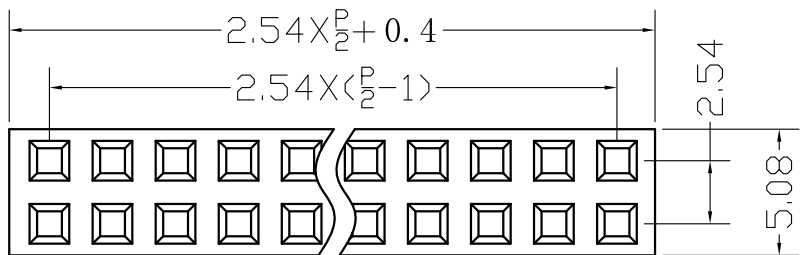

Specifications:

Contact Resistance: 30mΩ max.at DC 100 mA

Insulator Resistance: 1000MΩ min.at DC 500V

Current Rating: 1AMP

Dielectric Withstanding

Voltage: AC 500V For 1 minute

Operating Temperature:-55°C--+105°C

Contact: Brass(Gold flash)

Housing: PBT &30% Glass Fiber(UL 94V-0)

要求:

1. 塑料件无裂痕。
2. 整排针成一直线，相邻针之间相互平行。

序号/RevNo.	更改记录/Revision note	签名/Signature	日期/Date

设计/Designed by	绘图/Drawing by	审核/Checked by	批准/Approved by
		图名/Title	文件编号/File No.
		114A-DSXXG	QJ/XYT-12035
		版本/Version	A0
备注/Remark		单位/Units: mm	