



SINGLE ROW

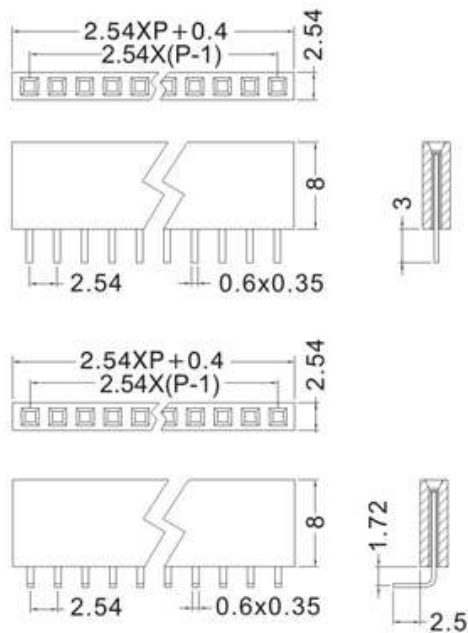

DUAL ROW

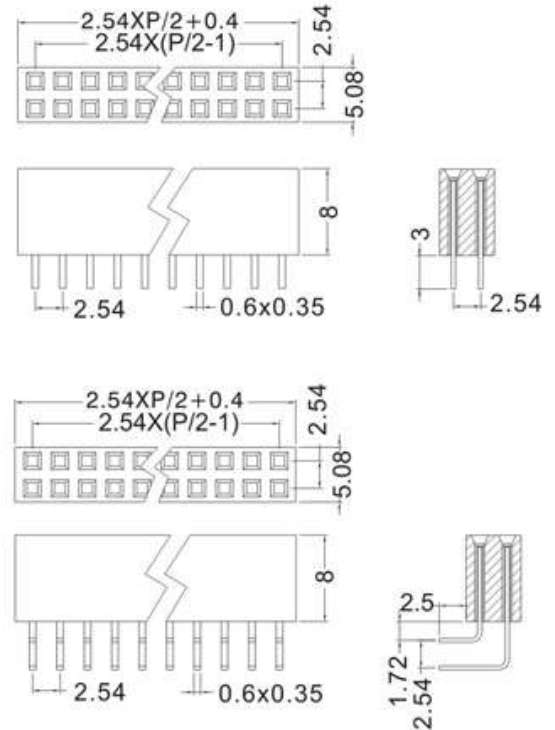

Specifications:

Contact Resistance: $30m \Omega$ max.at DC 100 mA
 Insulator Resistance: $1000M \Omega$ min.at DC 500V
 Current Rating: 1AMP

Dielectric Withstanding

Voltage: AC 500V For 1 minute
 Operating Temperature: $-55^{\circ}C$ to $+105^{\circ}C$
 Contact: Brass
 Housing: PBT & 30% Glass Fiber(UL 94V-0)

