


SPECIFICATION




Current Rating:3 Amps
Withstand Voltage:1000V AC
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-40°C~+105°C
Contact:Brass,Gold Flash Over Nickel
Insulator:PBT(UL94V-0),Black
RoHS Compliant

F D 1 X XX - H
(1) (2) (3) (4) (5)

- (1) F:2.54mm Female Header
- (2) D:DIP Straight
- (3) 1:Single Row
- (4) XX:No. Of Position/Per Row
- (5) H:RoHS Compliant

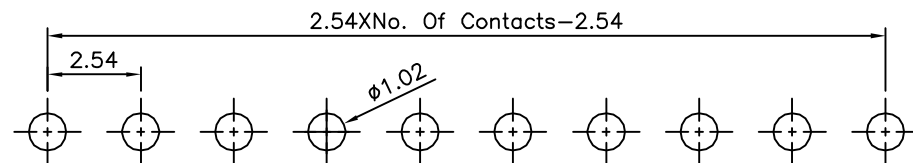

Recommended P.C.B. Layout(Top View)
(PCB Board Tolerance±0.05)

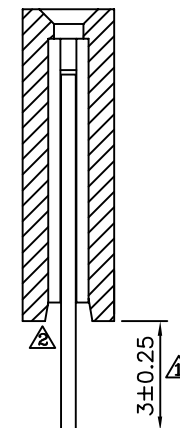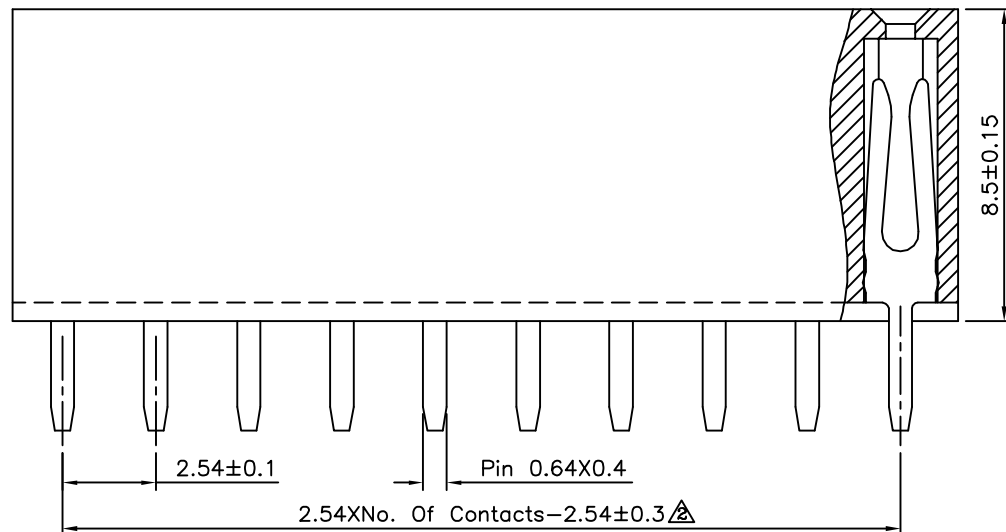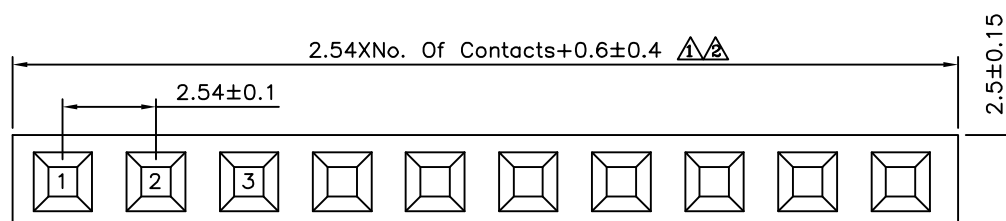

CATEGORY		APPROVED BY	
PART No.		EMILY	
DRAWING No.		CHECKED BY	
FD1XXX-H		HZF	
SCALE		DRAWING BY	
NONE		SAN	
REV.		A2	

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE			
△ X. ±0.25	X.* ±2°		
.X ±0.20	.X* ±1.5°		
.XX ±0.15	.XX* ±1°		
.XXX ±0.10	.XXX* ±0.5°		
UNIT	mm		
NO. REV.		REVISIONS	
		CHK	
		DATE	

A2	Modify Data	HZF	05/28/2014
A1	Modify Data	HZF	09/04/2013
A0	NEW RELEASE	HZF	08/03/2011