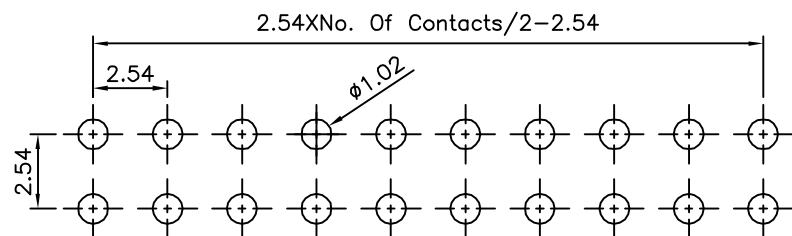


SPECIFICATION

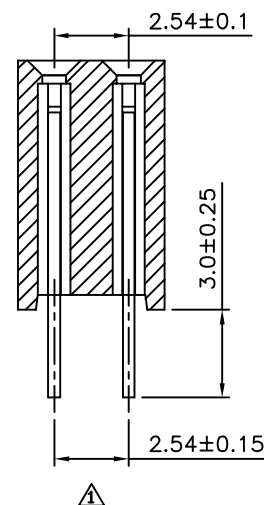
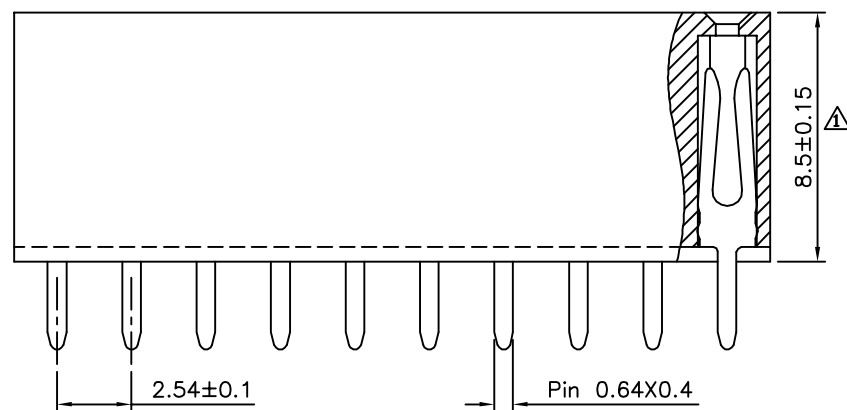
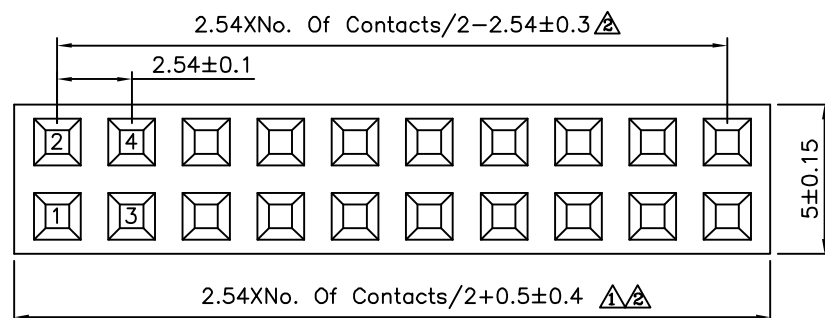
Current Rating:3 Amps
Withstand Voltage:1000V AC
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-40°C~+105°C
Contact:Brass,Gold Flash Over Nickel
Insulator:PBT(UL94V-0),Black
RoHS Compliant

F D 2 X XX - H
(1) (2) (3) (4) (5)

- (1) F:2.54mm Female Header
(2) D:DIP Straight
(3) 2: Dual Row
(4) XX:No. Of Position/Per Row
(5) H:RoHS Compliant



Recommended P.C.B. Layout(Top View)
(PCB Board Tolerance±0.05)

**AUK**

A MEMBER OF AUK GROUP

太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

CATEGORY		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE						
PART No.		CHECKED BY		X. ±0.25 X.* ±2°						
DRAWING No.		DRAWING BY		.X ±0.20 .X* ±1.5°						
SCALE		REV.		.XX ±0.15 .XX* ±1°						
NONE		A2		.XXX ±0.10 .XXX* ±0.5°						
UNIT		mm		UNIT						
NO.		REV.		REVISIONS						
A2		A1		A0						
Modify Data		Modify Data		NEW RELEASE						
HZF		HZF		HZF						
05/28/2014		09/03/2013		08/03/2011						
DATE		DATE		DATE						