



Position	A	B	C	Position	A	B	C
10	17.2	16.1	8	30	37.2	36.1	28
12	19.2	18.1	10	34	41.2	40.1	32
14	21.2	20.1	12	40	47.2	46.1	38
16	23.2	22.1	14	50	57.2	56.1	48
20	27.2	26.1	18	60	67.2	66.1	58
26	33.2	32.1	24	64	71.2	70.1	62

STRAIGHT

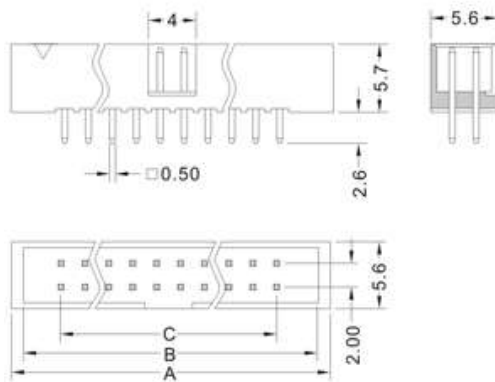

RIGHT ANGLE

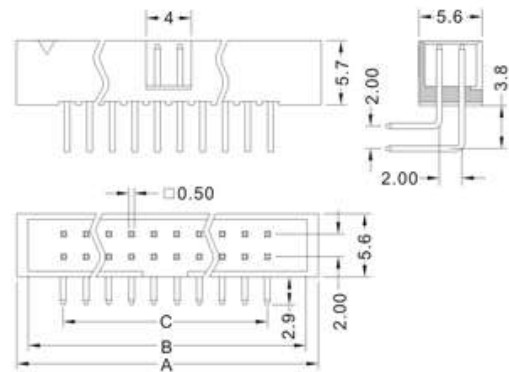

Specifications:

Contact Resistance: 30mΩ max.at DC 100mA
 Insulator Resistance: 1000MΩ min.at DC 500V
 Current Rating: 1AMP

Dielectric Withstanding

Voltage: AC 500V For 1 minute
 Operating Temperature: -55° C- +105° C
 Contact: Brass
 Housing: PBT &30% Glass Fiber(UL 94V-0)

