

Current Rating: 1Amps

Insulator Resistance: 5000Megohms Min.

Dielectric Withstanding: AC 500V

Operating Temperature: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$

Max. Processing Temp 230°C for 60 seconds

Contact Material: Copper Alloy




Insulator Material: Polyester, UL 94V-0

Standard: Nylon-6T

Finish: Gold Plated

$2.0 \times \text{No. of Contacts} / 2 + 7.3 \pm 0.2$


$2.0 \times \text{No. of Contacts} / 2 - 2.0 \pm 0.248$

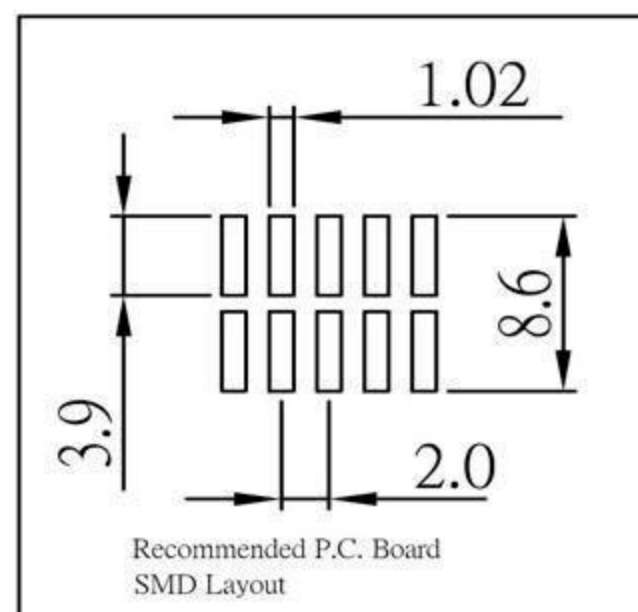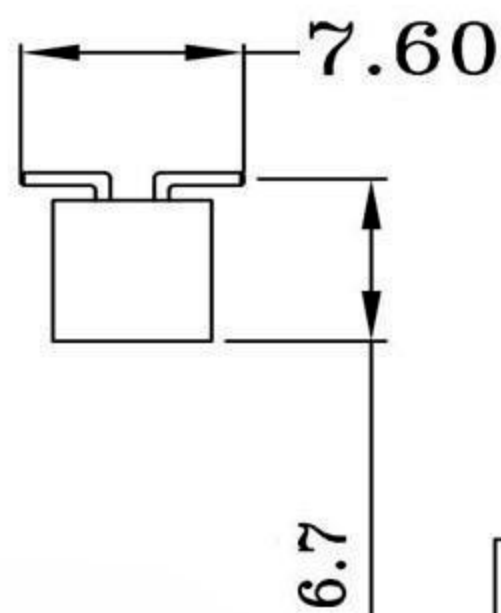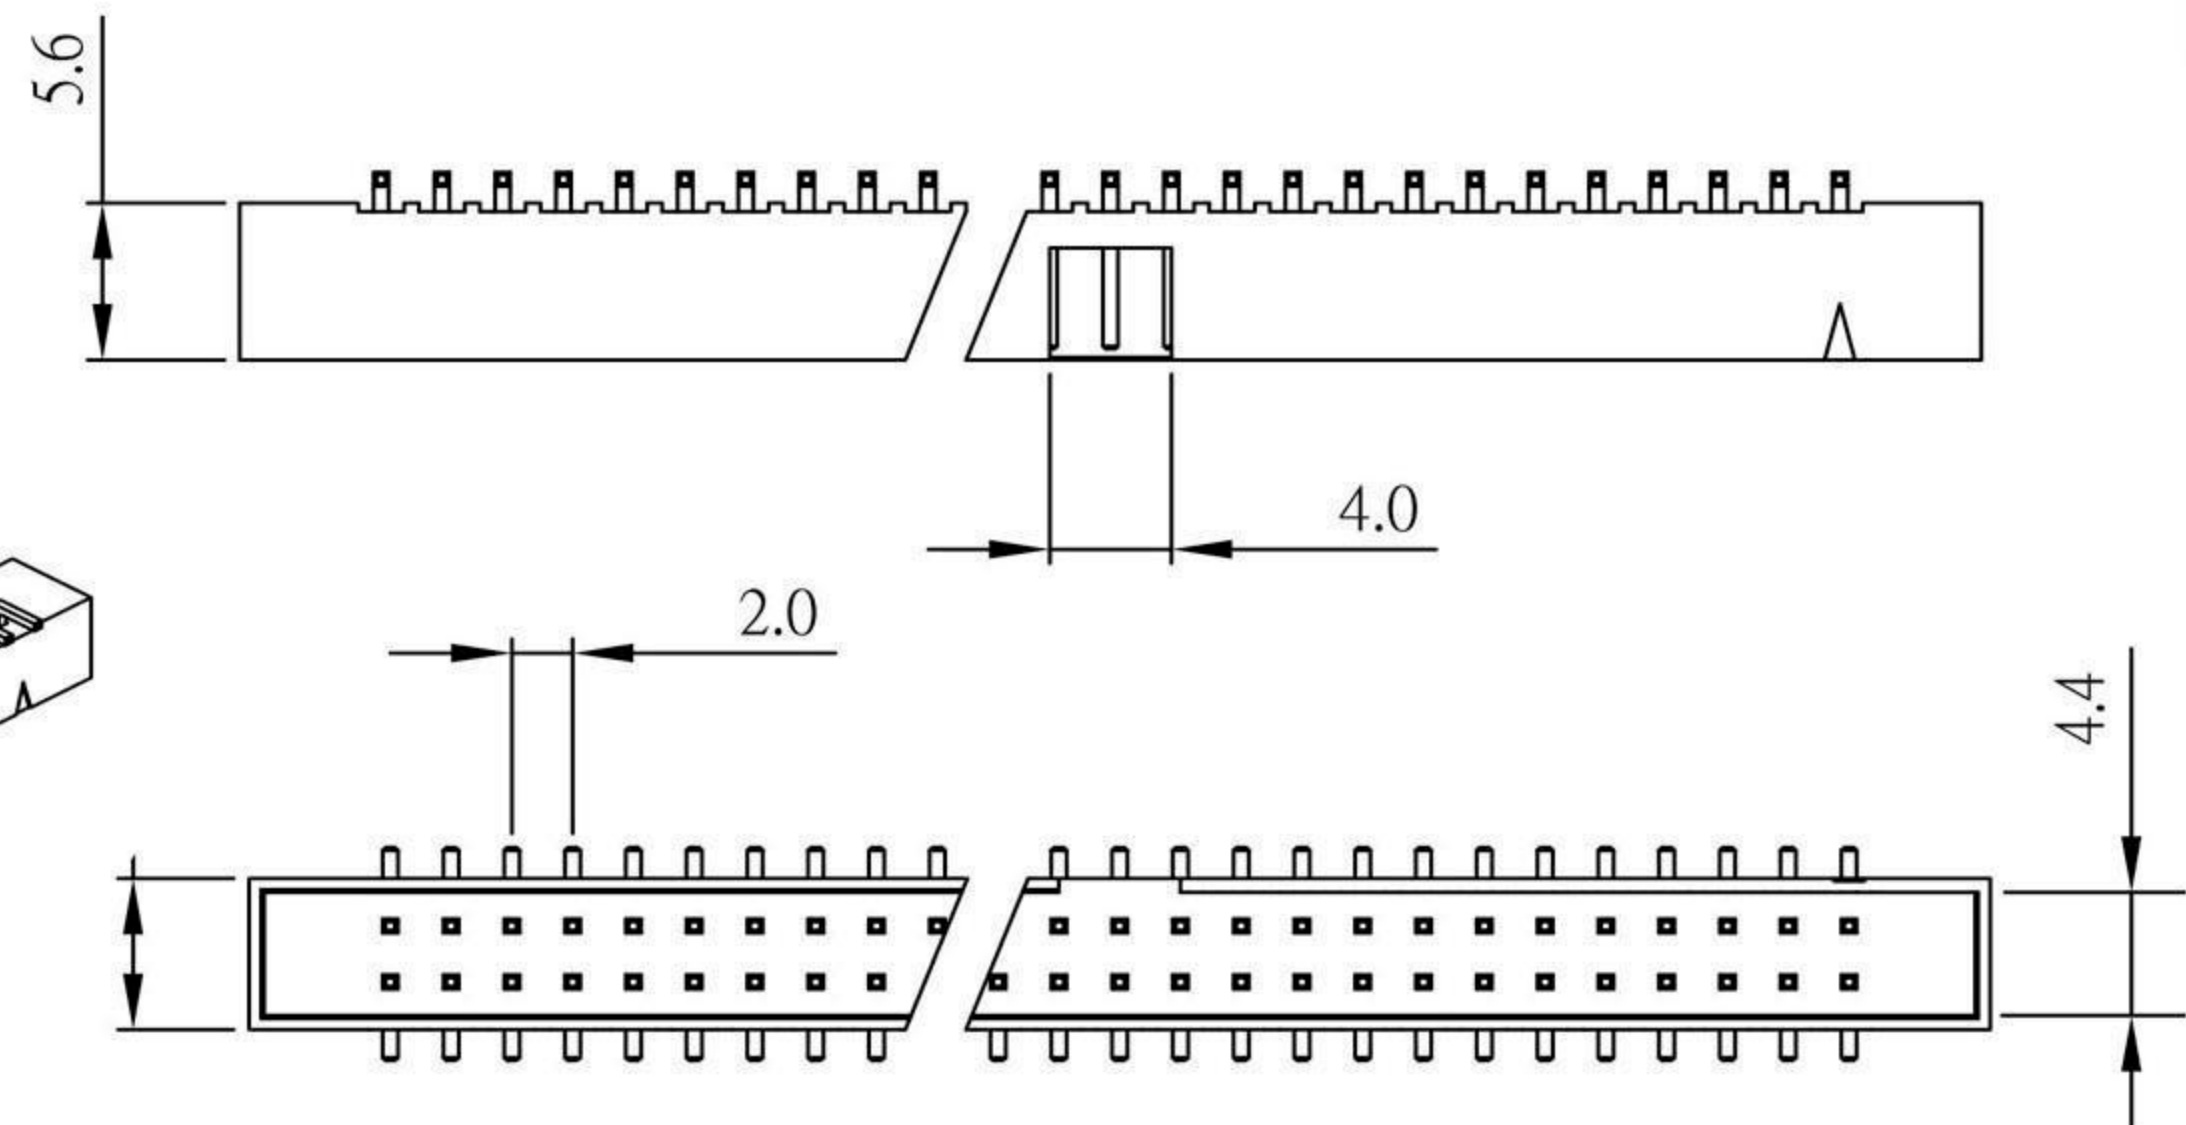

RoHS
Compliant

HSM 玄茂科技股份有限公司
HSUAN MAO TECHNOLOGY CO., LTD.

APPD.
核准



TOLERANCE
容許公差

PART NAME 品名

DWG.
製圖

SCALE
比例

.0 $\pm$ 0.30
.00 $\pm$ 0.20
ANG. $\pm$

BOX HEADER 2.0mm X 2.0mm XXP SMT TYPE
GOLD PLATING BLACK COLOR NYLON-6T ROHS

DATE 制表日
2012/4/3

UNIT
單位

SIZE
紙張尺寸

PART NO.

料號 C9510-XXDNGBX0R

PAGE
張數

REV.
版本

1 OF 1

A