

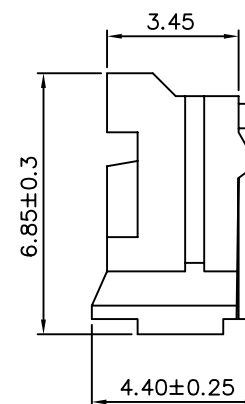
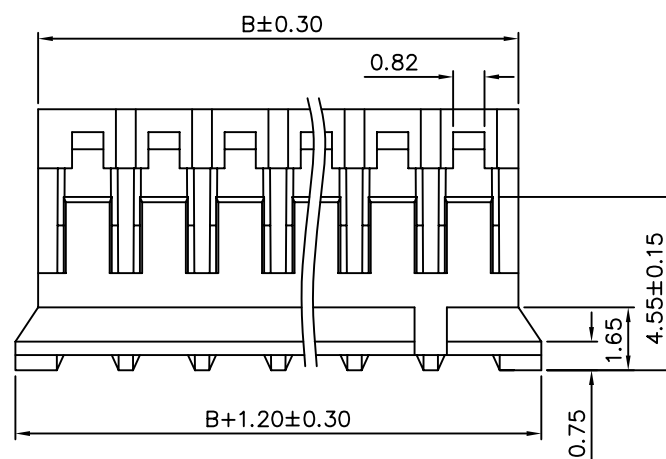


SPECIFICATIONS

Current Rating: 1A AC,DC
 Voltage Rating: 100V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 20 Milliohms Max.
 Insulation Resistance: 1000 Megohms Min.
 Withstanding Voltage: 800V AC/Minute
 Pin Material: Brass/Tin-Plated
 Material: PA66,UL 94V-2

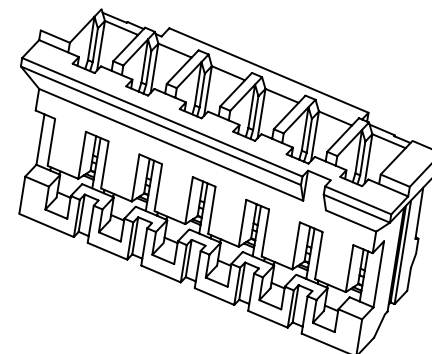

Poles	Dim.A	Dim.B
2	2.00	4.60
3	4.00	6.60
4	6.00	8.60
5	8.00	10.60
6	10.00	12.60
7	12.00	14.60
8	14.00	16.60
9	16.00	18.60
10	18.00	20.60
11	20.00	22.60
12	22.00	24.60
13	24.00	26.60
14	26.00	28.60
15	28.00	30.60
16	30.00	32.60

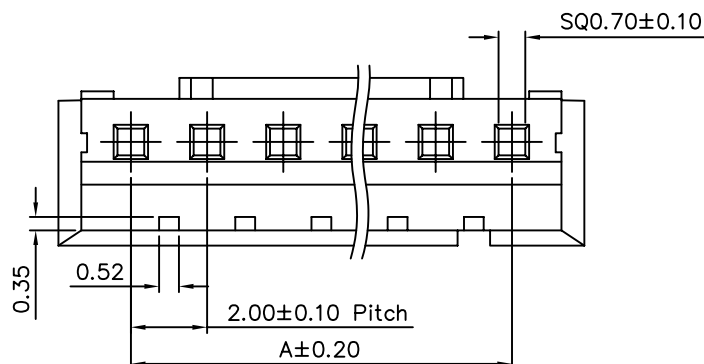

A MEMBER OF AUK GROUP

太聯事業股份有限公司
 AUK CONTRACTORS CO., LTD.

CATEGORY		APPROVED BY MEI		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.38 .XX ±0.25 ANG.					
PART No. PHXXH		CHECKED BY BECKY							
DRAWING No. PHXXH		DRAWING BY TCF							
SCALE	NONE	REV.	A0		UNIT mm		 A0	NEW RELEASE	BECKY
				NO.	REV.	REVISIONS		CHK	DATE