



Connectors > PCB Connectors > Wire-to-Board Connectors > Wire-to-Board Headers & Receptacles



PCB Connector Assembly Type: **PCB Mount Header**  
PCB Mount Orientation: **Vertical**  
Connector System: **Wire-to-Board**  
Number of Positions: **4**  
Centerline (Pitch): **2.54 mm [.1 in]**

Features

Product Type Features

|                                   |                       |
|-----------------------------------|-----------------------|
| PCB Connector Assembly Type       | PCB Mount Header      |
| Connector System                  | Wire-to-Board         |
| Header Type                       | Unshrouded            |
| Sealable                          | No                    |
| Connector & Contact Terminates To | Printed Circuit Board |

Configuration Features

|                       |          |
|-----------------------|----------|
| PCB Mount Orientation | Vertical |
| Number of Positions   | 4        |
| Number of Rows        | 1        |

Contact Features

|                                               |              |
|-----------------------------------------------|--------------|
| Contact Shape                                 | Square       |
| Contact Underplating Material                 | Nickel       |
| PCB Contact Termination Area Plating Material | Tin          |
| Contact Base Material                         | Copper Alloy |



|                                                |                  |
|------------------------------------------------|------------------|
| Contact Mating Area Plating Material           | Tin              |
| Contact Mating Area Plating Material Thickness | 3.81 μm[150 μin] |
| Contact Type                                   | Pin              |
| Contact Current Rating (Max)                   | 5 A              |

Termination Features

|                                             |                       |
|---------------------------------------------|-----------------------|
| Termination Post & Tail Length              | 3.56 mm[.14 in]       |
| Termination Method to Wire & Cable          | Solder                |
| Termination Method to Printed Circuit Board | Through Hole - Solder |

Mechanical Attachment

|                         |               |
|-------------------------|---------------|
| Mating Alignment        | Without       |
| Panel Mount Feature     | Without       |
| Mating Retention Type   | Friction Lock |
| PCB Mount Alignment     | Without       |
| Mating Retention        | With          |
| PCB Mount Retention     | Without       |
| Connector Mounting Type | Board Mount   |

Housing Features

|                    |                |
|--------------------|----------------|
| Centerline (Pitch) | 2.54 mm[.1 in] |
| Housing Color      | Natural        |
| Housing Material   | Polyester - GF |

Dimensions

|                             |                 |
|-----------------------------|-----------------|
| Connector Height            | 7.87 mm[.31 in] |
| PCB Thickness (Recommended) | 1.6 mm[.063 in] |

Usage Conditions

|                             |                            |
|-----------------------------|----------------------------|
| Operating Temperature Range | -55 – 105 °C[-67 – 221 °F] |
|-----------------------------|----------------------------|

Operation/Application

|                     |        |
|---------------------|--------|
| Circuit Application | Signal |
|---------------------|--------|

Industry Standards

|                        |          |
|------------------------|----------|
| UL Flammability Rating | UL 94V-0 |
|------------------------|----------|

Packaging Features

|                    |         |
|--------------------|---------|
| Packaging Quantity | 5000    |
| Packaging Method   | Package |



Product Compliance

For compliance documentation, visit the product page on TE.com>

|                                               |                                                                                                |
|-----------------------------------------------|------------------------------------------------------------------------------------------------|
| EU RoHS Directive 2011/65/EU                  | Compliant                                                                                      |
| EU ELV Directive 2000/53/EC                   | Compliant                                                                                      |
| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold                                                        |
| EU REACH Regulation (EC) No. 1907/2006        | Current ECHA Candidate List: JUL 2019 (201)<br>Candidate List Declared Against: JUL 2019 (201) |
| Halogen Content                               | Not Low Halogen - contains Br or Cl > 900 ppm.                                                 |
| Solder Process Capability                     | Wave solder capable to 265°C                                                                   |

Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulations, TE’s information on SVHC in articles for this part number is still based on the European Chemical Agency (ECHA) ‘Guidance on requirements for substances in articles’(Version: 2, April 2011), applying the 0.1% weight on weight concentration threshold at the finished product level. TE is aware of the European Court of Justice ruling of September 10th, 2015 also known as O5A (Once An Article Always An Article) stating that, in case of ‘complex object’, the threshold for a SVHC must be applied to both the product as a whole and simultaneously to each of the articles forming part of its composition. TE has evaluated this ruling based on the new ECHA “Guidance on requirements for substances in articles” (June 2017, version 4.0) and will be updating its statements accordingly.

Compatible Parts

Standard Rectangular Connectors(36)

Wire-to-Board Connector Housings(1)

Also in the Series | MTA 100

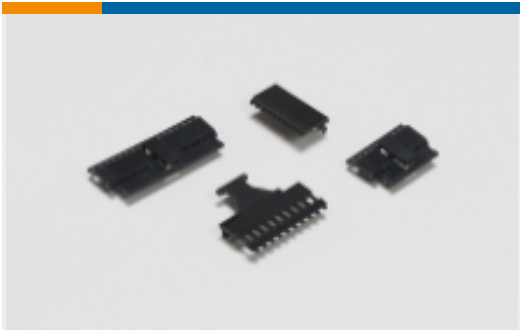

PCB Connector Covers  
(107)



PCB Connector Keying(1)



Standard Rectangular  
Connectors(1730)



Wire-to-Board Connector  
Contacts(18)



Wire-to-Board Headers &  
Receptacles(1207)

Customers Also Bought



TE Part #5103308-1  
A/L LOW PRO HDR 10P  
VERT BLACK



TE Part #3-640440-4  
04P MTA100 CONN ASSY  
22AWG RED




TE Part #3-640441-4  
04P MTA100 CONN ASSY  
WHT




TE Part #292304-1  
STD USB TYPE B, R/A, T/H




TE Part #640456-2  
02P MTA100 HDR ASSY F  
/L SQ STR

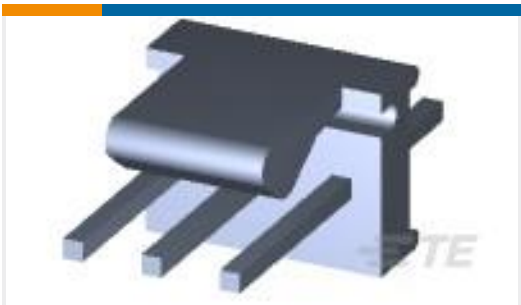


TE Part #640456-3  
03P MTA100 HDR ASSY F  
/L SQ STR

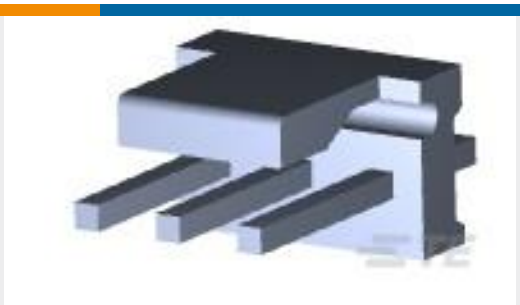


TE Part #640445-3  
03P MTA156 HDR ASSY FL  
/STR SN

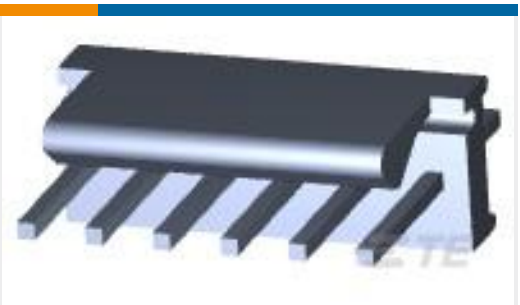

TE Part #640456-6  
06P MTA100 HDR ASSY F  
/L SQ STR

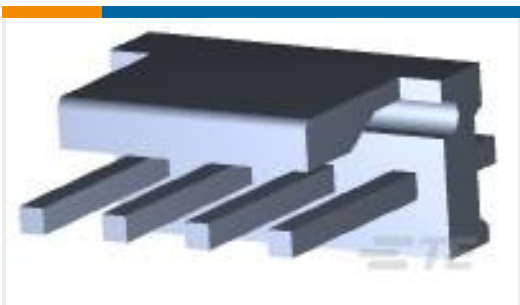

TE Part #640445-4  
04P MTA156 HDR ASSY FL  
/STR SN

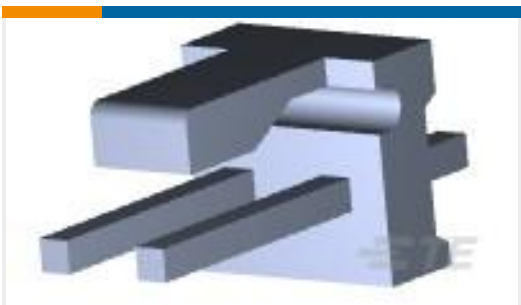

TE Part #640445-2  
02P MTA156 HDR ASSY FL  
/STR SN

Documents



Product Drawings

04P MTA100 HDR ASSY F/L SQ STR

English

CAD Files

Customer View Model

ENG\_CVM\_CVM\_640456-4\_AA.2d\_dxf.zip

English

3D PDF

3D

Customer View Model

ENG\_CVM\_CVM\_640456-4\_AA.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_640456-4\_AA.3d\_stp.zip

English

Datasheets & Catalog Pages

MTA, CST-100 II, SL-156 and AMP Economy Power (EP) Connectors

English

Product Environmental Compliance

MD\_640456-4\_1026201870\_dmtec

English

MD\_640456-4\_1026201870\_dmtec

English

Agency Approvals

CSA Certificate

English