THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 2017
© COPYRIGHT 2016 BY TE CONNECTIVITY ALL RIGHTS RESERVED.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	F	REVISED PER PCN-24-210155	09MAY2024	PS	CB

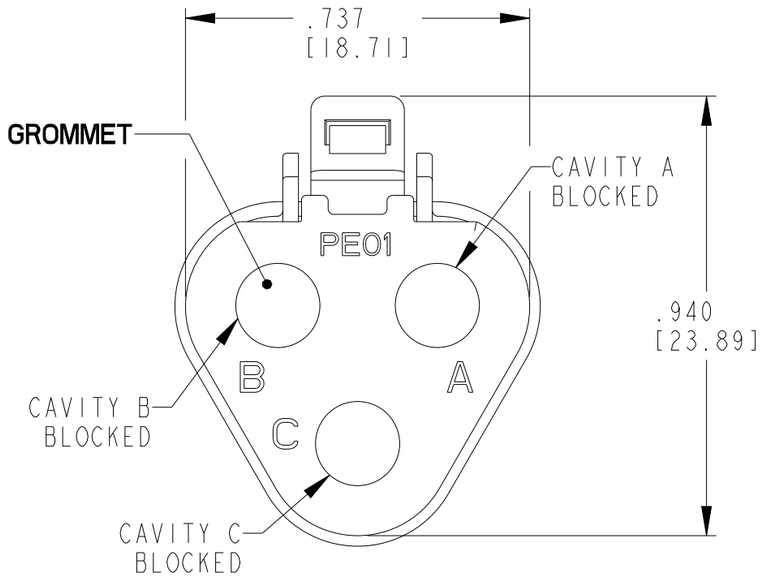

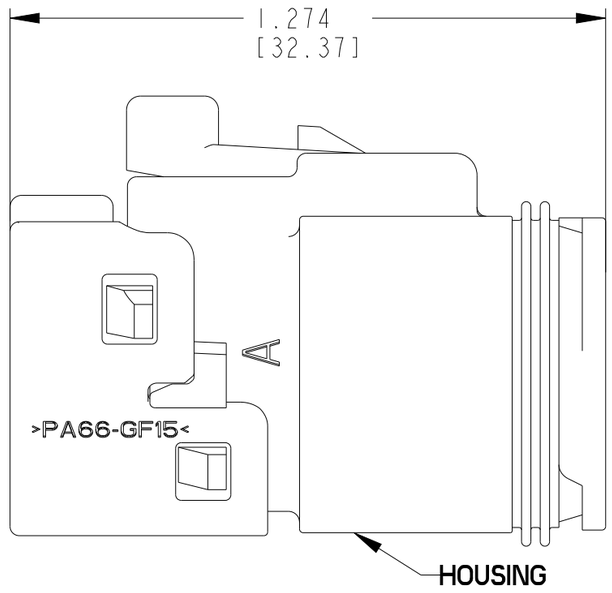

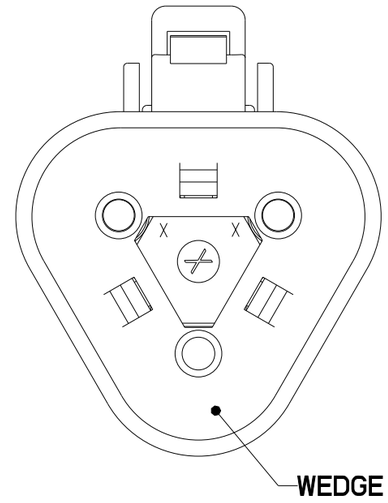

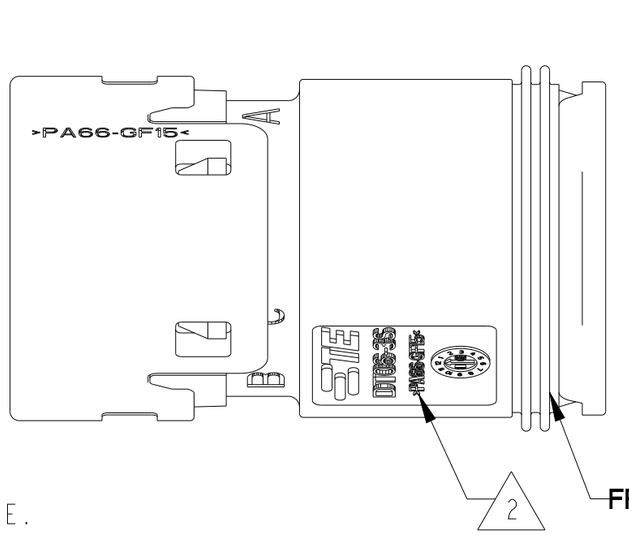

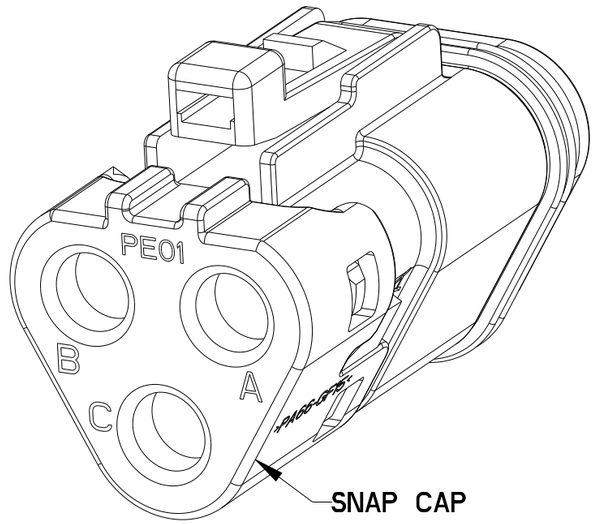

4. RESISTOR CHARACTERISTICS: 120 OHMS±10 PERCENT, .4 WATTS MINIMUM INSERTED INTO CAVITIES A AND B.

3. THIS CONNECTOR CAN PASS THRU A ONE INCH [25.44] HOLE.

△2 MATERIAL: HOUSING/CAP: PA66 GF15, (BLACK)
GROMMET: VMQ (RED-ORANGE)
FRONT SEAL: VMQ (RED-ORANGE)
WEDGE LOCK: PBT GF30 (BLUE)
SOCKET TERMINALS: COPPER ALLOY; GOLD PLATED

1. THIS PLUG MATES WITH DT04-3P-J1939 SERIES CONNECTORS ONLY. CONSULT FACTORY FOR MODIFICATION NUMBERS. SECONDARY WEDGE LOCK W3S-1939-P012 KEYED AND INCLUDED TO PREVENT MISMATING AND MAY NOT MATE WITH ALL 3 WAY DT SERIES RECEPTACLES.

NOTES:

TE INTERNAL PN	DEUTSCH PN	PN REV
DT06-3S-PE01	DT06-3S-PE01	F

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: in [mm]

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±
1 PLC ±
2 PLC ±
3 PLC ±.025 [0.64]
4 PLC ±
ANGLES ±1°

MATERIAL △2

FINISH

DWN T.YOHANNES 23JUL2001
CHK R.MILLIGAN 26JUN2008
APVD S.BEARD 25JUN2008
PRODUCT SPEC 108-15109
APPLICATION SPEC 0425-017-000
WEIGHT 9.20g

TE Connectivity

NAME 3 WAY PLUG WITH TERMINATING RESISTOR PE01 MOD, DT SERIES

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	4AFU8	C-DT06-3S-PE01	

CUSTOMER DRAWING | SCALE 3:1 | SHEET 1 OF 1 | REV F