


SPECIFICATION




Current Rating: 2A AC/DC
Voltage Rating: 100V AC/DC
Temperature Range: -25°C~+85°C
Contact Resistance: 20 Milliohms Max.
Insulation Resistance: 1000 Megaohms Min.
Withstanding Voltage: 800V AC/Minute
⚠ Insulator: PA66(UL94V-0), Nature
Pin: Brass, Tin Plated Over Nickel
RoHS Compliant

- ⚠ 4 1 PH XX D - H
(1) (2) (3) (4)
(1) PH: 2.0mm PH Series
(2) XX: No. Of Position
(3) D: DIP Straight
(4) H: RoHS Compliant

Poles	A	B
2	2.00	6.00
3	4.00	8.00
4	6.00	10.00
5	8.00	12.00
6	10.00	14.00
7	12.00	16.00
8	14.00	18.00
9	16.00	20.00
10	18.00	22.00
11	20.00	24.00
12	22.00	26.00
13	24.00	28.00
14	26.00	30.00
15	28.00	32.00
16	30.00	34.00

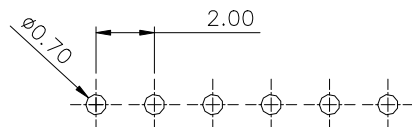

Recommended P.C.B. Layout(Top Side)
P.C.B Thickness=1.20mm
(Tolerance=±0.05)

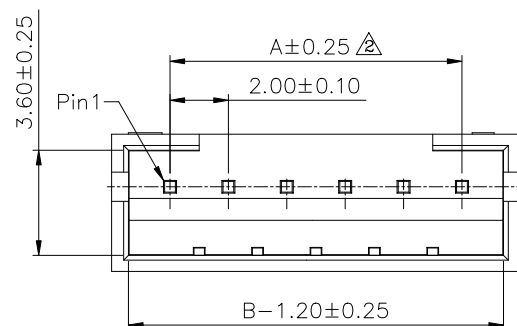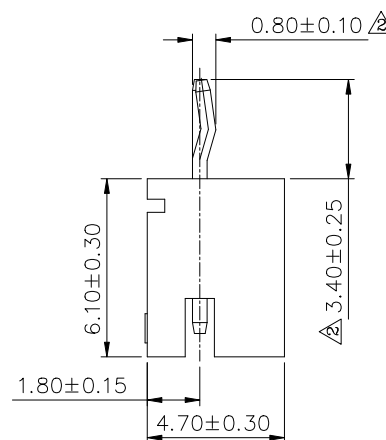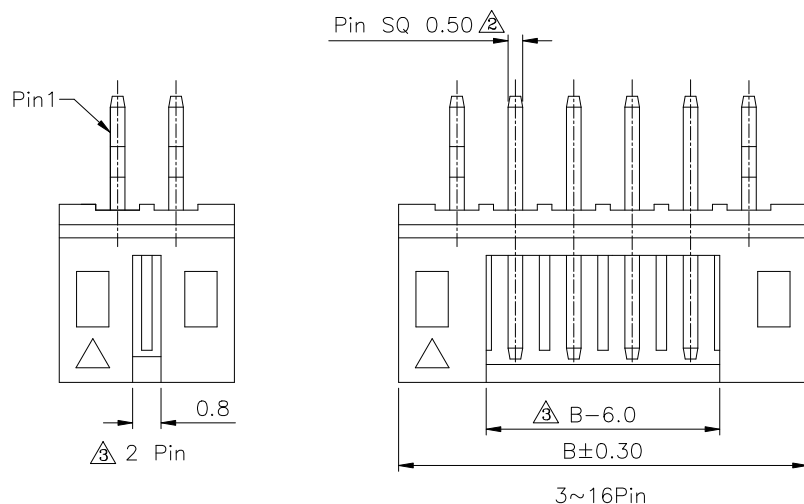

CATEGORY		APPROVED BY	
PART No.		CHECKED BY	
DRAWING No.		DRAWING BY	
SCALE		REV.	

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
.X ±0.25	.X* ±2*
.XX ±0.20	.XX* ±1*
.XXX ±0.10	
UNIT	mm

⚠ 4	A4	Modify P/N Code	HZF	03/01/2016
⚠ 3	A3	Modify Data	HZF	06/10/2010
⚠ 2	A2	Modify Data	HZF	03/11/2010
⚠ 1	A1	Add P/N Order	HZF	04/17/2009
⚠ 0	A0	NEW RELEASE	HZF	10/01/2008
NO. REV.	REVISIONS		CHK	DATE