
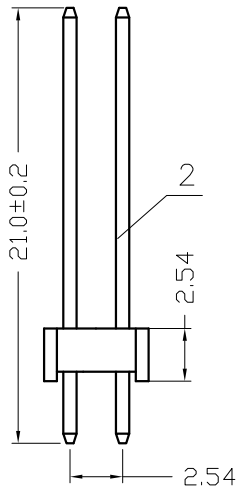
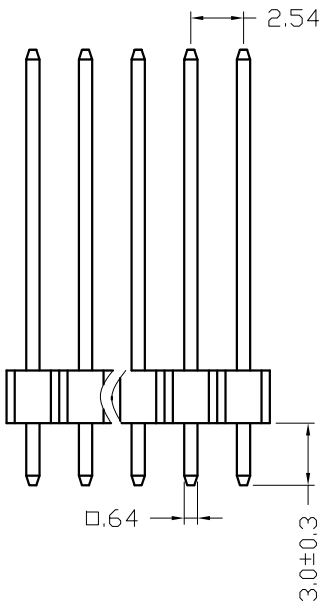


序号/RevNo.	名称/Title	文件编号/File No.
1	塑料件	
2	端子	

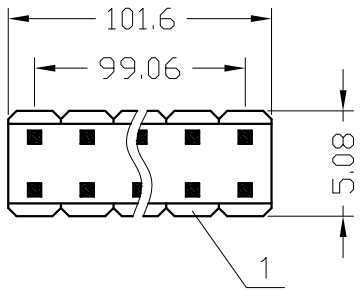

Specifications:
Contact Resistance: 30mΩ max.at DC 100 mA
Insulator Resistance: 1000MΩ min.at DC 500V
Current Rating: 1AMP

Dielectric Withstanding
Voltage: AC 500V For 1 minute
Operating Temperature:-55°C--+105°C
Contact: Brass
Housing: PBT &30% Glass Fiber(UL 94V-0)

- 要求:
- 1. 塑料件无裂痕。
 - 2. 整排端子成一直线，相邻端子之间相互平行。

设计/Designed by	绘图/Drawing by	审核/Checked by	批准/Approved by	未注公差 General Tolerance		
 XINYA ELECTRONIC CO.,LTD		图名/Title	文件编号/File No.		x, ± 0.2 .x ± 0.1 .xx ± 0.05 .xxx ± 0.01	x," ± 2" .x' ± 1" .xx' ± 0.5"
		112-A-DS80G	页序/Sheet			
备注/Remark				单位/Units: mm		