
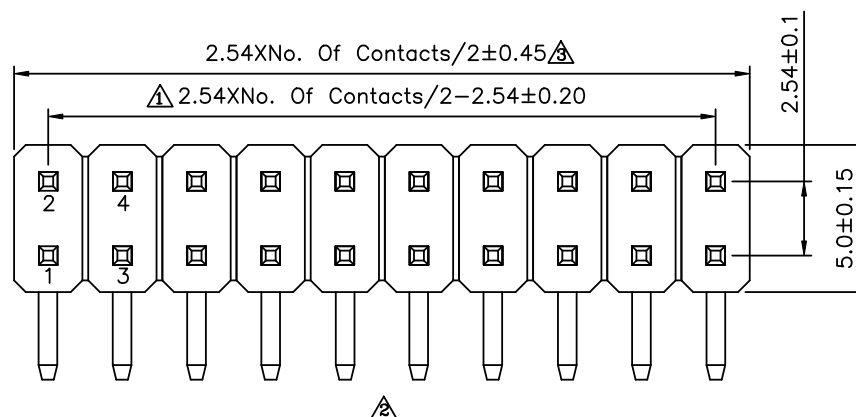
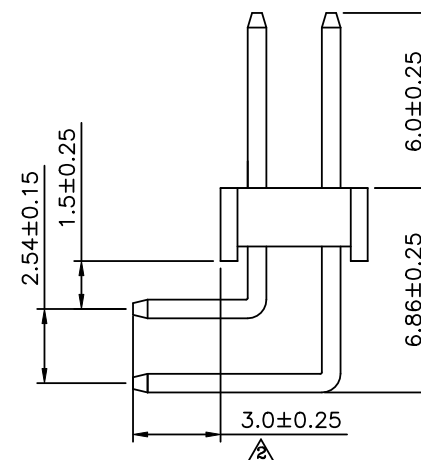


2 Recommended P.C.B. Layout(Top View)
(PCB Board Tolerance ± 0.05)

SPECIFICATION
Current Rating:3 Amp
Withstanding Voltage:1000V AC
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-40°C~+105°C
⚠ Contact:Brass,Gold Flash Over Nickel
Insulator:PBT(UL94V-0),Black
RoHS Compliant


$$\triangle 2 \frac{H}{(1)} \frac{R}{(2)} \frac{2}{(3)} \times \frac{XX}{(4)} - \frac{H}{(5)}$$

- (1) H:2.54mm Pin Header
- (2) R:DIP Right Angle
- (3) 2: Dual Row
- (4) XX: No. Of Position/Per Row
- (5) H: RoHS Compliant

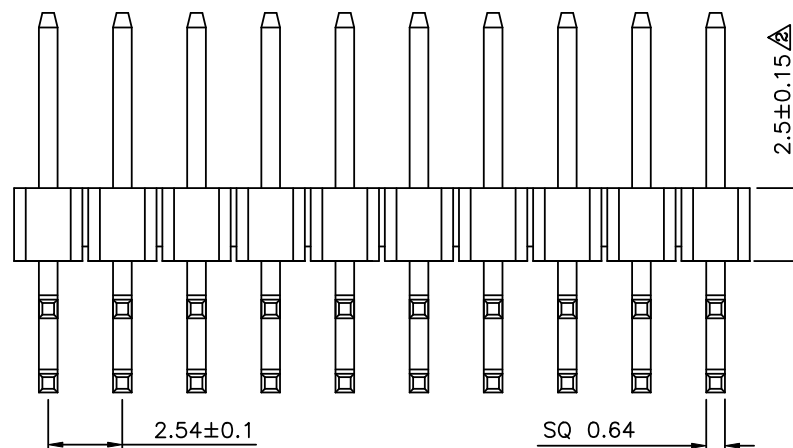

A MEMBER OF AUK GROUP

太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

CATEGORY		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE					
		MEI							
PART No.		CHECKED BY		Δ X. ± 0.25 X.* ± 2 Δ X ± 0.20 X.* ± 1.5 Δ .XX ± 0.15 .XX* ± 1 Δ .XXX ± 0.10 .XXX* ± 0.5	Δ A3	Modify Data		HZF	01/06/2017
HR2XXX-H		HZF			Δ A2	Modify Data		HZF	07/09/2015
DRAWING No.		DRAWING BY		Δ A1 Δ A0	A1	Modify Dim. $A \pm 0.1 \rightarrow A \pm 0.3$		HZF	02/22/2011
HR2XXX-H		HAO			A0	NEW RELEASE		HZF	12/09/2009
SCALE	NONE	REV.	A3	UNIT mm		NO. REV.	REVISIONS	CHK	DATE