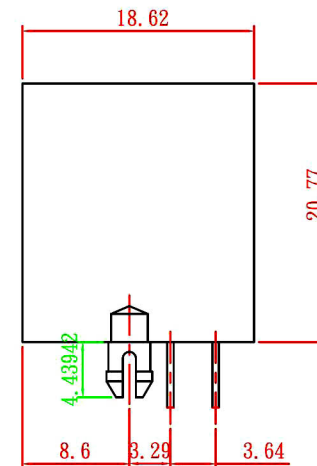
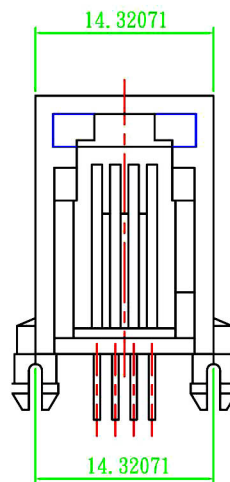
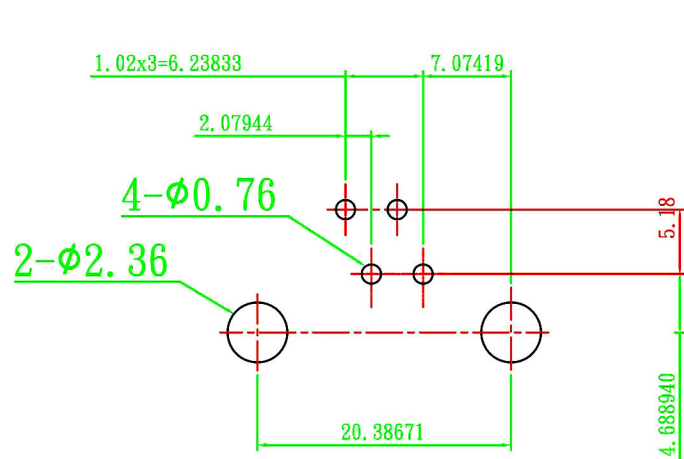


Materials

Housing: Glass Filled Polyester UL94V-0, Black OR GREY

Contact: 0.45mm Diameter Phosphor Bronze Gold
Plating Over Nickel

Electrical Characteristics:

Insulation Resistance: 500MΩ Min.

Contact Resistance: 30mΩ Max.

Withstand Voltage: 1000VAC 1 minute.

Current Rating: 1.5A

General tolerance: ±0.2mm General angle tolerance: ±2°

RoHS
Compliant

HSM 玄茂科技股份有限公司
Hsuan Mao Technology Co., LTD.

APPD.
HELEN

SCALE
参考

TOLERANCE
.0
.00
ANG.

PART NAME 品名
SIDE ENTRY MINI L/P PCB JACK
4P4C W/O PANEL STOP SPLIT FOOT
ROHS

DWG.
ABBY

UNIT
mm

SIZE.
A 4

DATE
2012/12/10

PAGE
1 OF 1

REV.
A

PART NO.
料號 C0059-44ABXX00R