

Features:

- Available in 2 thru 24 circuits
- Material: UL 94V-0 nylon66
- Standard color: Black

Specifications:



- Current rating:

Wire size	# 20	# 22	# 24	# 26	# 28	# 30
Ampere	5 A	5 A	4 A	3 A	2 A	1 A

- Voltage rating: 250V AC(RMS) or DC
- Insulation resistance: 1000M Ω Min.
- Dielectric strength: 1500V AC/minute
- Temperature rise: 30°C Max.
(carry rated current load)

Dimensional Information

Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B
2		4.0	6	6.0	10.0	10	12.0	16.0	14	18.0	22.0	18	24.0	28.0	22	30.0	34.0
4	3.0	7.0	8	9.0	13.0	12	15.0	19.0	16	21.0	25.0	20	27.0	31.0	24	33.0	37.0

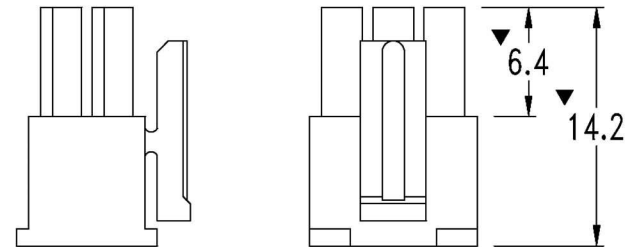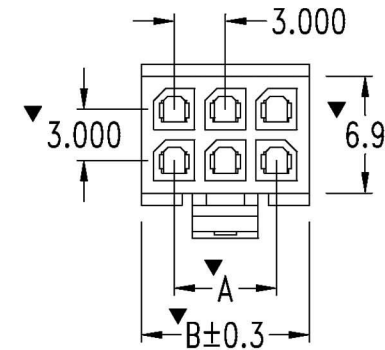

RoHS Compliant		HSM 玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.	
APPD. 核准		TOLERANCE 容許公差 .000 ± 0.05 (mm) .00 ± 0.15 (mm) .0 ± 0.25 (mm)	PART NAME 品名 MICRO-FIT 3.0 MALE HOUSING 2XXXP BLACK INSULATOR ROHS
DWG. 製圖	Hedy	SCALE 比例 參考	UNIT 單位 MM
DATE 制表日 2012/11/20	PAGE 張數 1 / 1	SIZE 紙張尺寸 A 4	REV. 版次 A
		PART NO. 料號 H4130-XXPDB000R	