



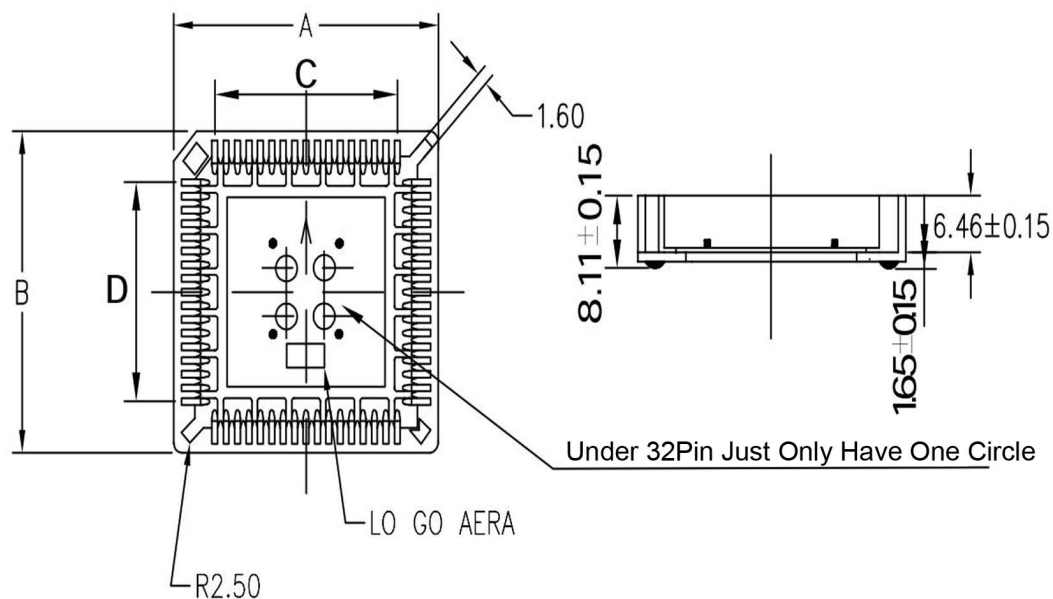

Insulator Material:PBT &30%Class Fiber(UL 94V-0)
 Contact Resistance:30mΩ MAX at DC 100MA
 Current Rating:1 AMP
 Dielectric Withstanding Voltage:AC 500V For 1 minute
 Temperature Rating:-55°C ~ +85°C
 Contact Material:Phosphor Bronze

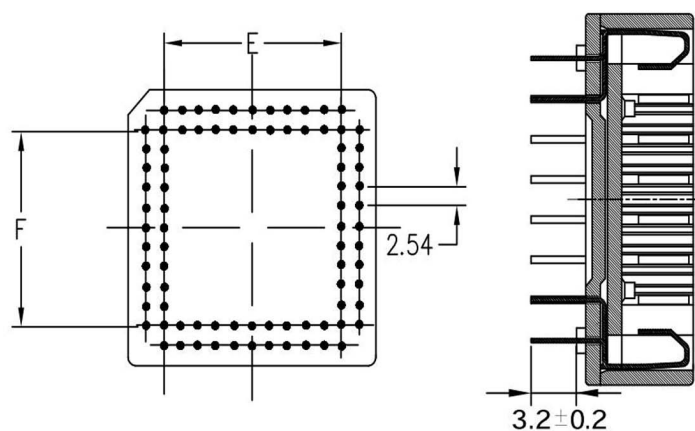

NO OF CONTACT	A±0.15	B±0.15	C±0.15	D±0.15	E±0.15	F±0.15
20PBT	15.50	15.50	5.08	5.08	5.08	5.08
28PBT	18.04	18.04	7.62	7.62	7.62	7.62
32PBT	18.04	20.54	7.62	10.16	7.62	10.16
44PBT	23.48	23.48	12.70	12.70	12.70	12.70
52PBT	25.88	25.88	15.24	15.24	15.24	15.24
68PBT	31.66	31.66	20.32	20.32	20.32	20.32
84PBT	36.66	36.66	25.40	25.40	25.40	25.40

RoHS
Compliant

HSM 玄茂科技股份有限公司
HSUAN MAO TECHNOLOGY CO., LTD.

APPD.
核准
Betty
DWG.
製圖
Betty
DATE 制表日
2012/12/13

SCALE
比例
參考
UNIT
單位
MM
PAGE
張數
1 OF 1

TOLERANCE
容許公差
.0 ± 0.30
.00 ± 0.20
ANG. ± 3°
SIZE
紙張尺寸
A 4
REV.
版次
A

PART NAME 品名
PLCC SOCKET DIP TYPE 2.54mm XXP
TIN PLATING PBT MATERIAL
BLACK COLOR ROHS
PART NO.
料號 C0101-XXTB0000R