



SPECIFICATION

Current Rating: 1 Amp
 Dielectric Withstand Voltage: AC 500V For 1 Minute
 Temperature Range: -55°C To +85°C
 Contact Resistance: 30 Milliohms Max. At DC 100mA
 Contact: Phosphor Bronze, Tin Plated Over Nickel
 Insulator: PBT+30%G.F.(UL94V-0), Black
 RoHS Compliant

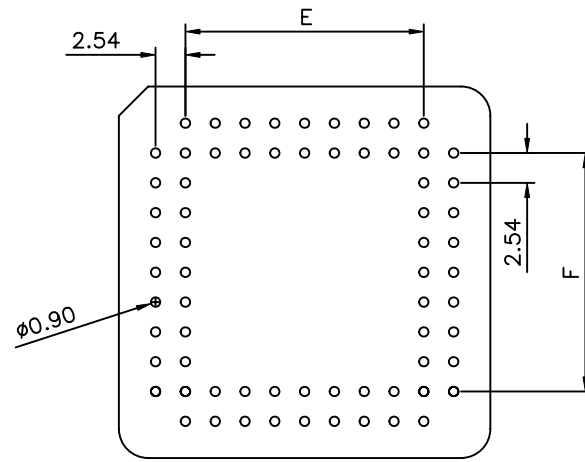

PCB Layout

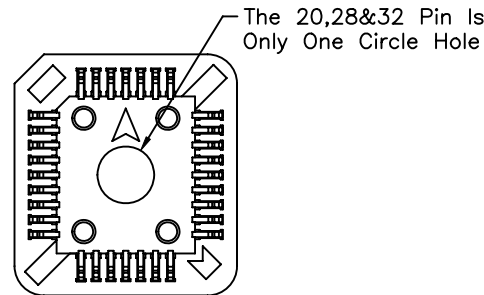

32 Pin

PL D XX-H





(1)(2)(3)(4)

(1) PL: 1.27mm PLCC Socket

(2) D: DIP Straight

(3) XX: No. Of Position

(4) H: RoHS Compliant

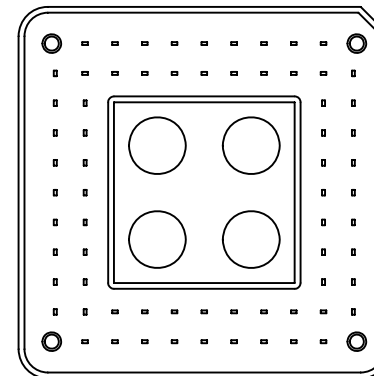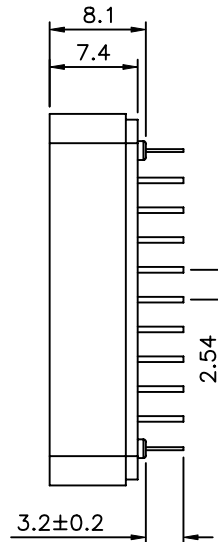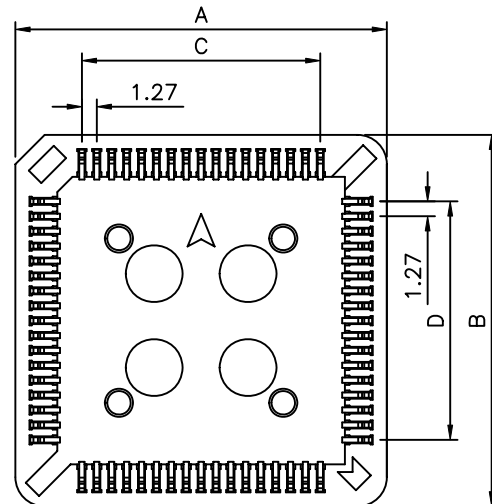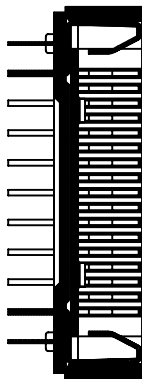

Pin	A±0.15	B±0.15	C±0.15	D±0.15	E±0.15	F±0.15
20	15.50	15.50	5.08	5.08	5.08	5.08
28	18.04	18.04	7.62	7.62	7.62	7.62
32	18.04	20.54	7.62	10.16	7.62	10.16
44	23.48	23.48	12.70	12.70	12.70	12.70
52	25.88	25.88	15.24	15.24	15.24	15.24
68	31.66	31.66	20.32	20.32	20.32	20.32
84	36.66	36.66	25.40	25.40	25.40	25.40



A MEMBER OF AUK GROUP

太聯事業股份有限公司
 AUK CONTRACTORS CO., LTD.

CATEGORY	APPROVED BY	MEI
PART No. PLDXX-H	CHECKED BY	HZF
DRAWING No. PLDXX-H	DRAWING BY	LXX
SCALE NONE	REV.	BO

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
.X ±0.38
.XX ±0.25
ANG.
UNIT mm

△ BO	NEW RELEASE	HZF	08/25/2010
NO. REV.	REVISIONS	CHK	DATE