

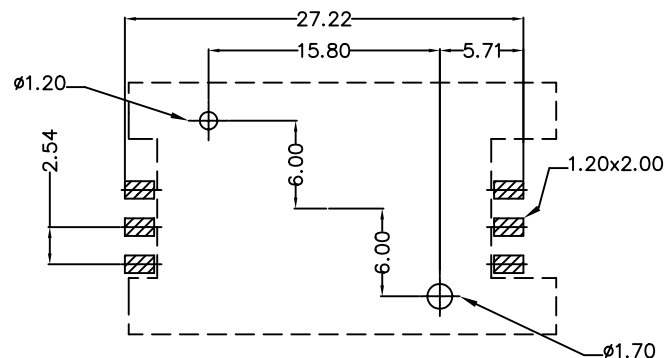

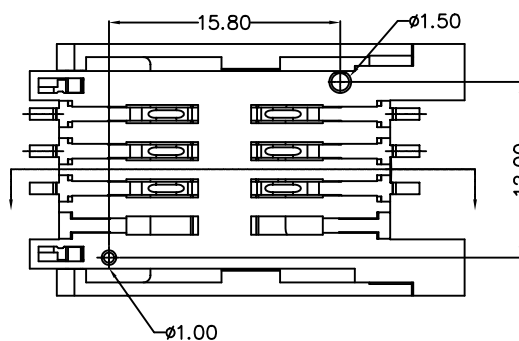
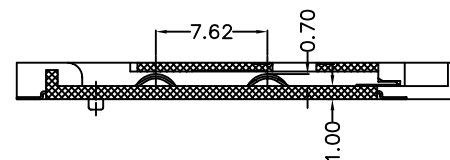


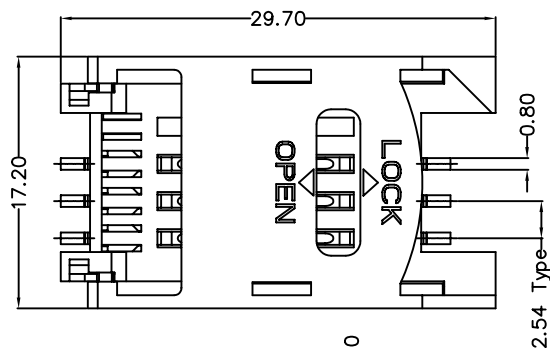

(.XX±0.05)

REFERENCE PCB LAYOUT

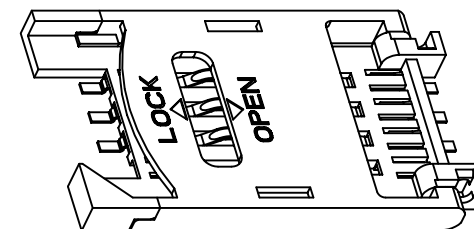

SPECIFICATION

Current Rating: 0.5A Max.

Dielectric Withstanding Voltage: 500V AC R.M.S. For 1 Minute

Insulation Resistance: 1000 Megohms Min. At DC 500V

Contact Resistance: 30 milliohms Max.

Operation Temperature: -25°C To +85°C

Max. Processing temperature: 230°C For 30~60 Seconds

IR Reflow: 230°C, 15 Sec Max.

Durability: 5000 Cycles

Housing: LCP(UL94 V-0)

Terminal: Phosphor Bronze, Gold Flash On Contact Area,

Tin Plating On Solder Tail.