

# SS12 THRU S100

## SURFACE MOUNT SCHOTTKY BARRIER RECTIFIER

**REVERSE VOLTAGE:** 20 to 100 VOLTS

**FORWARD CURRENT:** 1.0 AMPERE



### FEATURES

- Plastic package has Underwriters Laboratory Flammability Classification 94V-O
- For surface mounted applications
- High current capacity
- Built-in strain relief
- Low profile package
- Metal to silicon rectifier, majority carrier conduction
- High surge capacity
- Low power loss, high efficiency
- For use in low voltage high frequency inverters, free wheeling, and polarity protection applications
- High temperature soldering : 260°C /10 seconds at terminals

### MECHANICAL DATA

Case: Molded plastic, DO-214AC(SMA)


Terminals: Solder plated, solderable per MIL-STD-750, method 2026 guaranteed

Polarity: Color band denotes cathode end

Packaging: 12mm tape per EIA STD RS-481

Weight: 0.002 ounce, 0.064 gram

### DO-214AC(SMA)

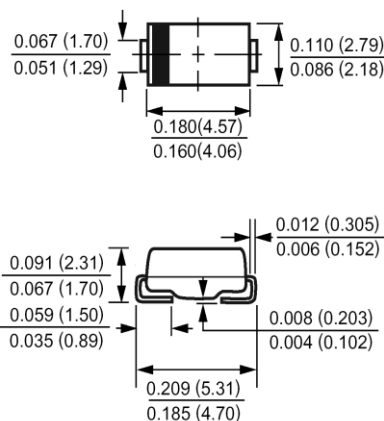

### Dimensions in inches and (millimeters)

### Maximum Ratings and Electrical Characteristics

Ratings at 25 °C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%.

	Symbols	SS12	SS13	SS14	SS15	SS16	SS18	SS19	S100	Units
Maximum Recurrent Peak Reverse Voltage	V <sub>RRM</sub>	20	30	40	50	60	80	90	100	Volts
Maximum RMS Voltage	V <sub>RMS</sub>	14	21	28	35	42	56	63	70	Volts
Maximum DC Blocking Voltage	V <sub>DC</sub>	20	30	40	50	60	80	90	100	Volts
Maximum Average Forward Rectified Current at T <sub>L</sub> (See Fig. 1)	I <sub>(AV)</sub>	1.0								Amp
Peak Forward Surge Current, 8.3ms single half-sine-wave superimposed on rated load (JEDEC method)	I <sub>FSM</sub>	30								Amp
Maximum Forward Voltage at 1.0A (Note 1)	V <sub>F</sub>	0.50			0.70		0.85			Volts
Maximum Reverse Current           at T <sub>A</sub> =25 at Rated DC Blocking Voltage       T <sub>A</sub> =100	I <sub>R</sub>	0.5 20								mAmp
Typical Thermal Resistance (Note 2)	R <sub>θJA</sub>	88								/W
	R <sub>θJL</sub>	28								
Operating Junction Temperature Range	T <sub>J</sub>	-55 to +125								
Storage Temperature Range	T <sub>stg</sub>	-55 to +150								

### NOTES:

1- Pulse test: 300μs pulse width, 1% duty cycle

2- P.C.B. mounted with 0.2 x 0.2" (5.0 x 5.0mm) Copper Pad Areas

# SS12 THRU S100

## SURFACE MOUNT SCHOTTKY BARRIER RECTIFIER



### RATINGS AND CHARACTERISTIC CURVES

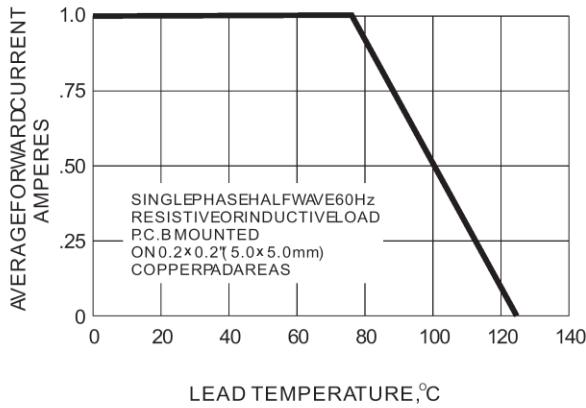


Fig.1-FORWARD CURRENT DERATING CURVE

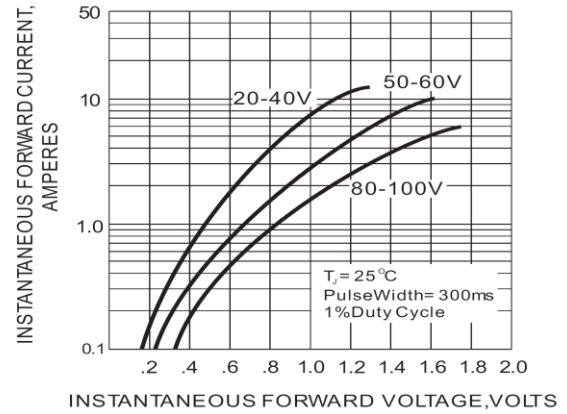


Fig.2-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTIC

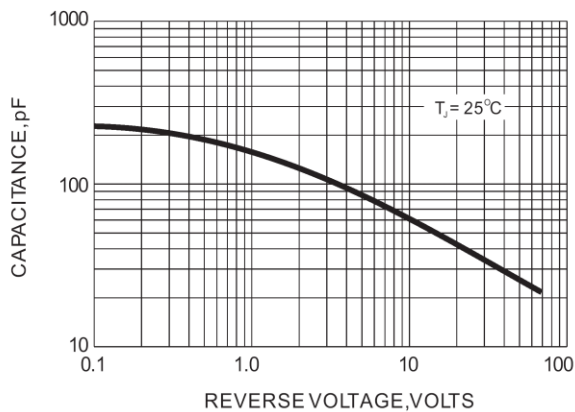


Fig.3-TYPICAL JUNCTION CAPACITANCE

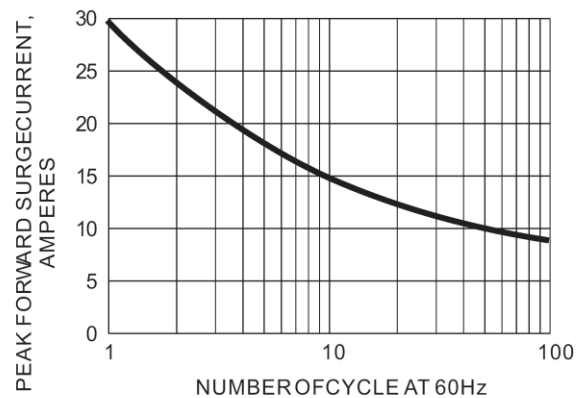


Fig.4-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT