



**DC COMPONENTS CO., LTD.**

RECTIFIER SPECIALISTS

**DB151S  
THRU  
DB157S**

**TECHNICAL SPECIFICATIONS OF SINGLE-PHASE SURFACE MOUNT BRIDGE RECTIFIER**

**VOLTAGE RANGE - 50 to 1000 Volts**

**CURRENT - 1.5 Ampere**


**FEATURES**

- \* Surge overload rating - 50 Amperes peak
- \* Ideal for printed circuit board
- \* Reliable low cost construction
- \* Glass passivated junction

**MECHANICAL DATA**

- \* Case: Molded plastic
- \* Epoxy: UL 94V-0 rate flame retardant
- \* Terminals: MIL-STD-202E, Method 208 guaranteed
- \* Polarity: Symbols molded or marked on body
- \* Mounting position: Any
- \* Weight: 0.38 gram

**DB-1S**

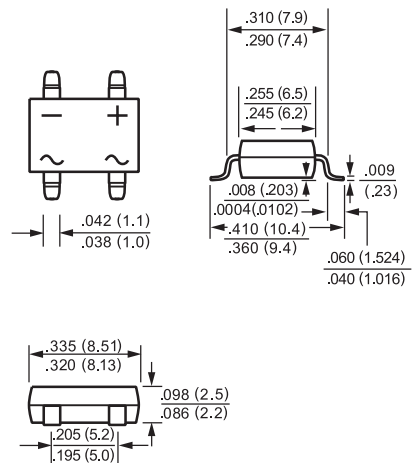

Dimensions in inches and (millimeters)

**MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS**

Ratings at 25 °C ambient temperature unless otherwise specified.  
Single phase, half wave, 60 Hz, resistive or inductive load.  
For capacitive load, derate current by 20%.

|   |              | SYMBOL  | DB151S       | DB152S | DB153S | DB154S | DB155S | DB156S | DB157S | UNITS |
|---|--------------|---------|--------------|--------|--------|--------|--------|--------|--------|-------|
| Maximum Recurrent Peak Reverse Voltage  |              | VRRM    | 50           | 100    | 200    | 400    | 600    | 800    | 1000   | Volts |
| Maximum RMS Bridge Input Voltage  |              | VRMS    | 35           | 70     | 140    | 280    | 420    | 560    | 700    | Volts |
| Maximum DC Blocking Voltage   |              | VDC     | 50           | 100    | 200    | 400    | 600    | 800    | 1000   | Volts |
| Maximum Average Forward Output Current at TA = 40°C   |              | Io      | 1.5          |        |        |        |        |        |        | Amps  |
| Peak Forward Surge Current 8.3 ms single half sine-wave superimposed on rated load (JEDEC Method) |              | IFSM    | 50           |        |        |        |        |        |        | Amps  |
| Maximum Forward Voltage Drop per Bridge Element at 1.0A DC  |              | VF      | 1.1          |        |        |        |        |        |        | Volts |
| Maximum DC Reverse Current at rated   | @ TA = 25°C  | IR      | 10           |        |        |        |        |        |        | uAmps |
| DC Blocking Voltage per element   | @ TA = 125°C |         | 500          |        |        |        |        |        |        |       |
| I²t Rating for Fusing (t<8.3ms)   |              | I²t     | 10           |        |        |        |        |        |        | A²Sec |
| Typical Junction Capacitance ( Note1)   |              | CJ      | 25           |        |        |        |        |        |        | pF    |
| Typical Thermal Resistance (Note 2)   |              | RθJA    | 40           |        |        |        |        |        |        | °C/W  |
| Operating and Storage Temperature Range   |              | TJ,TSTG | -55 to + 150 |        |        |        |        |        |        | °C    |

NOTES : 1.Measured at 1 MHz and applied reverse voltage of 4.0 volts

2. Thermal Resistance from Junction to Ambient and from junction to lead mounted on P.C.B. with 0.5 x 0.5" (13x13mm) copper pads.

RATING AND CHARACTERISTIC CURVES ( DB151S THRU DB157S )

FIG. 1 - MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

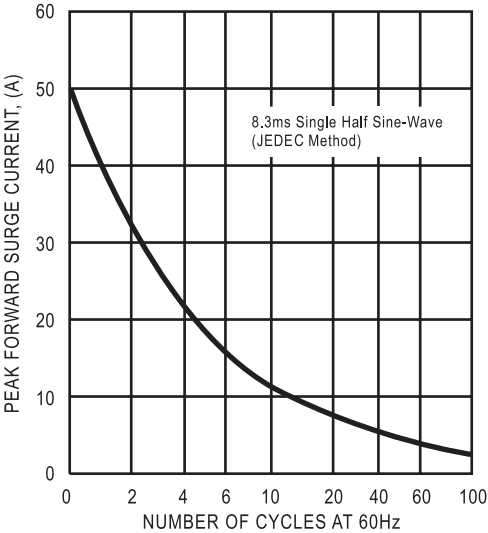


FIG. 2 - TYPICAL FORWARD CURRENT DERATING CURVE

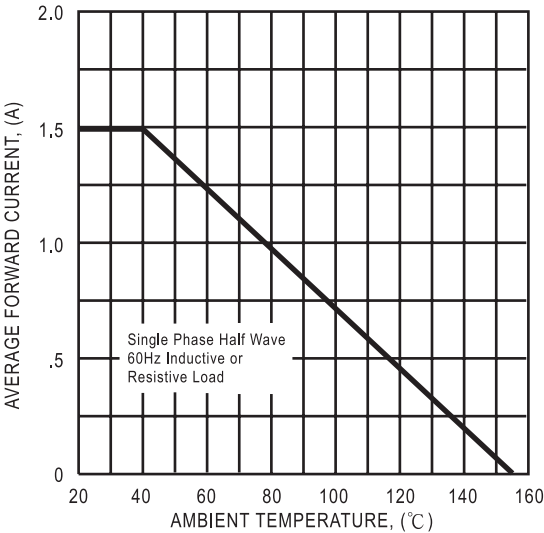


FIG. 3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

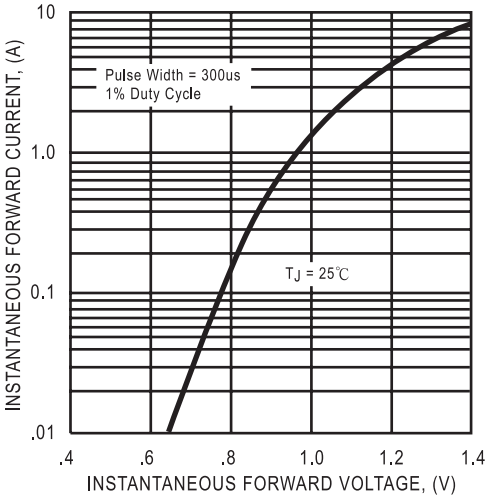


FIG. 4 - TYPICAL REVERSE CHARACTERISTICS

