

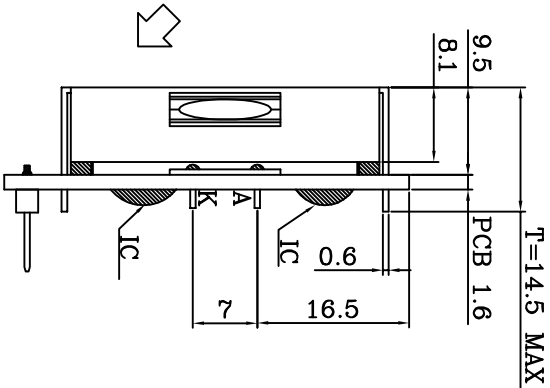
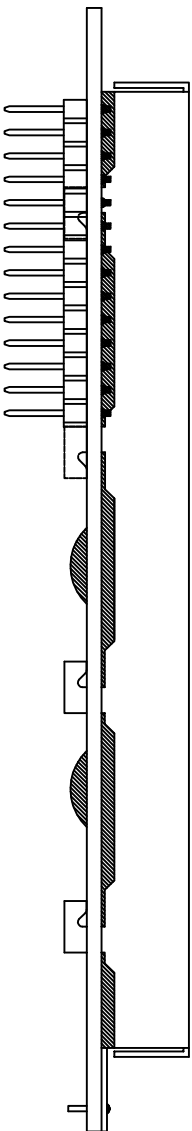


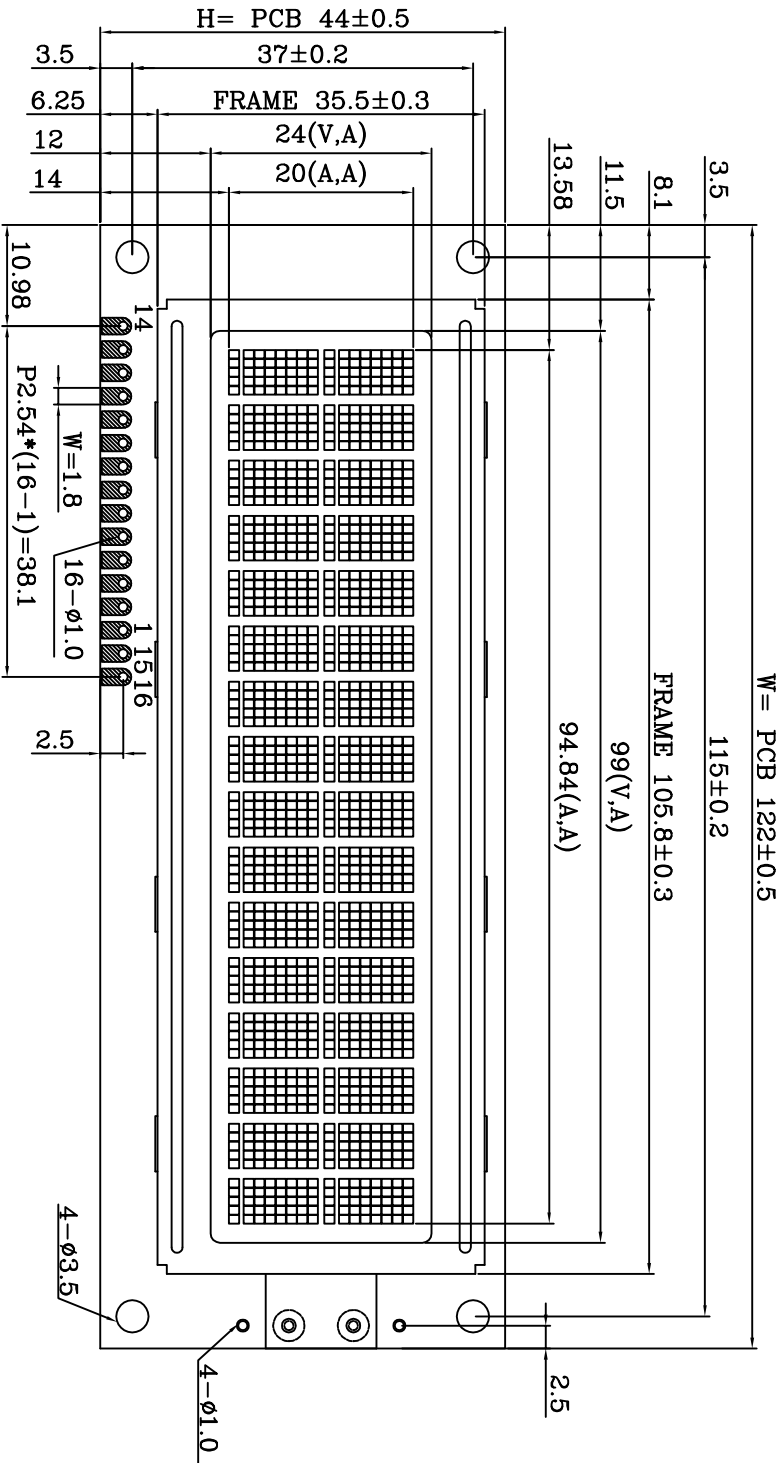

NO	NAME
1	VSS
2	VDD
3	V0
4	RS
5	R/W
6	E
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	A(+5V)
16	K(-5V)



NOTES:

1. DRIVE METHOD: 1/16DUTY, 1/5BIAS,VOP5.0V.
2. VIEWING ANGLE: 12 O'CLOCK.
3. DISPLAY TYPE: STN(Y/G), TRANSPARENT/POSITIVE.
4. OPERATING TEMP: -20 TO 70°C.
5. STORAGE TEMP: -30 TO 80°C.
6. CONNECTION: ZEBRA. 大片在上
7. IC:SPIC780D-02(1pcs),SPIC100A(1pcs).
8. BACK LIGHT:YELLOW&GREEN(底部發光/4.05V,If=260mA,100cd/m2,52顆燈)
9. NOT DIMENSION TOLERANCES IS ±0.3.

日期	版本	修改內容	CUSTOMER		DATE	SCALE	DATE	TITLE	
			DWN	EVA	2006.10.25	UNIT		MD	DRAWING
			CHKD		DATE	mm			
			APVD		DATE			MODEL	
GI FAR TECHNOLOGY CO.,LTD								GFC016002B006	
								PAGE	1/1