
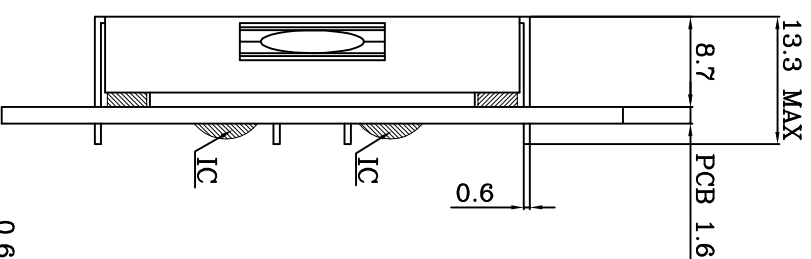
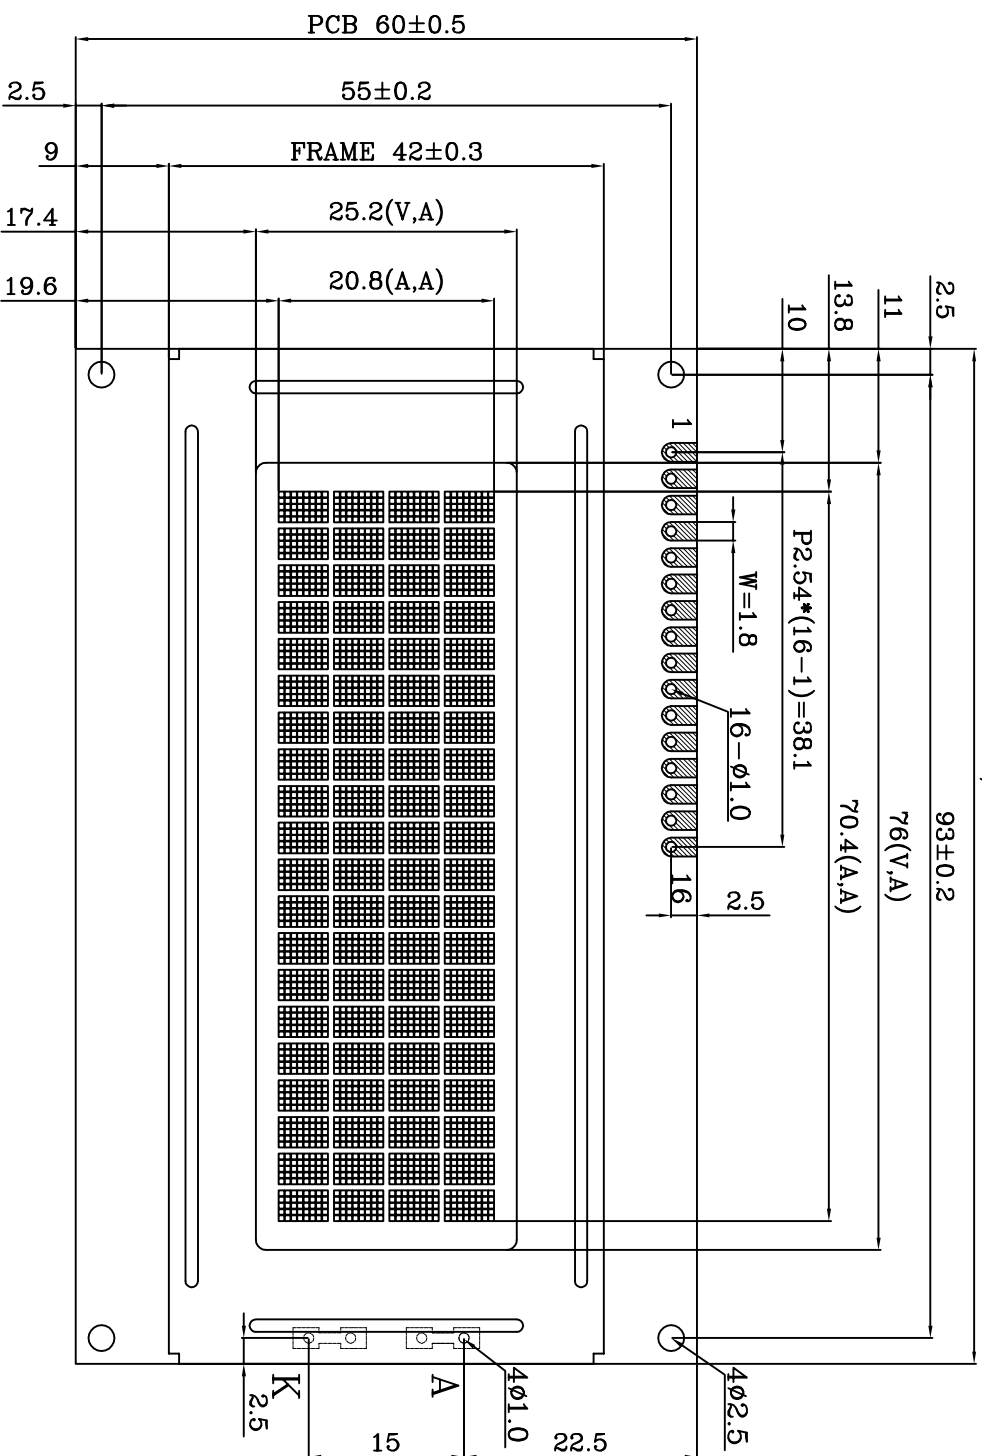


PCB/F_{FRAME} 98±0.5

PIN	NAME
1	VSS
2	VDD
3	VO
4	RS
5	R/w
6	E
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	A
16	K



DOT SIZE

- NOTES:
1. DRIVE METHOD: 1/16DUTY, 1/5BIAS,VDD 5.0V, VOP 4.5V,64 HZ.
 2. VIEWING ANGLE: 6 0'CLOCK.
 3. DISPLAY TYPE:STN(Y-G),TRANSPARENT/POSITIVE.
 4. OPERATING TEMP: -20 TO 70°C.
 5. STORAGE TEMP: -30 TO 80°C.
 6. CONNECTION: ZEBRA.
 7. BACKLIGHT:YELLOW&GREEN/底部發光(4.2V,1f=260mA).
 8. CONTROLLER IC:SPLC780D-003A(1PCS),SPLC063(2PCS).
 9. NOT DIMENSION TOLERANCES IS ±0.3.

日期版本	修改内容	CUSTOMER		DATE	
		DWN	I V Y	DATE	2005.12.20
		CHKD		DATE	
		APVD		DATE	
		GI FAR TECHNOLOGY CO.,LTD		TITLE	
				MD DRAWING	
				MODEL	
				GFC020004A001	
				PAGE	
				1/1	