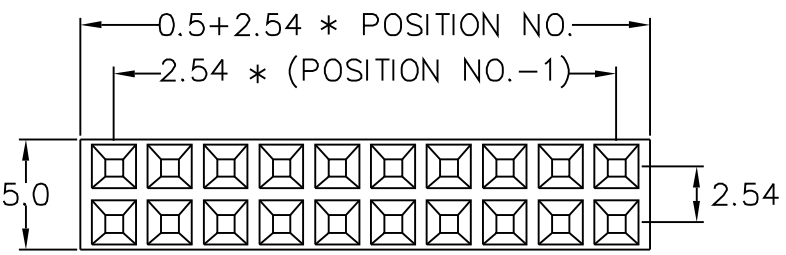
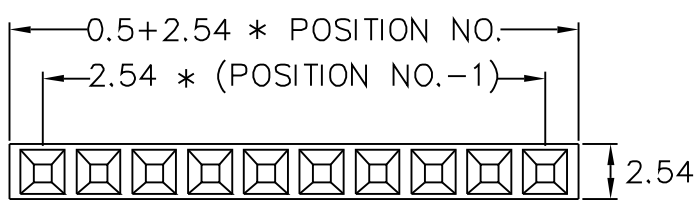
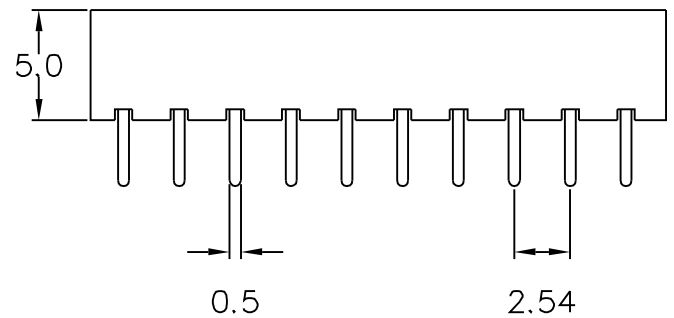



	1	2	3	4	5	6	7	8																	
A									A																
B									B																
C									C																
D									D																
E									E																
F	ORDER INFORMATION								F																
G	<table border="0"> <tr> <td>C2823-</td> <td> Contact No. 80 </td> <td> Row Type B </td> <td> Contact Type S </td> <td> Contact Plating G </td> <td> Insulator Height H </td> <td> 0 </td> <td> 0 </td> </tr> <tr> <td></td> <td>02(1x2)~40(1x40) 04(2x2)~80(2x40)</td> <td>A: Single Row B: Dual Row</td> <td>S: Straight</td> <td>T: Tin S: Selective Gold G: Gold Flash</td> <td>H: 5.0mm</td> <td>Fill It With "0"</td> <td>Fill It With "0"</td> </tr> </table>								C2823-	Contact No. 80	Row Type B	Contact Type S	Contact Plating G	Insulator Height H	0	0		02(1x2)~40(1x40) 04(2x2)~80(2x40)	A: Single Row B: Dual Row	S: Straight	T: Tin S: Selective Gold G: Gold Flash	H: 5.0mm	Fill It With "0"	Fill It With "0"	G
C2823-	Contact No. 80	Row Type B	Contact Type S	Contact Plating G	Insulator Height H	0	0																		
	02(1x2)~40(1x40) 04(2x2)~80(2x40)	A: Single Row B: Dual Row	S: Straight	T: Tin S: Selective Gold G: Gold Flash	H: 5.0mm	Fill It With "0"	Fill It With "0"																		
H	玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.			UNIT MM		SCALE 2 : 1		PART NAME P:2.54 FEMALE HEADER H:5.0MM		H															
	制表日: 2002/04/22		DRAWING. <i>Helvin</i>	APPROVED <i>JANA</i>	APPD.	CKD.	TOLERANCE ± 0.5	PART NO. C2823-XXXSXH00	REV. A																
	1	2	3	4	5	6	7	8																	