


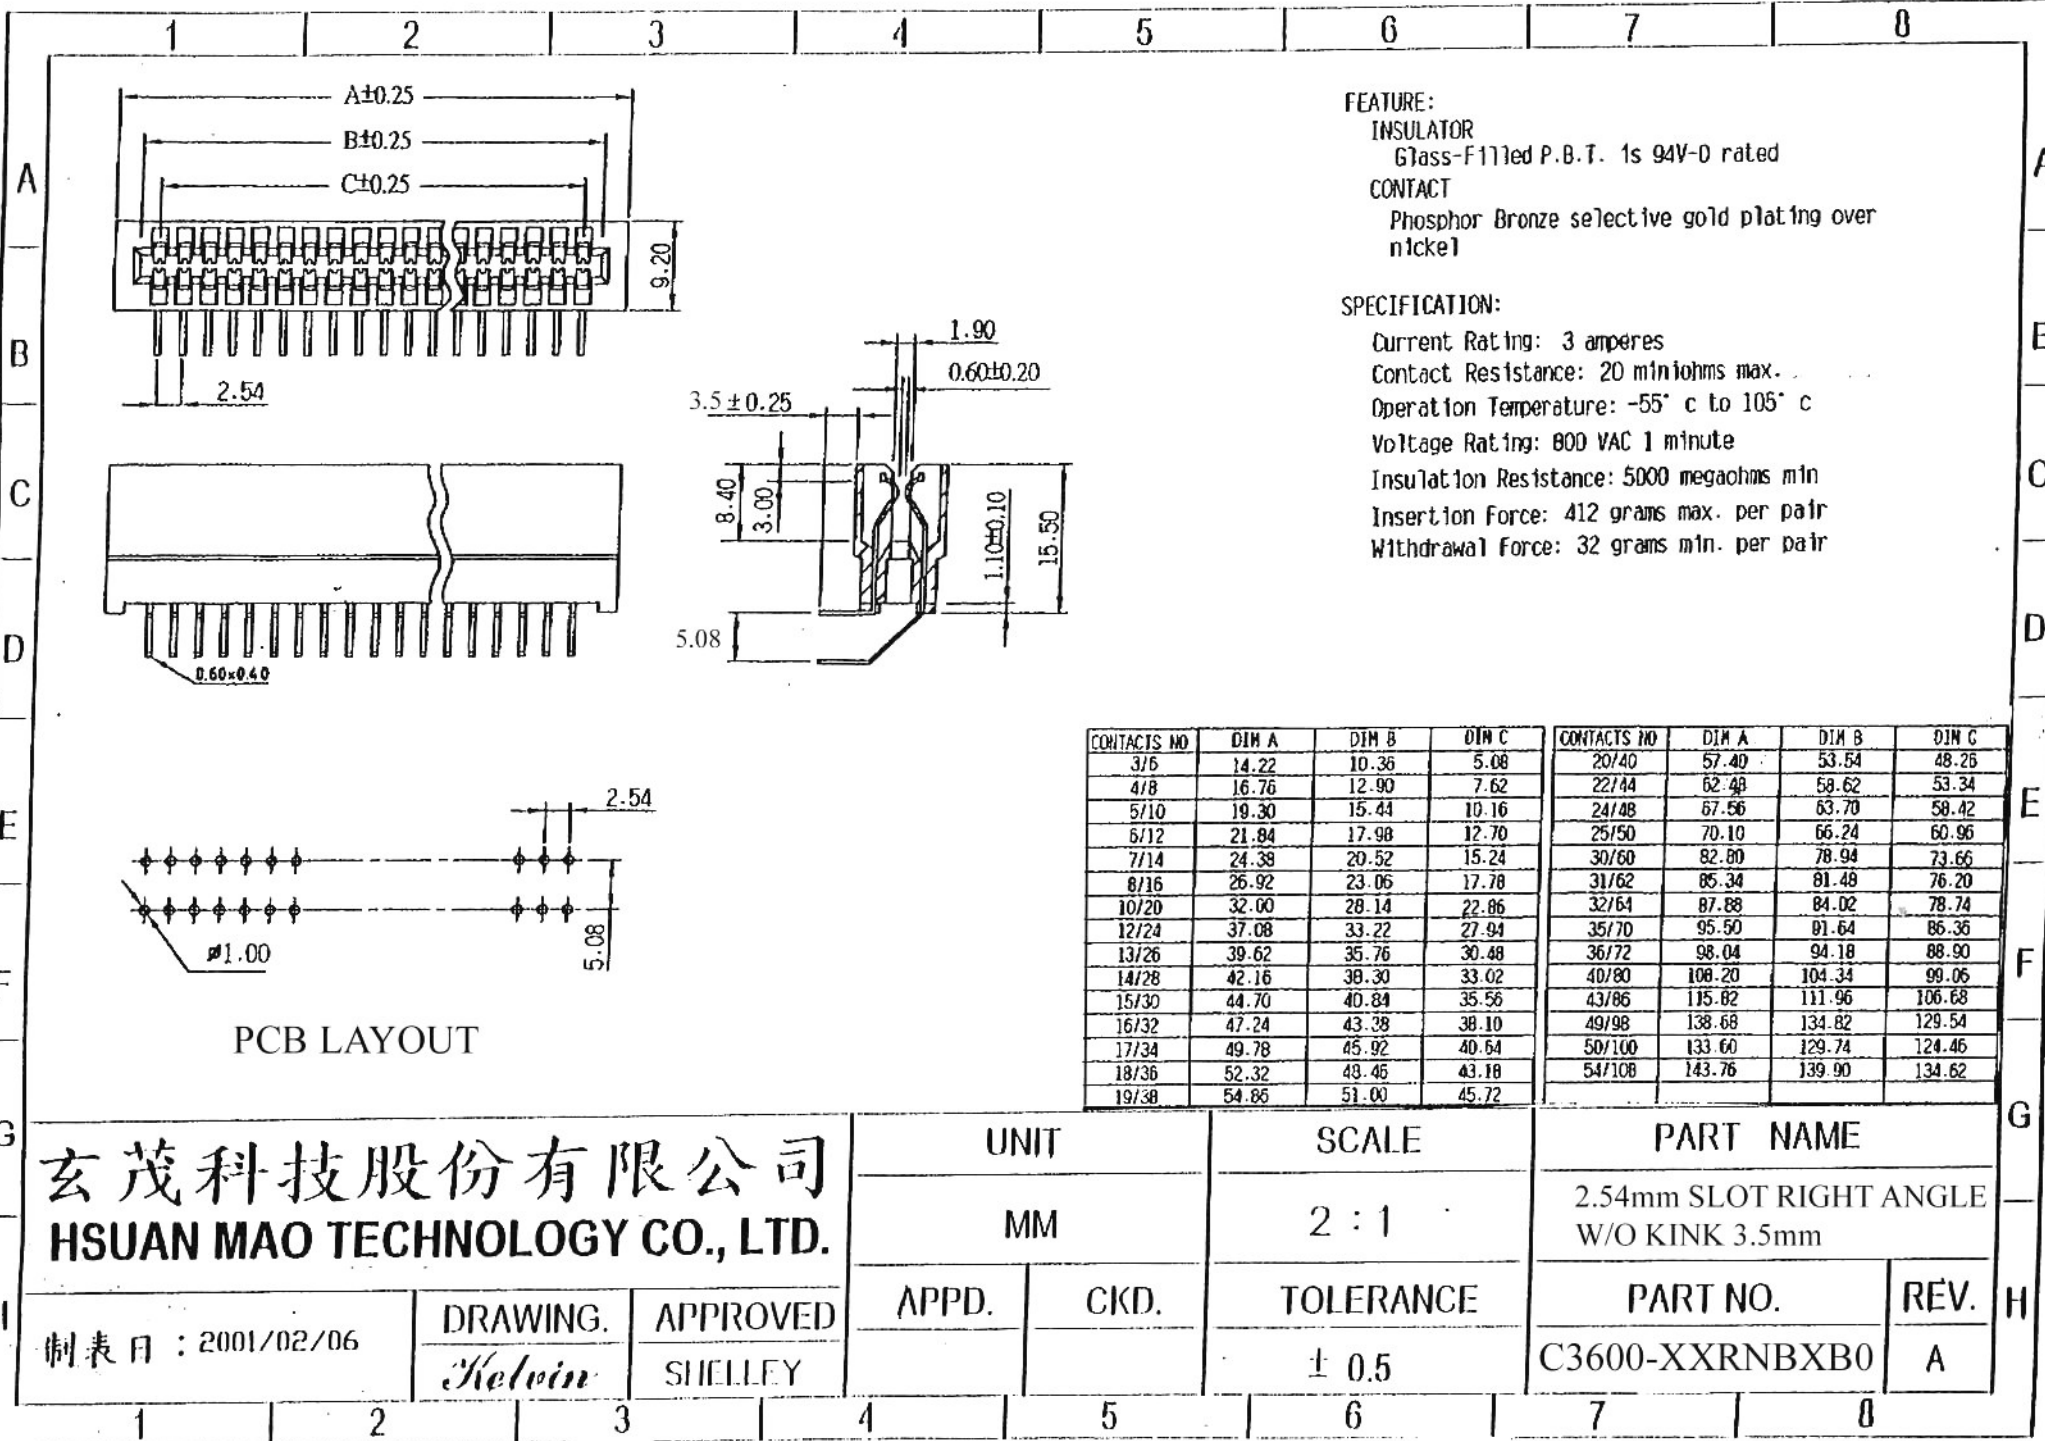

FEATURE:
INSULATOR
Glass-Filled P.B.T. 1s 94V-0 rated
CONTACT
Phosphor Bronze selective gold plating over nickel

SPECIFICATION:
Current Rating: 3 amperes
Contact Resistance: 20 miniohms max.
Operation Temperature: -55° c to 105° c
Voltage Rating: 800 VAC 1 minute
Insulation Resistance: 5000 megaohms min
Insertion Force: 412 grams max. per pair
Withdrawal Force: 32 grams min. per pair

CONTACTS NO	DIM A	DIM B	DIM C	CONTACTS NO	DIM A	DIM B	DIM C
3/6	14.22	10.36	5.08	20/40	57.40	53.54	48.26
4/8	16.76	12.90	7.62	22/44	62.48	58.62	53.34
5/10	19.30	15.44	10.16	24/48	67.56	63.70	58.42
6/12	21.84	17.98	12.70	26/50	70.10	66.24	60.96
7/14	24.38	20.52	15.24	30/60	82.80	78.94	73.66
8/16	26.92	23.06	17.78	31/62	85.34	81.48	76.20
10/20	32.00	28.14	22.86	32/64	87.88	84.02	78.74
12/24	37.08	33.22	27.94	35/70	95.50	91.64	86.36
13/26	39.62	35.76	30.48	36/72	98.04	94.18	88.90
14/28	42.16	38.30	33.02	40/80	108.20	104.34	99.06
15/30	44.70	40.84	35.56	43/86	115.82	111.96	106.68
16/32	47.24	43.38	38.10	49/98	138.68	134.82	129.54
17/34	49.78	45.92	40.64	50/100	133.60	129.74	124.46
18/36	52.32	48.46	43.18	54/108	143.76	139.90	134.62
19/38	54.86	51.00	45.72				

PCB LAYOUT

玄茂科技股份有限公司
HSUAN MAO TECHNOLOGY CO., LTD.

制表日: 2001/02/06
DRAWING: Kelvin
APPROVED: SHELLEY

UNIT		SCALE		PART NAME	
MM		2 : 1		2.54mm SLOT RIGHT ANGLE W/O KINK 3.5mm	
APPD.	CKD.	TOLERANCE		PART NO.	REV.
		± 0.5		C3600-XXRNBXB0	A