
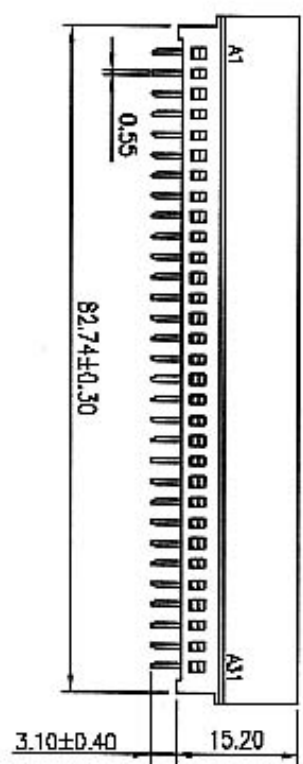
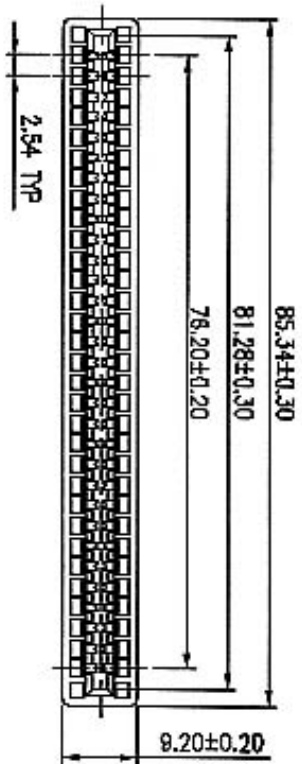



RECOMMENDED PCB LAYOUT

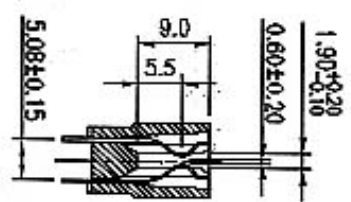

DETAIL OF KINKED

MATERIAL
 INSULATOR: GLASS-REINFORCED THERMOPLASTIC (PET),
 U194V-0 RATED.
 CONTACT: COPPER ALLOY.
 PLATING: MATING AREA- SELECT GOLD OVER NICKEL.
 SOLDER AREA- T1W/LEAD OVER NICKEL.

ELECTRICAL
 DIELECTRIC WITHSTANDING VOLTAGE: 1,000 VAC RMS.
 CURRENT RATING: 3 AMP.
 INSULATION RESISTANCE: 5,000 MEG OHMS MIN. AT 500 VDC.
 CONTACT RESISTANCE: 20 MILL OHMS MAX.

MECHANICAL
 INSERTION FORCE: 340 GRAMS MAX PER CONTACT PAIR.
 WITHDRAWAL FORCE: 28 GRAMS MIN PER CONTACT PAIR.

ENVIRONMENTAL
 TEMPERATURE RANGE: -55° TO +105°.

玄茂科技股份有限公司
 HSUAN MAO TECHNOLOGY CO., LTD.

制表日: 2004/9/12

DRAWING.		APPROVED		APPD.		CKD.		TOLERANCE		PART NO.		REV.	
Kevin								±0.5		C3600-XXSNCXX0		A	

UNIT	SCALE	PART NAME
MM		CARDEDGE SLOT, 2.54mm PITCH

1	2	3	4	5	6	7	8
H	G	F	E	D	C	B	A