



1 2 3 4 5 6 7 8


A

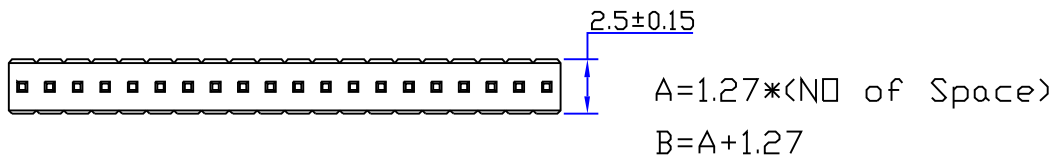

B

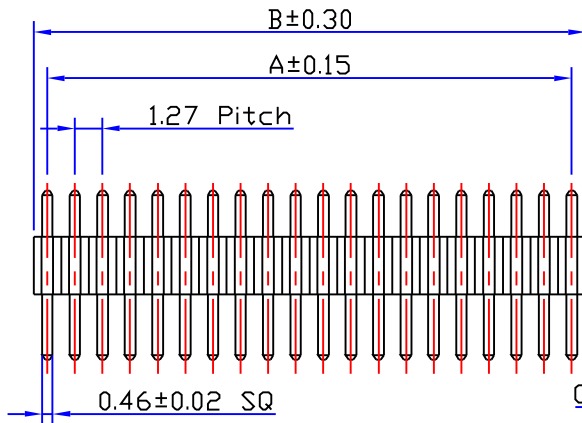

C




D

SPECIFICATIONS

Current Rating: 1 Amps
Dielectric Withstanding: AC 500V
Operating Temperature: -40°C to $+105^{\circ}\text{C}$
Max Processing Temp.: 230° for 30~60 seconds
(260° for 10 seconds)

MATERIAL&FINISH

Contact: Brass
Insulator Material: Nylon 6T
Color: Black
Finish: Gold Flash Plated Over Nickel

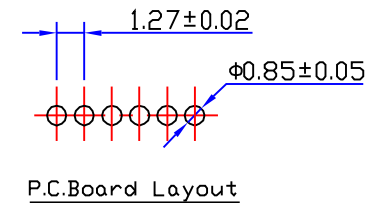

A

B

C

D

E

ORDER INFORMATION

Contact No.	Row Type	Contact Type	Contact Plating	Pin Length (mm)	Others
C1170 — 50	A	S	G	A S	0

02(1X2)~50(1X50) A: Single Row

S: Straight

T: Tin
S: Selective Gold
G: Gold Flash
A: Gold 5U"
B: Gold 10U"
C: Gold 15U"
D: Gold 30U"

AS(180°) C=2.85mm D=2.00mm

0: No Option
T: Tube Packing
R: Reel Packing
P: PAD+Tube Packing
Q: PAD+Reel Packing

F

F

G

G

玄茂科技股份有限公司
HSUAN MAO TECHNOLOGY CO., LTD.

UNIT

SCALE

PART NAME

MM

3:1

1.27mm PIN HEADER H=2.5mm
180° SINGLE ROW(C=2.85 D=2.00)

H

H

制表日:2003/08/19

DRAWING.

APPROVED

APPD.

CKD.

TOLERANCE

PART NO.

REV.

Jane

± 0.2

C1170-XXASXAS0

A

1 2 3 4 5 6 7 8