


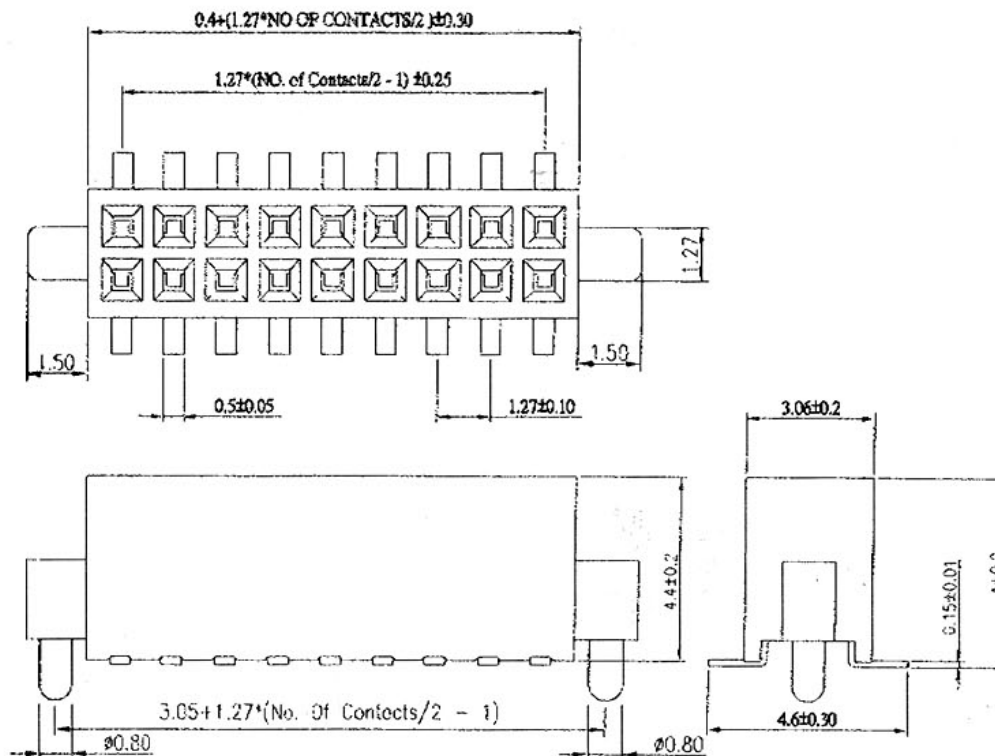

SPECIFICATION


- * Current Rating:
1 A
- * Withstanding Voltage:
500 VAC (1 min.)
- * Insulation Resistance:
1000 Megohms MIN.
- * Contact Resistance:
30 Milliohms MAX.
- * Operating Temperature:
-55°C to +105°C
- * Retention Force:
450g MIN.

MATERIAL

- * Contact: Phosphor Bronze
- * Insulator: Nylon 6T + 30% G.F.
- * Plating: Au Gold

Pin Chart

Pin	A
11	4.5



玄茂科技股份有限公司
HSUAN MAO TECHNOLOGY CO., LTD.

制表日:2005/06/15

DRAWING.

kevin

APPROVED

UNIT

MM

APPD.

CKD.

SCALE

TOLERANCE

± 0.5

PART NAME

1.27mm x 1.27mm Female Header Dual Row
SMT TYPE H:4.4mm W/Locating Peg

PART NO.

C4828-XXBDGHYT

REV.

A