





5.3±0.15

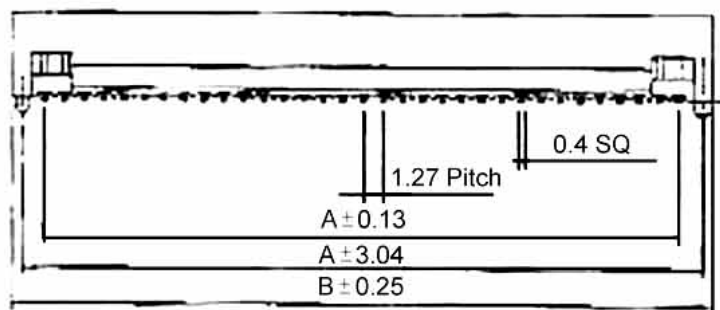

5.4±0.15


1.27 Pitch
A±0.13
A±3.04
B±0.25

0.4 SQ




0.8±0.25
5.6±0.20
1.3±0.2

5.5±0.5

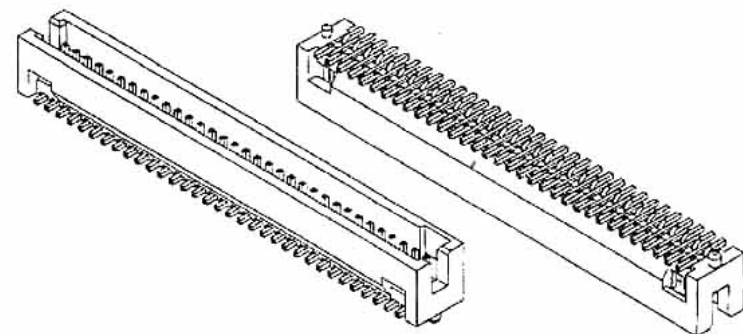

Ø0.75

Ø1.1

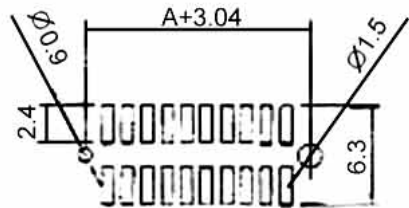

A+3.04

Ø0.9

Ø1.5

2.4

6.3

P.C.Board Layout

Conteract:
Contact:Brass.
Insuiator:Nylon6T.
Finish:Gold flash plated over nickel.

Circuits	Dimension	
	A	B
6	2.54	6.80
10	5.08	9.34
12	6.35	10.61
14	7.62	11.88
16	8.89	13.15
20	11.43	15.69
26	15.24	19.50
30	17.78	22.04
34	20.32	24.58
40	24.13	28.39
44	26.67	30.93
50	30.48	34.74
60	36.83	41.09
64	39.37	43.63
66	40.64	44.90
68	41.91	46.17
80	49.53	53.79
100	62.23	66.49

玄茂科技股份有限公司
HSUAN MAO TECHNOLOGY CO., LTD.

UNIT

SCALE

PART NAME

MM

1.27mm * 1.27mm Box Header
SMT TYPE

制表日: 2005/12/23

DRAWING.

APPROVED

APPD.

CKD.

TOLERANCE

PART NO.

REV.

Jolin

C7510-XXDNXB00R

A