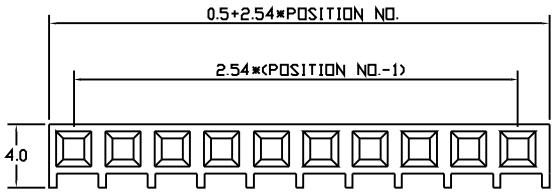



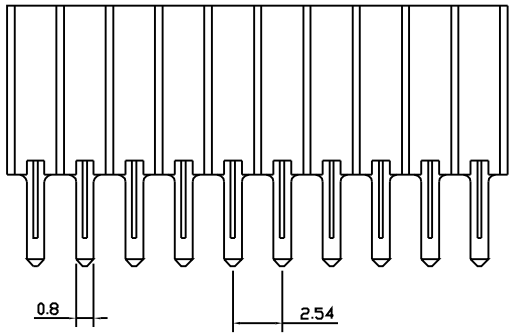



MATERIAL

INSULATOR-PBT (UL94V-0)
CONTACT-COPPER ALLOY

SPECIFICATIONS

CURRENT RATING
1 AMP DC
CONTACT RESISTANCE
30 MILLIOHM MAX
INSULATION RESISTANCE
1000 MEGOHM MIN
DIELECTRIC VOLTAGE
500V AC FOR ONE MINUTE
OPERATING TEMPERATURE
-40℃ TO 105℃

ORDER INFORMATION

C2810 –

Contact No.	Row Type	Contact Type	Contact Plating	Insulator Height		
40	A	S	G	H	0	0
02~40 (1X2~1X40)	A: Single Row	S: Straight	T: Tin S: Selective Gold G: Gold Flash	H: 8.6mm	Fill It With "0"	Fill It With "0"

玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.			UNIT	SCALE	PART NAME	
			MM	2 : 1	P:2.54 FEMALE HEADER PROFILE :8.6MM STRAIGHT	
制表日:2000/06/07	DRAWING.	APPROVED	APPD.	CKD.	TOLERANCE	PART NO.	REV.
	RANDY	TINA			± 0.5	C2810-XXASXH00	A

PDF created with pdfFactory trial version www.pdffactory.com