




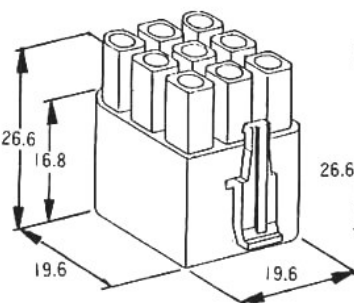
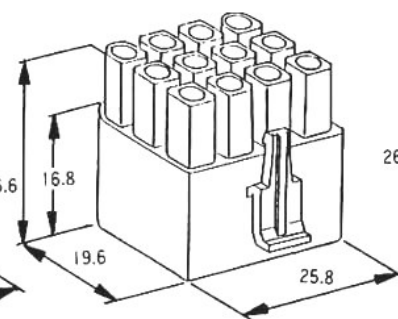
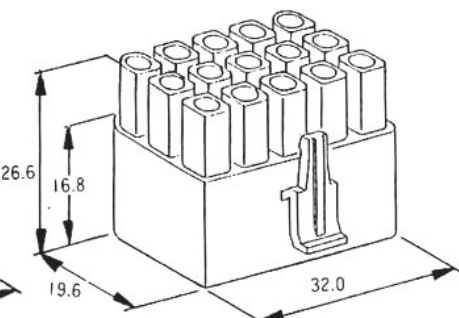


	1	2	3	4	5	6	7	8			
A											
B											
C	 H2120-01PSW000	 H2120-02PSW000	 H2120-03PSW000	 H2120-04PSW000	SPECIFICATION Current Rating: 8A AC, DC Voltage Rating: 250V AC, DC Temperature Range: -25℃ ~ +85℃ Contact Resistance: 10mΩ Max. Insulation Resistance: 1,000MΩ Min. Withstand Voltage: 1,000M Min. Material: Nylon Color: White						
D											
E											
F	 H2120-06PDW000	 H2120-09PTW000	 H2120-12PTW000	 H2120-15PTW000							
G											
H	玄茂科技股份有限公司 HSUAN MAO TECHNOLOGY CO., LTD.			UNIT		SCALE	PART NAME				
				MM		1:1	7.0mm Ø2.0 HOUSING MALE				
				APPD.	CKD.	TOLERANCE	PART NO.	REV.			
	制表日:2002/12/15		DRAWING.	APPROVED			± 0.3	H2120-XXPXW000	A		
	Jane										
	1	2	3	4	5	6	7	8			

玄茂科技股份有限公司
 HSUAN MAO TECHNOLOGY CO., LTD.

制表日: 2002/12/15

DRAWING.

Jane

APPROVED

APPD.

CKD.

TOLERANCE

± 0.3

PART NO.

H2120-XXPXW000

REV.

A