


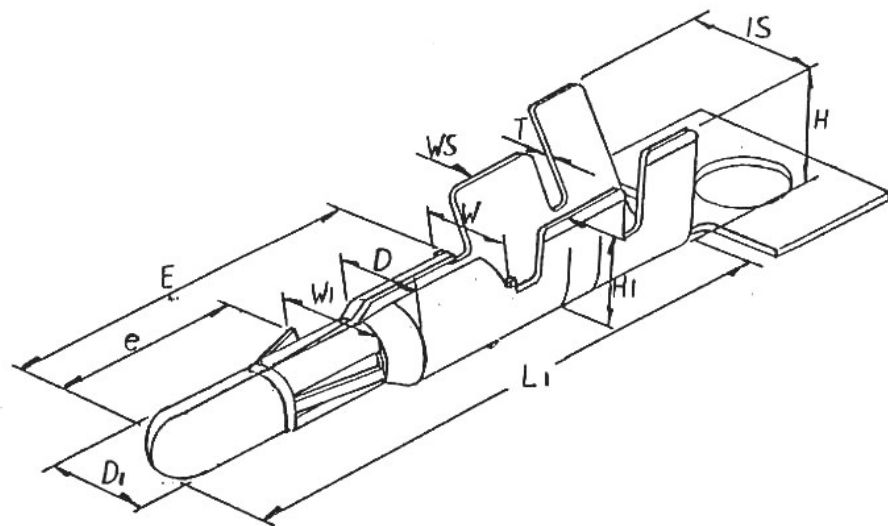

DIMENSION: (MM)

T: 0.25 ± 0.03
 L1: 20.5 ± 0.35
 E: 12.7 ± 0.25
 W: 4.0 ± 0.25
 W1: 4.4 ± 0.25
 IS: 5.0 ± 0.35
 WS: 3.3 ± 0.35
 H: 4.9 ± 0.25
 H1: 3.6 ± 0.25
 D1: 2.0 ± 0.06
 e: 8.7 ± 0.25
 D: $3.1^{+0.05}_{-0.2}$

SPECIFICATION

Current Rating: 8A AC, DC
 Voltage Rating: 250V AC, DC
 Temperature Range:
 $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
 Contact Resistance: 10m Max.
 Insulation Resistance:
 1,000M Min.
 Withstand Voltage: 1,000M Min.
 Material: Brass, Tin Plated
 Thickness: 0.25MM
 Insulation O.D.: 3.8Max.
 Wire Range: 14-18AWG
 Q' TY: 3,500pcs/Roll

玄茂科技股份有限公司
 HSUAN MAO TECHNOLOGY CO., LTD.

制表日: 2002/12/15

DRAWING.

Jane

APPROVED

APPD.

CKD.

TOLERANCE

± 0.3

PART NO.

T2020-TBA00000

REV.

A

UNIT

MM

SCALE

1:1

PART NAME

7.0mm Ø2.0 HOUSING
FEMALE