


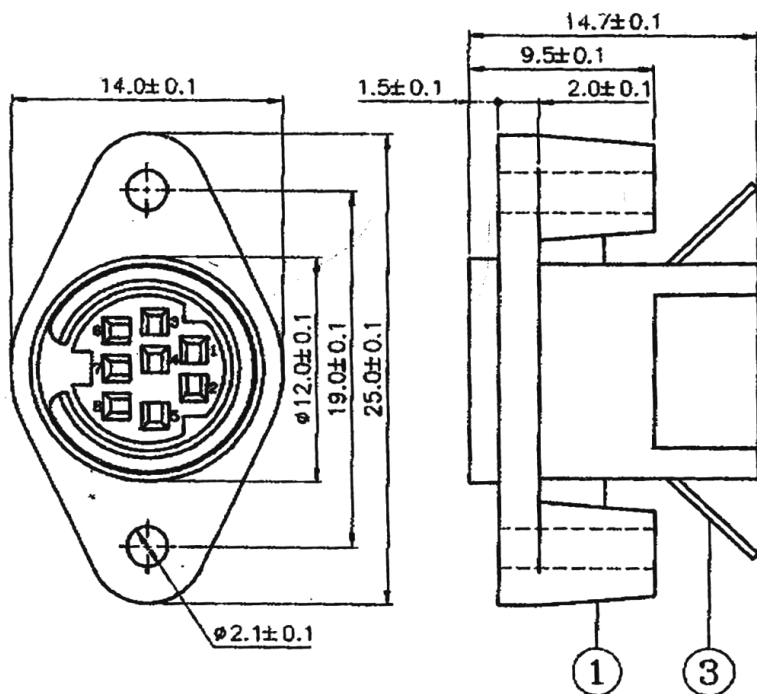

SPECIFICATIONS:

- CONTACT CARRYING CAPACITY : AC : 100V 1A MAX
DC : 12V 2A MAX
- CONTACT RESISTANCE : 30m OHM MAX
- INSULATION RESISTANCE : 50M OHM MIN. AT DC 250V
- VOLTAGE WITHSTAND : AC 250V FOR ONE MINUTE
- INSERTION FORCE : 1.0 - 4.5KG
WITHDRAWAL FORCE : 0.8 - 3.0KG

3.	EARTH TERMINAL	1	BSR-H 0.4t	Pb10%, Sn90%	
1.	BODY	1	P.B.T.	VALOX 420-SEO	UL94V-0
P/N	PART NAME	Q'TY	MATERIAL	PLATING	REMARKS

ARRANGEMENT OF CONTACT						
NO. OF CONTACT	3	4	5	6	7	8
PART NO.	C8012-03ATB000	C8012-04ATB000	C8012-05ATB000	C8012-06ATB000	C8012-07ATB000	C8012-08ATB000

玄茂科技股份有限公司
HSUAN MAO TECHNOLOGY CO., LTD.

UNIT

SCALE

PART NAME

MM

3:1

MINIATURE CIRCULAR CONN.
(CRIMPING TYPE)

APPD.

CKD.

TOLERANCE

PART NO.

REV.

制表日:2003/08/26

DRAWING.

APPROVED

Jane

± 0.3

C8012-XXATB000

A