



A
B
C
D
E
F
G
H

A
B
C
D
E
F
G
H

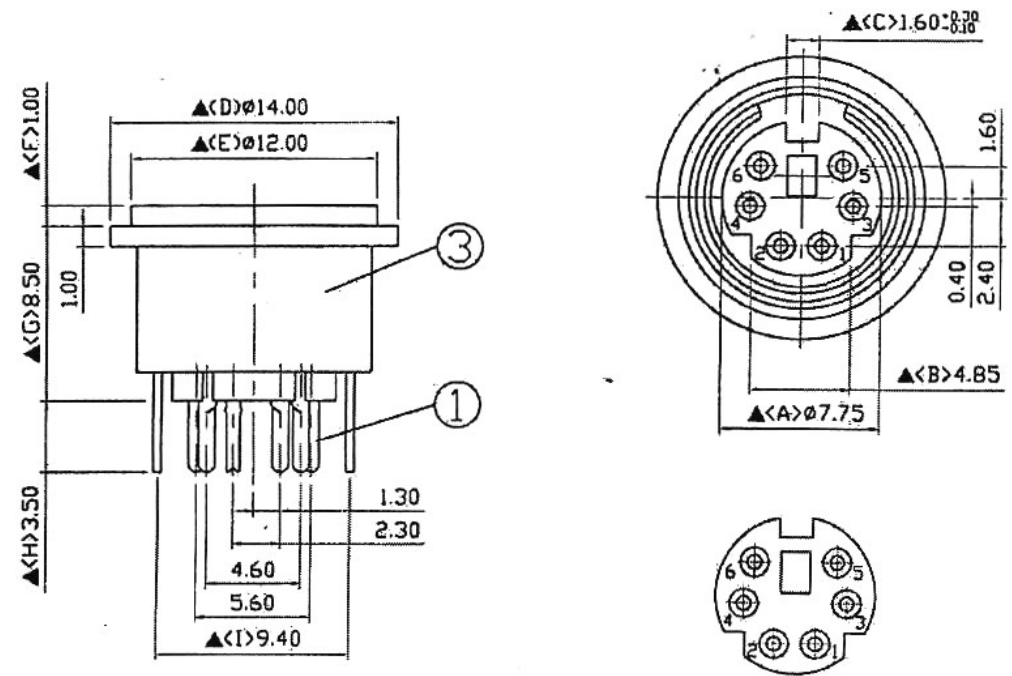

Arrangement of Contact

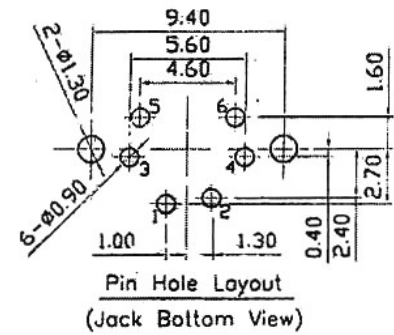

3.	Housing	PBT	1	Black Color
2.	Shell	0.4T Brass	1	Nickel Plating
1.	Terminal	0.2T Phosphor Bronze	6	Silver Plating
NO.	Description	Material	Q'TY	Finish

SPECIFICATION

Contact Resistance: 30m ohms Max.
Insulation Resistance: 100M ohms Min. at DC 500V
Dielectric Withstanding Voltage: 500V AC /minute.

玄茂科技股份有限公司
HSUAN MAO TECHNOLOGY CO., LTD.

制表日: 2001/06/15	DRAWING.	APPROVED
	Jane	

UNIT		SCALE	PART NAME	
MM		3: 1	MINI DIN JACK 6P (VERTICAL TYPE)	
APPD.	CKD.	TOLERANCE	PART NO.	REV.
		± 0.3	C8101-06PXB000	A

1 2 3 4 5 6 7 8