
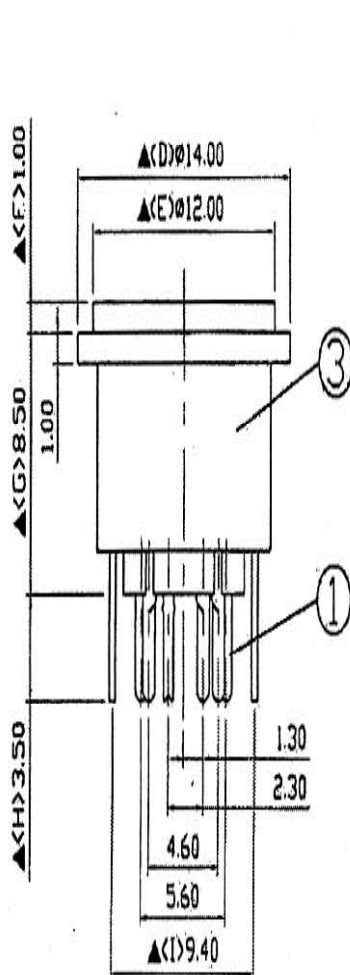


Arrangement of Contact

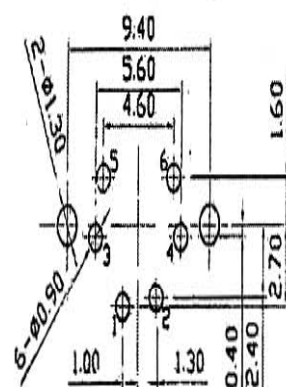

Pin Hole Layout
(Jack Bottom View)

3.	Housing	PBT	1	Black Color
2.	Shell	0.4T Brass	1	Nickel Plating
1.	Terminal	0.2T Phosphor Bronze	6	Silver Plating
NO.	Description	Material	Q'TY	Finish

SPECIFICATION

Contact Resistance: 30m ohms Max.

Insulation Resistance: 100M ohms Min. at DC 500V

Dielectric Withstanding Voltage: 500V AC /minute.

玄茂科技股份有限公司
HSUAN MAO TECHNOLOGY CO., LTD.

制表日: 2001/06/15

DRAWING.

APPROVED

Jane

UNIT

MM

APPD.

CKD.

SCALE

3:1

TOLERANCE

± 0.3

PART NAME

MINI DIN JACK 6P
(VERTICAL TYPE)

PART NO.

C8101-06PXB000

REV.

A