



深圳市金科特种材料有限公司
SHENZHEN JINKE SPECIAL MATERIALS CO.,LTD

[中文 | CHINESE](#)

[HOME](#)
[ABOUT](#)
[PRODUCT](#)
[CONTACT](#)
[SITEMAP](#)



[PRODUCT](#) > [PPTC](#) > JK-30


 OUR PRODUCTS

[③ CPTC](#)

[③ PPTC](#)


 OUR TECHNOLOGY

[③ TECHNOLOGY OF PTC](#)

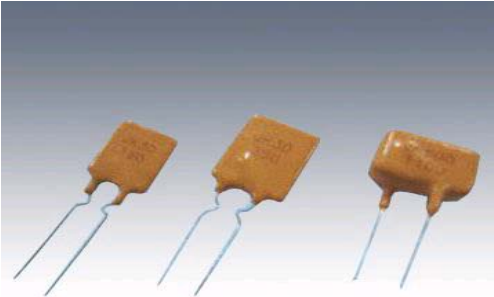

[Key Specifications/Special Features](#)
[Electrical characteristics \(25°C\)](#)

Key Specifications/Special Features:
Appearance of Products

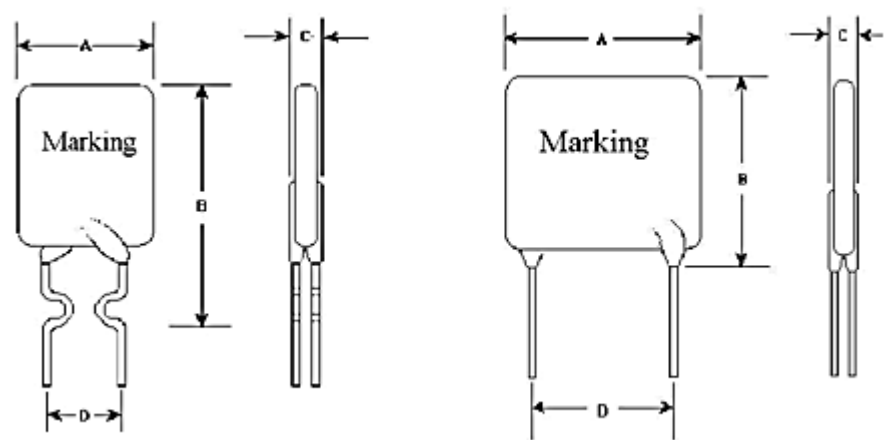

- Widely used in ecumenic appliances
- Double functions:overcurrent and automatic restoration
- Electrical characteristics (25°C)

Electrical characteristics (25°C)

Model	Vmax (V)	Imax (A)	Ih (mA)	Rmax (Ω)	Rmin (Ω)	Fig.	Pd (W)	Maximum Contour Size(mm)				
								A	B	C	D	E
JK30-090	30	40	0.90	0.22	0.130	1	0.60	7.40	12.2	5.10	7.6	3.0
JK30-110	30	40	1.10	0.20	0.090	1	0.70	7.40	12.2	5.10	7.6	3.0
JK30-135	30	40	1.35	0.16	0.070	1	0.80	9.20	13.5	5.10	7.6	3.0
JK30-160	30	40	1.60	0.14	0.060	1	0.90	9.20	15.2	5.10	7.6	3.0
JK30-185	30	40	1.85	0.12	0.050	1	1.00	9.20	15.2	5.10	7.6	3.0
JK30-200	30	40	2.00	0.10	0.040	1	1.20	15.2	15.2	5.10	7.6	3.1
JK30-250	30	40	2.50	0.08	0.030	1	1.20	13.2	18.3	5.10	7.6	3.0
JK30-300	30	40	3.00	0.07	0.030	2	2.00	13.2	17.3	5.10	7.6	3.0
JK30-400	30	40	4.00	0.06	0.020	2	2.50	14.0	20.1	5.10	7.6	3.0
JK30-500	30	40	5.00	0.05	0.015	2	3.00	14.0	20.1	10.2	7.6	3.0
JK30-600	30	40	6.00	0.04	0.005	2	3.50	17.2	24.9	10.2	7.6	3.0
JK30-700	30	40	7.00	0.03	0.005	2	3.80	17.2	24.9	10.2	7.6	3.0
JK30-800	30	40	8.00	0.025	0.005	2	4.00	23.5	29.2	10.2	7.6	3.0
JK30-900	30	40	9.00	0.02	0.005	2	4.20	23.5	29.7	10.2	7.6	3.0

Note:

JINKE is providing customer with application supporting , and products can be tailor made according to customer different usage. Please consult our sales engineer



| [HOME](#) | [ABOUT](#) | [PRODUCT](#) | [CONTACT](#) | [SITEMAP](#) | [>>TOP](#)

Copyright | 2004 | Shenzhen Jinke Special Materials Co., Ltd.
Tel: +86-755-2671 7228 Fax: 26639771
Email: sales@szjinke.com.cn