
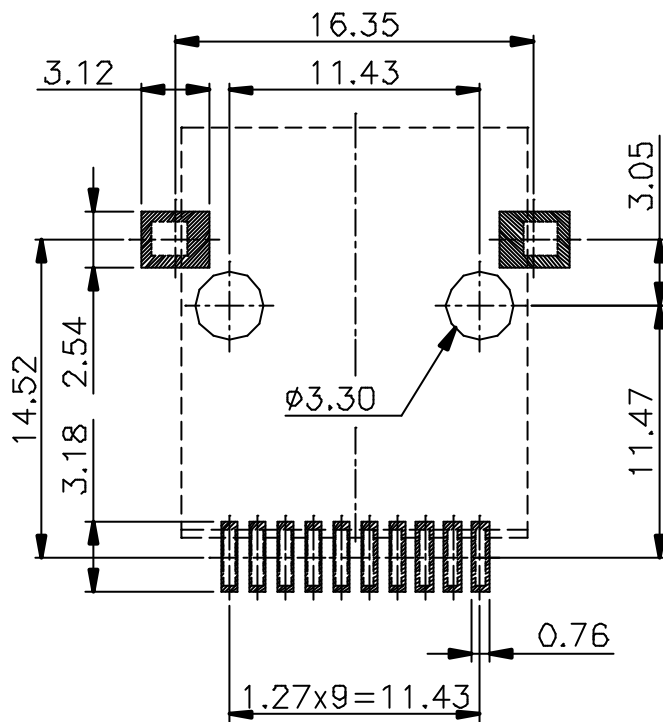
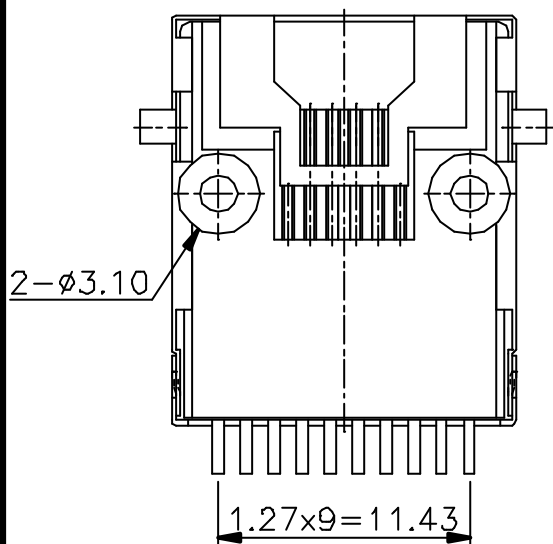
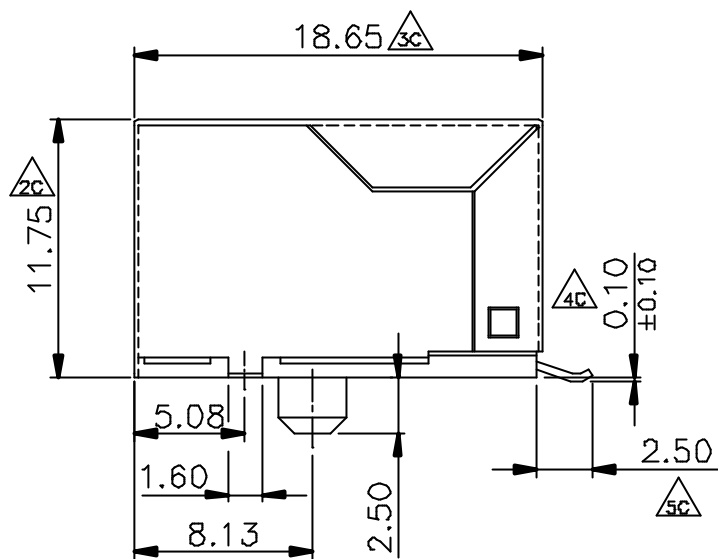


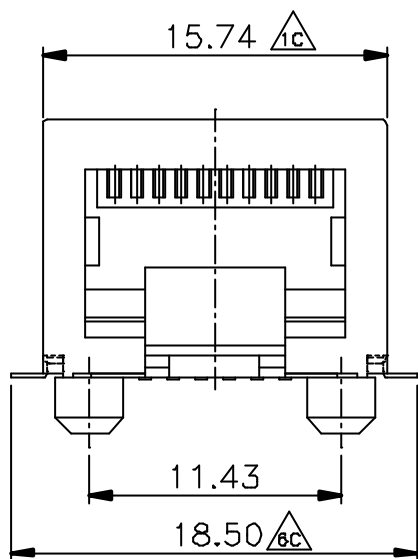

※凡標註 $\triangle$ 記號者為品管管制尺寸。

MATERIAL:

SHIELDED: 0.2mm THICKNESS COPPER ALLOY WITH NICKEL PLATED.

HOUSING: NY-46 WITH GLASS/FIBER UL-94V-0 STANDARD COLOR (BLACK).

INSERT: NY-46 WITH GLASS/FIBER UL-94V-0, COLOR BLACK.

CONTACT: 0.35mm THICKNESS ALLOY C5210,

GOLD PLATING OVER NICKEL IN CONTACT AREA.

TIN PLATING OVER NICKEL IN SOLDER AREA.

Gold Plating: Selective Gold Plating

6u" P/N :3004628121

15u" P/N :3004628221

30u" P/N :3004628321

50u" P/N :3004628421

修正 REVISION	日期 DATE	容許公差 TOLERANCE	品名 RJ46 SURFACE MOUNT ARTICLE 8P10C SMT JACK (SHIELDED)
		.XXXX ----	圖號 3004628121
		.XXX ±0.10	DWG NO.
		.XX ±0.25	單位 UNIT
		.X ±0.38	比例 SCALE
		核准 APPD.	張數 SHEET
		校對 CHKD.	版次 REV.
		設計 DR. Kathy 89-03-07	mm 3/1 1/1 A

KINSUN 慶陞